

Lightning Protection Solutions

nVent ERICO System 2000



nVent Engineered Electrical & Fastening Solutions is a leading global manufacturer and marketer of superior engineered products for niche electrical, mechanical and concrete applications. These nVent products are sold globally under a variety of market-leading brands: nVent ERICO welded electrical connections, facility electrical protection, and rail and industrial products; nVent CADDY fixing, fastening and support products; nVent ERIFLEX low voltage power and grounding connections; and nVent LENTON engineered systems for concrete reinforcement.

For more information please visit nVent.com/ERICO.



CHAPTER CONTENTS

| INTRODUCTION | 4 |
|---|-------|
| THE NEED FOR LIGHTNING PROTECTION | 5-8 |
| ISOMETRIC VIEW OF CABLE LIGHTNING PROTECTION LAYOUT | 9 |
| TYPICAL INSTALLATION DRAWINGS | 10-12 |
| CONDUCTORS | 13-16 |
| AIR TERMINALS & ADAPTORS | 17-20 |
| POINT BASES, BRACES & ACCESSORIES | |
| INDUSTRIAL STACK EQUIPMENT | 27-32 |
| CONDUCTORS, CLAMPS, PLATES & LUGS | 33-38 |
| THROUGH ROOF, THROUGH WALL & CABLE PROTECTORS | |
| GROUNDING ACCESSORIES | |
| NVENT ERICO CADWELD LIGHTNING PROTECTION MOLDS | 49-52 |
| CABLE FASTENERS & ACCESSORIES | 53-56 |
| INDEX | 57-60 |

nVent designs and manufactures products to comply with various national and international standards. The lightning protection components in this catalog have been designed to comply with UL®96 unless otherwise noted. Due to the fact that standards are continually changing, please refer to our website for the latest compliance information.



Lightning protection, grounding, equipotential bonding and surge protection are all interdependent disciplines and the focus of the nVent ERICO brand of facility electrical protection products. Reliable protection of structures, industrial and commercial operations and personnel demands a systematic and comprehensive approach to minimizing threats caused by transients. For instance, no air terminal can safely capture and arrest the lightning energy without a dependable route to ground. Equally, even the most expensive Surge Protection Device (SPD) will not provide optimum protection if a lowimpedance electrical connection to the ground is not present. Additionally, a low-impedance ground system may create hazards to equipment and personnel alike if equipotential bonding practices are not followed. These interdependent disciplines are best applied when looking at a total facility rather than an individual piece of equipment or a portion of the facility. The nVent team of qualified applications engineers is here to help with such problems.

Since no single technology can eliminate the harmful effects of lightning or induced-surge transients, nVent has developed the Six Point Plan of Protection. The concept behind this plan is to prompt the user to consider a holistic and coordinated approach to lightning protection that embraces all aspects of potential damage. This ranges from the more obvious direct strike to the more subtle mechanisms of differential earth potential rises and voltage reduction at service entry points.

The Six Interdependent Disciplines that form the Protection Plan are:

- 1. Capture the lightning strike
- 2. Convey this energy to ground
- 3. Dissipate the energy into the grounding system
- 4. Bond all ground points together
- 5. Protect incoming AC power feeders
- 6. Protect low-voltage data/telecommunications circuits

nVent ERICO System 2000 Lightning Protection Products

This catalog details the System 2000 lightning protection products to meet the needs of points 1 and 2 of the Six Point Plan. For more information on the range of products designed to cover points 3 through 6, please request a copy of the nVent ERICO Grounding, nVent ERICO Cadweld Electrical Connections or the Surge Protection Products catalogs. A portion of nVent's offering for points 3 and 4 is presented.

At nVent, we offer innovative and efficient products along with engineering expertise and top-quality technical support. nVent's quality-assurance program helps ensure that required procedures for every step of the operation produce the best possible system for our clients. nVent also maintains a comprehensive global knowledge pool to meet the challenging requirements of ever-evolving regional and industry applications.

There is no known method of preventing the occurrence of a lightning discharge. The purpose of a lightning protection system, therefore, is to control the passage of a discharge in such a manner that prevents personal injury or property damage.

The need to provide protection should be assessed in the early stages of the structure design. Although no strict rules can be given, it is possible to use broad guidelines to arrive at the degree of protection required.

Critical Factors to be Considered:


- 1. What is the risk to personnel?
- 2. What is the risk of equipment or structural damage?
- What are the consequential problems of such failure?
- Is the equipment associated with an essential/public
- Is there likely to be substantial revenue loss in the time taken to restore services?
- Is the structure of historical importance?
- What are the legal implications of providing inadequate protection?
- 8. Can the passage of a discharge in a structure or a building give rise to side flashing or simple sparks in an explosive or flammable environment? i.e: The extraction and storage of gas or oil, storage and manufacture of explosives, etc.
- Can side flashing between metallic structures (as in a ship) cause damage to essential electronics?
- 10. Will the discharge give rise to corona phenomena causing disastrous surges on the phase wires of electric lines or breakdown in transformer stations?

The assessment of these factors is one of judgement in comparing risks, economics and aesthetics. Such assessment is not always simple.

Lightning is an Unpredictable Phenomenon

It is possible to estimate the number of ground strikes expected per square kilometer per year and statistically determine the risk of a building being struck. While still useful in modern lightning protection techniques, such statistical calculations should, however, be viewed with caution. As an example, it can be shown that a building in a low intensity area should be struck only once in 20 years. However, it is possible to receive several strikes in one storm and then no more for 30 years.

The random nature of lightning means the role of statistics is quite important in determining the need for protection. The answers, however, to the previous 10 questions are equally important in the assessment of the need for lightning protection.

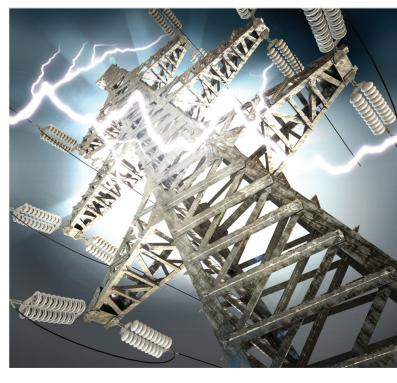

Particularly at Risk:

Installations where lightning protection is highly desirable are summarized as follows:

- Power stations
- · Sub-stations and transformer stations
- · Oil and gas storage and refinery
- · Drilling rigs
- · Grain storage
- · Explosives factories and storage areas
- · Flammable liquid or chemical storage
- · Factories such as chemical, textile, rubber, sugar, glass, paint, etc.
- Mining areas
- · Television, radio and telecommunications stations
- · High rise buildings commercial and apartment complexes
- Hospitals
- Transport airports, shipping, rail etc.
- · Universities, education facilities
- · Historic structures
- · Churches, Mosques, etc.
- · Military installations
- Golf courses, race courses, sports stadiums, etc.
- Farms and food storage areas
- · Buildings containing computers and electronics

In a world of increasingly complex and sophisticated buildings and equipment, lightning is a constant risk. A single direct strike can result in physical damage to buildings and catastrophic failure of sensitive electronic equipment. It can start fires, cause major breakdowns to electrical, telephone and computer installations, and simultaneously cause substantial loss of revenue.

Storm Development and Natural Ionization

A thunderstorm commences with the development of a cumulonimbus thunder cloud. The cloud is typically formed by rapidly rising humid air which becomes electrified due to convection and precipitation effects. This is accompanied by wind speeds of up to 125 miles/hr.

The end result is the separation of positive and negative charges (see Figure 1). In most cases, the lower part of the thundercloud is comprised of a thin, concentrated layer of negative charge, and the upper part comprises a more diffuse positively charged region. The cloud base is typically 1 to 4 miles above the ground and the cloud depth is typically 4 to 8 miles.

As a result of the cloud electrification, a quasi-static electric field is established between the cloud and ground. Pointed ground objects subjected to this ambient electric field emit varying amounts of point discharge or "corona", and the resulting positive or negative ions drift upwards to form a low density "space charge" which extends from ground to cloud. This space charge reduces the electric field observed at ground level, typically from 50 - 60 kV/m at heights of 1640 ft. to 2-15 kV/m at the ground.

4 - 8 miles 1 - 4 miles

Figure 1. Typical positive and negative charge distribution in the cumulonimbus cloud

The Lightning Discharge

Within the confines of the cloud, static electricity builds to an extent where one or more neutralizing discharges or flashes occur. These flashes can be in the form of an inter-cloud (cloudto-cloud), intra-cloud (within cloud) or cloud-to-ground flash.

The dramatic cloud-to-ground flash is of most concern. This dynamic phase of lightning commences in the form of a luminescent downward leader from the base of the cloud, which proceeds in a series of steps and branches toward the ground. The protrusion of ground objects into an ambient electric field (such as that created by a lightning downward leader) increases the electric field at the tip of the object, as shown in Figures 2 and 3.



Figure 2. Field intensification, portrayed with lines of equal voltage (equipotential lines), is a function of the height of the object as well as its degree of "sharpness".

As the downleader approaches, it causes the electric field around points on the surface of the earth to increase rapidly, leading to the initiation of small upward streamers from the elevated points. Under the right conditions, these upward streamers thermalize and become competing upward leaders which propagate toward the approaching downleader, as shown in Figure 4.

The ability of one ground point to develop an upward intercepting leader before other nearby competing points means that it can become the preferred strike point to successfully complete an ionized path between cloud and ground, as shown in Figure 5.

The diagrams on the next page illustrate the varying degrees of electric field intensification created by grounded objects subjected to an ambient electric field (in this case, that of the lightning downward leader).

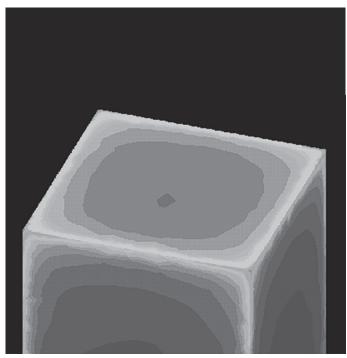
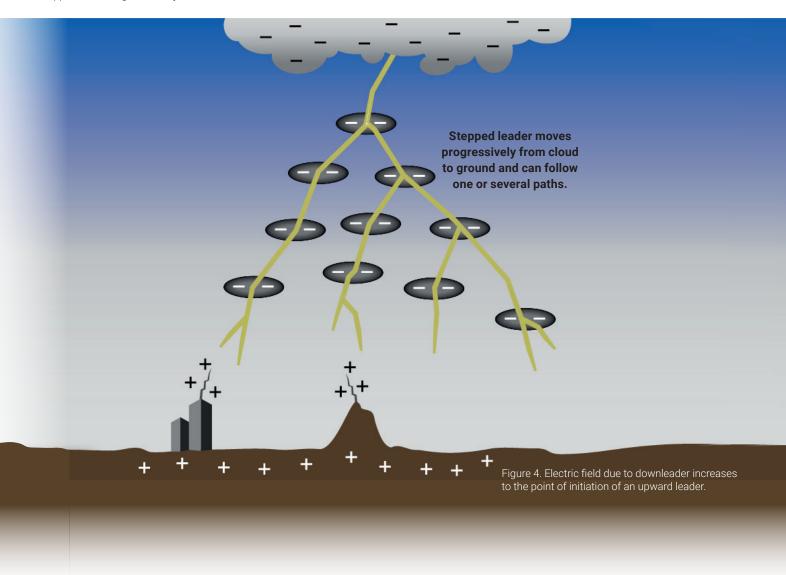


Figure 3. Electric field plot of a real structure in an ambient field, showing that the intensification is high at the corners, moderate on the horizontal and upper vertical edges and very low on flat horizontal and vertical surfaces.



Figure 5. Upward leaders propagate toward downward leader to complete the ionized path between cloud and ground.



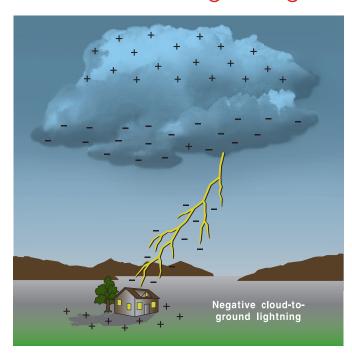


Figure 6. Negative cloud-to-ground lightning.

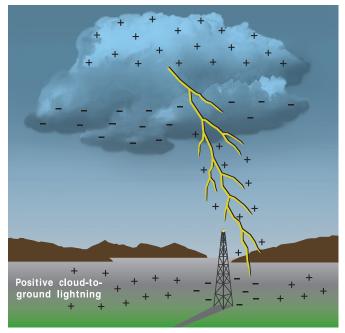


Figure 7. Positive cloud-to-ground lightning. Negative and positive cloud-to-ground lightning typically occurs to an approximate ratio of 90:10.

Typically, 90% of cloud-to-ground flashes transfer negative charge (negative lightning), as shown in Figure 6. Such a flash consists of a sequence of one or more high amplitude, short duration current impulses or strokes. The subsequent strokes are sometimes called restrikes.

A small proportion of flashes transfer positive charge to ground (positive lightning), as shown in Figure 7. Typically 10% of lightning flashes are positive, although this can vary with latitude and season. The parameters for positive lightning differ considerably from their negative counterparts. Some of the main differences are that the:

- restrike phenomenon is absent (no subsequent strokes)
- peak current is higher (~ 2 x)
- maximum rate of rise of current is less (~ 0.1 x)
- total rise time is longer (~ 4 x)
- stroke duration is longer (~ 4 x)
- action integral (energy content) is higher (~ 10 x)

In summary, the main lightning discharge is characterized by a rapidly rising current (averaging about 30,000 Amps) with maximum values exceeding 200,000 Amps. This whole process is extremely rapid, typically occurring within milliseconds. The average energy released in a single discharge may be 55 kW hours. The danger lies in the extremely high rate of current rise (up to 10¹⁰ Amps per second) which can generate very high voltages, and also from the continuing current following the

Without proper intervention to capture and control the passage of this lightning energy to ground, cloud-to-ground lightning can be catastrophic.

Capturing the Lightning Discharge

In general, the highest point of a facility is the most vulnerable to a direct lightning strike. Lightning rods or air terminals are needed to capture the strike to a preferred point, and to help conduct the energy to ground to minimize the risk of damage. The number of terminals required, and their placement, is determined by the chosen lightning protection design method.

The placement of air terminals is a critical part of the lightning protection design process. Since the 1750's the most popular methods of lightning protection have involved sharp vertical rods (Franklin), horizontal and vertical conductors (Faraday Cage or Mesh) or a combination of both. Only if air terminals are placed in the optimum location on the structure is it possible to achieve an efficient and reliable lightning protection system. Historically, a number of methods have been employed, some of which are still in common use, such as the Cone of Protection (Protective Angle), Mesh and Rolling Sphere methods.

Isometric View of Cable Lightning Protection Layout


Legend


| • | Air Terminal Location |
|--------|---|
| | Through Roof Connection Location |
| € | Through Wall Connection Location |
| - 1 | Ground Rod Location |
| w | Through Roof Cable to Steel Connection |
| | No. LPC120 Copper Cable (#2 AWG) |
| _··- | No. LPC126 Copper Cable (Min. Class II Cable) |
| ······ | No. LPC151 Copper Secondary Bonding Wire (#6 AWG) |

| | No. LPC126 Copper Ground Loop Conductor (Min. Class II Cable) |
|--------|---|
| | No. LPA141 Aluminum Secondary Bonding (#4 AWG) |
| | Exhaust Fan |
| | Misc. Mechanical Equipment |
| 0 | Vent Through Roof |
| 8 | Roof Drain |
| A.F.G. | Above Finished Grade |


Note: The lightning protection materials to be used for this type of installation may be aluminum or copper, within the allowances of NFPA® code 780. Some of the criteria for choosing one type of material over another are as follows:


- 1. Matching of materials to which lightning protection components are to be installed for compatibility; aluminum on aluminum, copper on copper, etc.
- 2. Location of materials (i.e. within concrete, below grade, etc.)
- Lightning protection components to match existing lightning protection materials.
- 4. Personal preferences of owner, architect, engineer, etc.

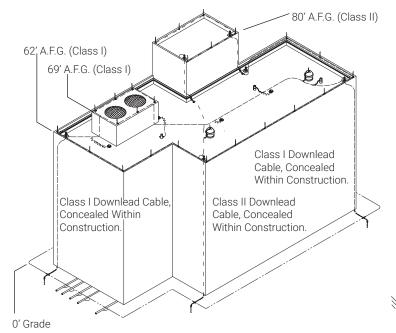


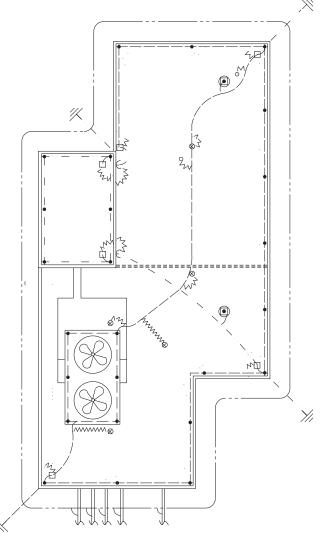


Typical Installation Drawings

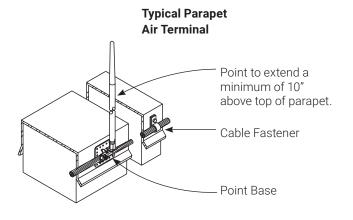


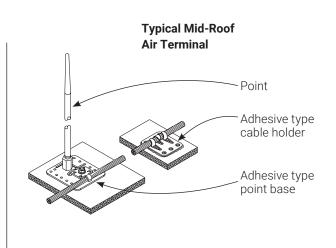


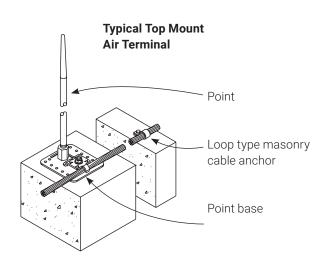

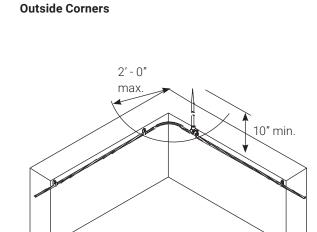


Typical Air Terminal Placement at

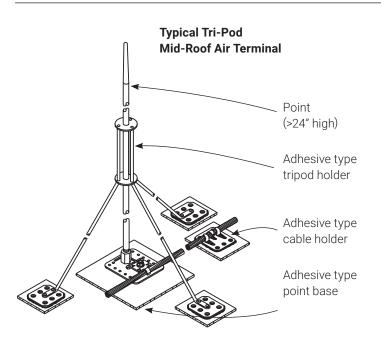


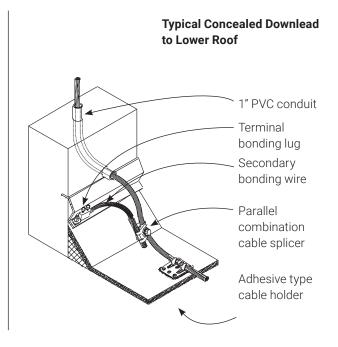


Typical Installation Drawings


Typical Through Roof Connection

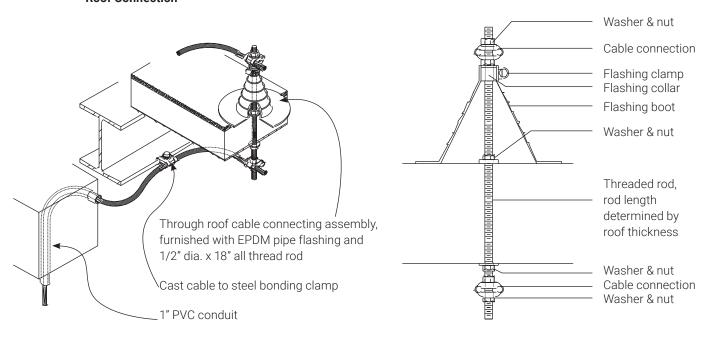


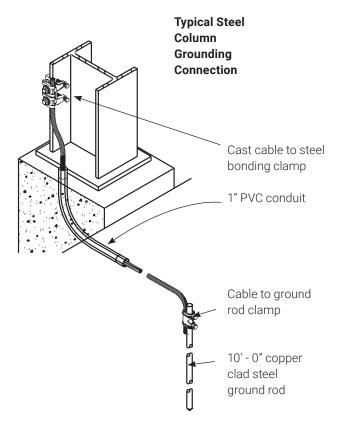


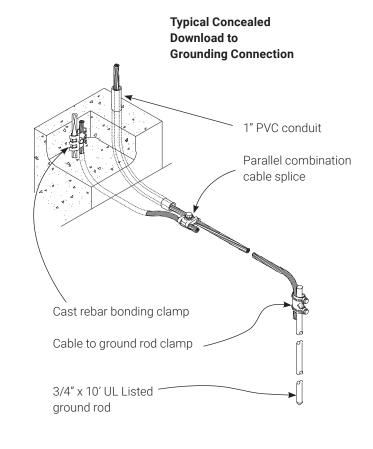



Typical Installation Drawings

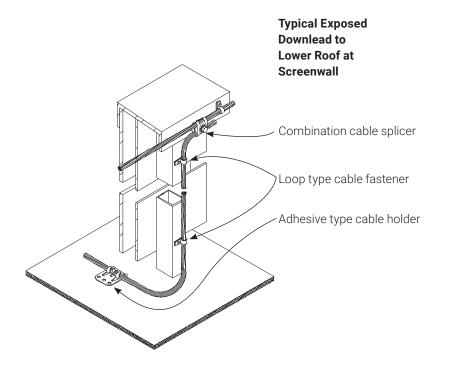

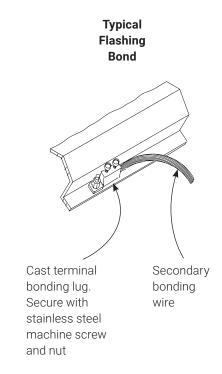

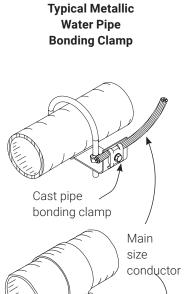


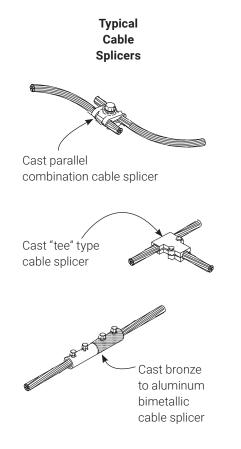

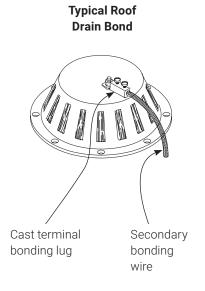

Adjustable pipe

bonding strap

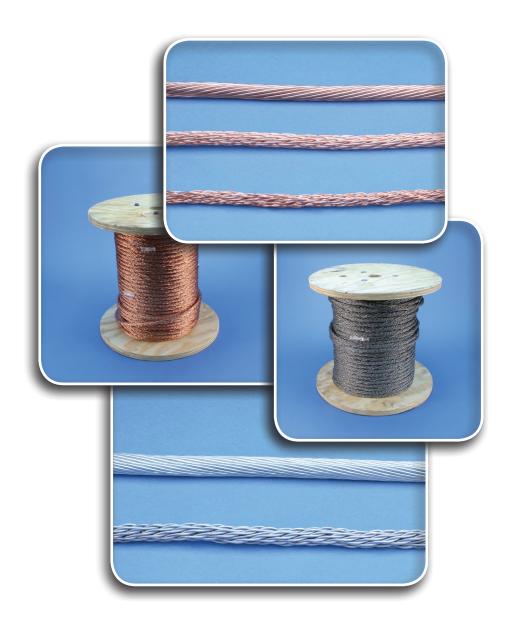



Lightning Protection Conductors

Lightning protection conductors are designed to handle the high current, short duration electrical current flows of a lightning strike. nVent ERICO conductors are offered with aluminum, copper and tinned copper stranding. They are designed based on material composition and dimensional requirements defined in standards such as UL®96 and NFPA®780. Standard spool lengths are defined below. Cut to order (CTO) lengths are available for an additional charge. Secondary conductors are designed for bonding of metal objects such as gutters and window frames.

Additional conductors designed for heavy-duty stack applications are available on page 28. nVent also offers insulated conductors, for non-UL applications where separation distance and flashover are a concern.

Primary Aluminum Conductors






| | | | | | | | | | Reel Size Options | |
|-------------|----------------|-----------------|-------------------------|-------------------------------|--------------------------|------------------|---------------------------------|------|-------------------|-----|
| Part No. | Conductor Type | # of Strands | Wire Size Gauge (in) | Weight per 1000 ft. (lbs). | Approx. Diameter (in) | Circular Mils | Meets or Exceeds Requirement | 250′ | 500′ | сто |
| LPA100 | Smooth Weave | 24 | .064 | 102 | .48 | 98,640 | Class I | Χ | Χ | Χ |
| LPA101 | Smooth Weave | 26 | .064 | 109 | .52 | 106,680 | Class I | - | Χ | Χ |
| LPA102 | Smooth Weave | 28 | .064 | 115 | .55 | 115,080 | Class I | - | Χ | Χ |
| LPA105 | Concentric | 37 | .076 | 204 | .55 | 211,000 | Class II | Χ | Χ | Χ |



Primary Copper Conductors

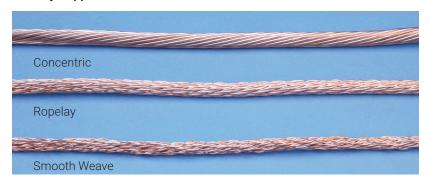



| | | | | | | | | Reel Size Optio | | tions |
|----------|-------------------------|-----------------|---------------------|-------------------------------|--------------------------|------------------|---------------------------------|-----------------|------|-------|
| Part No. | Stranding | # of Strands | Strand Size (in) | Weight per 1000 ft. (lbs). | Approx. Diameter (in) | Circular Mils | Meets or Exceeds Requirement | 250′ | 500' | сто |
| LPC120 | Smooth Weave | 29 | .045 | 192 | .44 | 59,450 | CLASSI | Χ | Χ | X |
| LPC120L | Tinned Smooth Weave | 29 | .045 | 192 | .44 | 59,450 | CLASSI | Χ | Χ | Χ |
| LPC122 | Smooth Weave | 32 | .045 | 220 | .48 | 65,600 | CLASSI | Χ | Χ | Χ |
| LPC122L | Tinned Smooth Weave | 32 | .045 | 220 | .48 | 65,600 | CLASSI | Χ | Χ | Χ |
| LPC123 | Smooth Weave | 36 | .045 | 240 | .50 | 73,800 | CLASSI | Χ | Χ | Χ |
| LPC124 | Smooth Weave | 40 | .045 | 270 | .53 | 82,000 | CLASSI | Χ | Χ | Χ |
| LPC124L | Tinned Smooth Weave | 40 | .045 | 270 | .53 | 82,000 | CLASSI | - | Χ | Χ |
| LPC128 | Smooth Weave | 24 | .064 | 340 | .55 | 98,640 | CLASSI | Χ | Χ | Χ |
| LPC125 | Ropelay | 24 | .064 | 340 | .45 | 98,640 | CLASSI | Χ | - | Χ |
| LPC126R | Ropelay | 28 | .064 | 380 | .47 | 115,080 | CLASSII | Χ | Χ | Χ |
| LPC126RL | Tinned Ropelay | 28 | .064 | 380 | .47 | 115,080 | CLASSII | Χ | Χ | Χ |
| LPC127 | Ropelay | 32 | .064 | 440 | .53 | 131,520 | CLASSII | Χ | Χ | Χ |
| LPC127L | Tinned Ropelay | 32 | .064 | 440 | .53 | 131,520 | CLASSII | Χ | - | Χ |
| LPC136 | Concentric (3/0) | 37 | .068 | 520 | .60 | 167,800 | CLASSII | - | Χ | Χ |
| LPC137 | Concentric (4/0) | 37 | .076 | 653 | .65 | 211,600 | CLASSII | Χ | - | Χ |
| LPC137L | Tinned Concentric (4/0) | 37 | .076 | 653 | .65 | 211,600 | CLASSII | Χ | - | Χ |

Secondary Aluminum Conductors





| | | | | | | | Reel | Size Op | tions |
|----------|----------------|--------------|------------------|-------------------------------|-----------------------|---------------|------|---------|-------|
| Part No. | Conductor Type | # of Strands | Strand Size (in) | Weight per 1000 ft. (lbs). | Approx. Diameter (in) | Circular Mils | 250′ | 500′ | сто |
| LPA140 | Smooth Weave | 10 | .064 | 40 | .35 | 41,100 | - | Χ | Χ |
| LPA141 | Soft Solid | 1 | .24 | 40 | .24 | 41,740 | Χ | Χ | Χ |

Secondary Copper Conductors





| | | | | | | | Reel | Size Op | otions |
|----------|-------------------|--------------|------------------|-------------------------------|-----------------------|---------------|------|---------|--------|
| Part No. | Conductor Type | # of Strands | Strand Size (in) | Weight per 1000 ft. (lbs). | Approx. Diameter (in) | Circular Mils | 250′ | 500' | сто |
| LPC150 | Smooth Weave | 14 | .045 | 92 | .25 | 28,700 | - | Χ | Χ |
| LPC151 | Soft Solid | 1 | .162 | 80 | .16 | 26,240 | - | - | Χ |
| LPC154 | Soft Solid | 1 | .325 | 204 | .33 | 66,360 | - | - | Χ |
| LPC154L | Tinned Soft Solid | 1 | .325 | 204 | .33 | 66,360 | - | - | Χ |

| Common Conductor Sizes | Circular Mils |
|---------------------------|------------------|
| #2 AWG | 66,400 |
| 1/0 | 105,500 |
| 2/0 | 133,000 |
| 3/0 | 167,800 |
| 4/0 | 211,600 |
| 50 mm ² | 98,676 |
| 70 mm ² | 138,147 |

| Common Strand Sizes | Diameter (in) |
|------------------------|------------------|
| #17 | 0.045 |
| #14 | 0.064 |








Air Terminals & Accessories

Air terminals, also known as strike termination devices, are offered in a range of base materials and surface platings. Terminals are provided with UNC threading to facilitate a minimum of 5 full threads of engagement. A full range of code compliant terminals are offered as well as copper-bonded steel air terminals for special applications. Additional air terminals are available in the heavy duty stack section on pages 28-29.

nVent ERICO copper-bonded steel air terminals are designed to be installed directly to structural steel in locations such as communication towers. A 4-1/2" threaded end with hardware is used to secure the terminal to a horizontal location where a continuous structure provides the path to ground. These terminals are not listed for use in UL applications. nVent can manufacture any length or style air terminal up to 144" under part number LPPOINTCTO. Special pricing will apply.

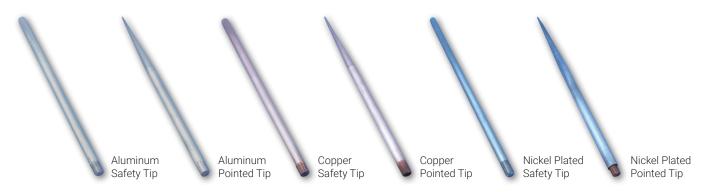

3/8" Points

| | Copper (Class I) | | | | | | | | | | | | |
|----------------|-----------------------------|-----------------|--------------------------------|--------------------|----------------------|--|--|--|--|--|--|--|--|
| Length (in) | Nickel Plated Pointed | Bare Pointed | Nickel Plated Safety Tip | Bare Safety Tip | Tinned Safety Tip | | | | | | | | |
| 10 | - | LPC201B | - | LPC201BST | - | | | | | | | | |
| 12 | LPC202 | LPC202B | LPC202ST | LPC202BST | LPC202LST | | | | | | | | |
| 15 | LPC203 | LPC203B | LPC203ST | LPC203BST | LPC203LST | | | | | | | | |
| 18 | LPC204 | LPC204B | LPC204ST | LPC204BST | LPC204LST | | | | | | | | |
| 24 | LPC205 | LPC205B | LPC205ST | LPC205BST | LPC205LST | | | | | | | | |
| 30 | LPC206 | LPC206B | LPC206ST | LPC206BST | LPC206LST | | | | | | | | |
| 36 | LPC207 | LPC207B | LPC207ST | LPC207BST | LPC207LST | | | | | | | | |
| 48 | LPC208 | LPC208B | LPC208ST | LPC208BST | LPC208LST | | | | | | | | |

5/8" Points

| Aluminu | m (Class II) | | Copper (Class II) | | | | | |
|---------|--------------|----------------|-----------------------------|-----------------|--------------------------------|--------------------|----------------------|--|
| Pointed | Safety Tip | Length (in) | Nickel Plated Pointed | Bare Pointed | Nickel Plated Safety Tip | Bare Safety Tip | Tinned Safety Tip | |
| LPA241 | LPA241ST | 10 | - | LPC241B | - | LPC241BST | - | |
| LPA242 | LPA242ST | 12 | LPC242 | LPC242B | LPC242ST | LPC242BST | LPC242LST | |
| LPA243 | LPA243ST | 15 | LPC243 | LPC243B | LPC243ST | LPC243BST | LPC243LST | |
| LPA244 | LPA244ST | 18 | LPC244 | LPC244B | LPC244ST | LPC244BST | LPC244LST | |
| LPA245 | LPA245ST | 24 | LPC245 | LPC245B | LPC245ST | LPC245BST | LPC245LST | |
| LPA246 | LPA246ST | 30 | LPC246 | LPC246B | LPC246ST | LPC246BST | LPC246LST | |
| LPA247 | LPA247ST | 36 | LPC247 | LPC247B | LPC247ST | LPC247BST | LPC247LST | |
| LPA248 | LPA248ST | 48 | LPC248 | LPC248B | LPC248ST | LPC248BST | LPC248LST | |

1/2" Points

| Aluminu | ım (Class I) | | | | Copper (Cla | ass II) | | |
|---------|--------------|----------------|-----------------------------|-----------------|--------------------------------|--------------------|----------------------|--|
| Pointed | Safety Tip | Length (in) | Nickel Plated Pointed | Bare Pointed | Nickel Plated Safety Tip | Bare Safety Tip | Tinned Safety Tip | |
| LPA221 | LPA221ST | 10 | - | LPC221B | - | LPC221BST | - | |
| LPA222 | LPA222ST | 12 | LPC222 | LPC222B | LPC222ST | LPC222BST | LPC222LST | |
| LPA223 | LPA223ST | 15 | LPC223 | LPC223B | LPC223ST | LPC223BST | LPC223LST | |
| LPA224 | LPA224ST | 18 | LPC224 | LPC224B | LPC224ST | LPC224BST | LPC224LST | |
| LPA225 | LPA225ST | 24 | LPC225 | LPC225B | LPC225ST | LPC225BST | LPC225LST | |
| LPA226 | LPA226ST | 30 | LPC226 | LPC226B | LPC226ST | LPC226BST | LPC226LST | |
| LPA227 | LPA227ST | 36 | LPC227 | LPC227B | LPC227ST | LPC227BST | LPC227LST | |
| LPA228 | LPA228ST | 48 | LPC228 | LPC228B | LPC228ST | LPC228BST | LPC228LST | |

16 mm (5/8") Points

| | Aluminum | Copper |
|--------------|------------|-----------------|
| Length | Safety Tip | Bare Safety Tip |
| .5 M (19.7") | LPA244MST | LPC244MBST |
| 1 M (39.4") | LPA247MST | LPC247MBST |

MST/MBST points are manufactured to the length typically specified in IEC installations, yet have the UNC threading for use with bases included within this catalog. Points are provided with lock washer for additional securing to the air terminal base.

Tubular Points



Tubular points are suitable for class 1 installations. They can be installed in either a 5/8" air terminal base (NC threads) or directly attached to a structure such as an air conditioning unit (3 in² contact pad). Additional lengths available on request.

| | Aluminum | | Copper | |
|----------------|----------------------------------|---------------|----------------------------------|---------------|
| Length (in) | 3 in ² Contact Pad | NC Threads | 3 in ² Contact Pad | NC Threads |
| 12 | LPA252 | LPA262 | LPC252 | LPC262 |
| 18 | LPA254 | LPA264 | LPC254 | LPC264 |
| 24 | LPA255 | LPA265 | LPC255 | LPC265 |

Extension Rods



Extension rods are provided with both ends NC threaded. Pieces are cut to order (CTO) in lengths up to 144".

| Diameter (in) | Aluminum | Copper | Stainless |
|---------------|-----------|-----------|-----------|
| 3/8 | - | LPC271CTO | - |
| 1/2 | LPA272CTO | LPC272CTO | LPS272CTO |
| 5/8 | LPA273CTO | LPC273CTO | LPS273CTO |

Standard N.C. thread each end CTO - Length "Cut to Order"

Spring Point Adaptor



Spring point adapters are designed to provide a flexible attachment point for air terminals. The adapters can be used on points from 10" to 24" in length.


| Aluminum | | Copper | |
|----------|----------|----------|----------|
| 1/2" | 5/8" | 1/2" | 5/8" |
| LPA27512 | LPA27558 | LPC27512 | LPC27558 |



Adjustable (Swivel) Point Adaptors



Part Number Coding

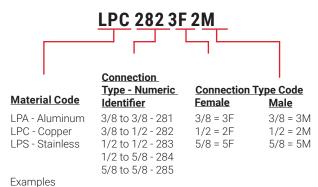


LPA2845F2M: Aluminum swivel, 5/8" female to 1/2" male LPC2823F2M: Copper swivel, 3/8" female to 1/2" male

Couplings & Adaptors



Part Number Coding

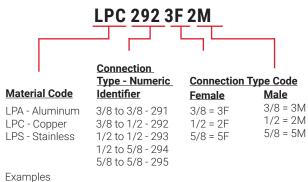

LPA2945F2M: Aluminum coupler, 5/8" female to 1/2" male LPC2913F3M: Copper coupler, 3/8" female to 3/8" male

Extendable Right-Angle Adaptor



Extendable adapter provides an additional 2" offset when used with air terminal bases. Can be coupled with LPx291 - LPx295 series to provide a total of 3" offset.

| Thread Size (in) | Aluminum | Copper |
|------------------|----------|----------|
| 3/8 | - | LPC29638 |
| 1/2 | LPA29612 | LPC29612 |
| 5/8 | LPA29658 | LPC29658 |

Safety Ball Air Terminal



Safety ball attachments are designed to provide a level of protection against impalement in high traffic areas. They are designed to be installed with the dual threaded extension rods.

| Thread Size (in) | Aluminum | Copper |
|------------------|----------|----------|
| 3/8 | - | LPC27838 |
| 1/2 | LPA27812 | LPC27812 |
| 5/8 | LPA27858 | LPC27858 |


Copper-Bonded Air Terminals



Copper-bonded steel air terminals for use in non-UL® applications such as tower lightning protection. Designed to be installed directly to structural steel and provided with mounting hardware.

| Part No. | Diameter (in) | Length (in) |
|-------------|---------------|-------------|
| LPCC584NC4 | 5/8 | 48 |
| LPCC585NC4 | 5/8 | 60 |
| LPCC586NC4 | 5/8 | 72 |
| LPCC588NC4 | 5/8 | 96 |
| LPCC5810NC4 | 5/8 | 120 |
| LPCC346NC4 | 3/4 | 72 |
| LPCC348NC4 | 3/4 | 96 |
| LPCC3410NC4 | 3/4 | 120 |



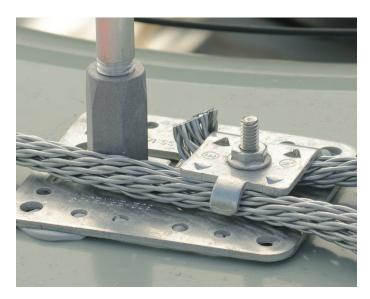

Air Terminal Bases & Braces

nVent offers a comprehensive line of stamped and cast air terminal bases to address a variety of installation application needs. All bases have a cable range starting from the smallest class 1 conductor to the largest class 2 conductor (see pages 14-16 for a dimensional cross reference). Additional air terminal bases specifically addressing heavy-duty stack installations are included in the industrial stack equipment section.

Universal Air Terminal Base



| Point Dia. (in) | Aluminum | Copper | Tinned Copper |
|--------------------|----------|----------|---------------|
| 3/8 | - | LPC30238 | LPC302L38 |
| 1/2 | LPA30212 | LPC30212 | LPC302L12 |
| 5/8 | LPA30258 | LPC30258 | LPC302L58 |

- Field adjusting tool (part number LPT302)
- Also available pre-configured for vertical applications (eg. LPA30212V, aluminum 1/2" point, factory set for vertical applications)

Horizontal Air Terminal Base



Bronze or aluminum stamped adhesive base for use on narrow flat surfaces. Positive single bolt tension for multi-directional cable clamping. Four.200" diameter mounting holes for bolts or screws.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC30438 |
| 1/2 | LPA30412 | LPC30412 |
| 5/8 | LPA30458 | LPC30458 |

Vertical/Horizontal Air Terminal Base



Bronze or aluminum cast adhesive point base for use on flat or vertical surfaces. Positive single bolt tension for multidirectional cable clamping. Four.250" diameter mounting holes for bolts or screws.

| Point Dia. (in) | Aluminum | Copper | Tinned Copper |
|-------------------------|-----------|-----------|---------------|
| 3/8 | - | LPC30538 | LPC305L38 |
| 1/2 | LPA30512 | LPC30512 | LPC305L12 |
| 5/8 Horizontal Mount | LPA30558H | LPC30558H | LPC305L58H |
| 5/8 Vertical Mount | LPA30558V | LPC30558V | LPC305L58V |

Also available with a completely through vertical threaded air terminal hole (eg. LPA30512THRU)

Horizontal Mount Point Base



Bronze or aluminum cast adhesive point base for use on flat surfaces when no penetration may be made for anchoring. Positive single bolt tension cable clamping. For use with hot pitch, roofing compound or commercial adhesive on built-up roof surfaces or other locations.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC30938 |
| 1/2 | LPA30912 | LPC30912 |
| 5/8 | LPA30958 | LPC30958 |

Vertical Mount Point Base



Bronze or aluminum cast point base for use on vertical surface with horizontal or vertical run of cable. Positive bolt tension cable clamping with two.281" diameter mounting holes for bolts or screws.

| Point Dia. (in) | Aluminum | Copper | Tinned Copper |
|-----------------|----------|----------|---------------|
| 3/8 | - | LPC31838 | PC318L38 |
| 1/2 | LPA31812 | LPC31812 | PC318L12 |
| 5/8 | LPA31858 | LPC31858 | PC318L58 |

Ridge/Sloping Roof Point Base



Copper or aluminum point base for use on ridged roofs. Positive bolt tension cable clamping. 12" long base with four.200" diameter holes provided for mounting.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC31238 |
| 1/2 | LPA31212 | LPC31212 |
| 5/8 | LPA31258 | LPC31258 |

Ridge/Sloping Roof Point Base



Copper or aluminum point base for use on narrow surface or roof edge. 8" long base with four.200" diameter holes for nails or screw anchors.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC31538 |
| 1/2 | LPA31512 | LPC31512 |
| 5/8 | LPA31558 | LPC31558 |



Offset Vertical Mount Point Base



Bronze or aluminum cast point base for use on vertical surface with horizontal or vertical run of cable. Point attachment offset 2" from surface to clear overhang of wall cap or cover. Positive bolt tension cable clamping with two.281" diameter mounting holes for bolts or screws.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC31938 |
| 1/2 | LPA31912 | LPC31912 |
| 5/8 | LPA31958 | LPC31958 |

Inline Point Base



Bronze or aluminum straight inline point base of hexagonal metal stock. Two 5/16" set screws anchor cable within base.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC32138 |
| 1/2 | LPA32112 | LPC32112 |
| 5/8 | LPA32158 | LPC32158 |

Pipe Mount Point Base & Cable Clamp Support



Bronze or aluminum cast pipe mount point for vertical pipe or cable pipe bond. When used as a point support it may be used with or without cable run on pipe or will allow point to stand off pipe to use type 321 point to cable connector. Maximum mounting diameter of 1.75".

| Part Number | Material | Nominal Pipe Diameter Range (in) |
|-------------|---------------|-------------------------------------|
| LPA330 | Aluminum | .75 - 1.75 |
| LPC330 | Copper | .75 - 1.75 |
| LPC330L | Tinned Copper | .75 - 1.75 |
| LPA331 | Aluminum | 1.50 - 2.00 |
| LPC331 | Copper | 1.50 - 2.00 |
| LPC331L | Tinned Copper | 1.50 - 2.00 |

See page 26 for pipe size reference chart.

Cone Roof Point Base



Bronze or aluminum cast point base for use on cone shaped metal surface. No cable connector. Use three bolts or screws for anchoring.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC33938 |
| 1/2 | LPA33912 | LPC33912 |
| 5/8 | LPA33958 | LPC33958 |

Horizontal Bond Point Base



Bronze or aluminum cast point base for mounting directly to horizontal structural steel surface. Eight square inches of surface contact with four.20" diameter holes and two.25" holes provided for bolts or metal screws.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC34038 |
| 1/2 | LPA34012 | LPC34012 |
| 5/8 | LPA34058 | LPC34058 |

Ridge Mount Point Base



Bronze or aluminum cast point base for use on ridged roof, sloping or flat surfaces. May be easily formed. Positive bolt tension cable clamping with four.250" diameter holes provided for nails or metal screws.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC34538 |
| 1/2 | LPA34512 | LPC34512 |
| 5/8 | LPA34558 | LPC34558 |

Also available with a completely through vertical threaded air terminal hole for through ridge applications (eg. LPA34512THRU)

Sloped Roof Point Base



Bronze or aluminum cast point base for use on ridged roof, sloping or flat surfaces. Positive bolt tension cable clamping with four.187" diameter holes provided for nails or metal screws.

| Point Dia. (in) | Aluminum | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC34738 |
| 1/2 | LPA34712 | LPC34712 |
| 5/8 | LPA34758 | LPC34758 |

Standing Seam Point Base



Bronze or aluminum machined point base for standing seam roofing systems. Bottom groove 1/2" wide by 3/4" deep to secure on seam with two set screws. Adjustable cable connector for conductor runs either parallel or perpendicular to the seam.

| Point Dia. (in) | | Copper |
|-----------------|----------|----------|
| 3/8 | - | LPC34838 |
| 1/2 | LPA34812 | LPC34812 |
| 5/8 | LPA34858 | LPC34858 |

Pipe Mount Point Base



Bronze or aluminum cast pipe mount point base with point coupling for horizontal pipe. Provided with cable clamp to support cable beneath pipe. Can be applied to vertical pipe with LP296 right angle point coupler. Maximum mounting diameter of 2.50".

| Point Dia. (in) | Aluminum | Copper | Tinned Copper |
|-----------------|----------|----------|---------------|
| 3/8 | - | LPC37138 | LPC371L38 |
| 1/2 | LPA37112 | LPC37112 | LPC371L12 |
| 5/8 | LPA37158 | LPC37158 | LPC371L58 |

See page 26 for pipe size reference chart.



Penetrating Base



Non-Penetrating Base



Galvanized steel tripod braces for additional support of long air terminals. Constructed of 1/4" mild steel with heavy section washer guides. All joints welded prior to galvanizing. Two.14" diameter mounting holes per leg furnished for installation. Suitable for 3/8", 1/2" and 5/8" diameter points.

Galvanized steel tripod braces for additional support of long air terminals on flat or gently sloping surface when no penetration may be made for anchoring. Constructed of 1/4" mild steel with heavy section washer guides. All joints welded prior to galvanizing. For use with hot pitch, roofing compound or commercial adhesive on membrane surface or other locations. Suitable for 3/8", 1/2" and 5/8" diameter points.

| Penetrating Support | Non-penetrating Support | Length (in) | Maximum Air Terminal Dimensions (in) |
|------------------------|----------------------------|----------------|---|
| LPG35058 | LPG36058 | 14 | 5/8 X 24 |
| LPG35158 | LPG36158 | 18 | 5/8 X 30 |
| LPG35258 | LPG36258 | 24 | 5/8 X 40 |
| LPG35358 | LPG36358 | 36 | 5/8 X 60 |
| LPG35458 | LPG36458 | 48 | 5/8 X 84 |

PIPE MOUNT POINT BASE



Bronze or aluminum cast pipe mount point base with point coupling for horizontal pipe. Can be applied to vertical pipe with LP296 right angle point coupler. Mounts on pipe diameters from 1.50" to 2.50".

| Point Dia. (in) | Aluminum | Copper | Tinned Copper |
|--------------------|----------|----------|------------------|
| 3/8 | - | LPC37238 | LPC372L38 |
| 1/2 | LPA37212 | LPC37212 | LPC372L12 |
| 5/8 | LPA37258 | LPC37258 | LPC372L58 |

STRAP TYPE POINT OR CABLE HOLDER



Copper or aluminum strap type point or cable holder. Made of heavy tinned copper or bare aluminum strap formed to draw tight under bolt tension. Will hold solid rod points or full size cables offset from flat or curved mounting surface. Available in various offset distances.

Series 669



Series 670

| Part No. | Material | Offset Distance (in) | Attachment Wing Length (in) |
|-------------|---------------|----------------------------|--------------------------------|
| LPA669 | Aluminum | 4 | 2 |
| LPC669 | Tinned Copper | 4 | 2 |
| LPA670 | Aluminum | 1 | 6 |
| LPC670 | Tinned Copper | 1 | 6 |

STRAP TYPE POINT OR CABLE TO PIPE HOLDER



Copper or aluminum strap type point or cable to pipe holder. Made of heavy tinned copper or bare aluminum strap formed to draw tight under bolt tension to hold solid rod points or full size cables close to pipe. Available in standard pipe sizes 1-1/2", 2", 3" and 4". Other sizes available upon request.

Series 671-674

| Pipe Size (in) | Aluminum | Copper |
|---------------------------|----------|--------|
| 1-1/2 inside (1.900 O.D.) | LPA671 | LPC671 |
| 2 inside (2.375 O.D.) | LPA672 | LPC672 |
| 3 inside (3.500 O.D.) | LPA673 | LPC673 |
| 4 inside (4.500 O.D.) | LPA674 | LPC674 |




Series 675-678

| Pipe Size (in) | Aluminum | Copper |
|---------------------------|----------|--------|
| 1-1/2 inside (1.900 O.D.) | LPA675 | LPC675 |
| 2 inside (2.375 O.D.) | LPA676 | LPC676 |
| 3 inside (3.500 O.D.) | LPA677 | LPC677 |
| 4 inside (4.500 O.D.) | LPA678 | LPC678 |

Pipe Reference Chart

| NPS (in) | Outer Diameter (in) |
|----------|---------------------|
| 3/8 | .675 |
| 1/2 | .840 |
| 3/4 | 1.050 |
| 1 | 1.315 |
| 1-1/4 | 1.660 |
| 1-1/2 | 1.900 |
| 2 | 2.375 |
| 2-1/2 | 2.875 |
| 3 | 3.500 |
| 3-1/2 | 4.000 |
| 4 | 4.500 |
| 5 | 5.563 |
| 6 | 6.625 |
| 8 | 8.625 |
| 10 | 10.750 |
| 12 | 12.750 |

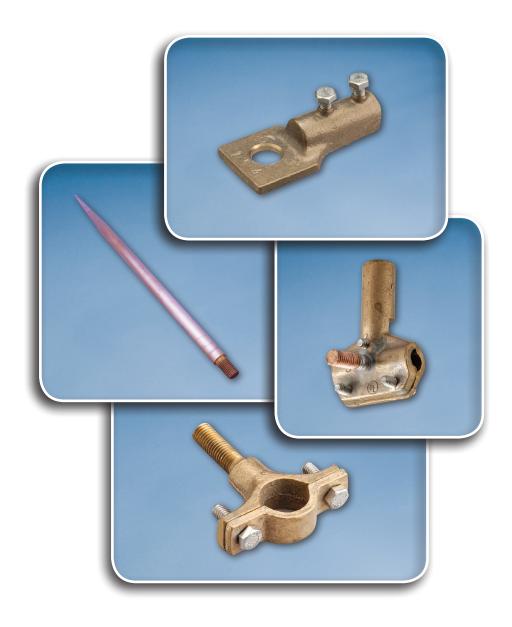



HEAVY-DUTY STACK EQUIPMENT

Lightning protection components for heavy-duty stacks, as defined by UL96, require a minimum of class II materials. All air terminals 5/8" & 3/4" are produced with a 5/8" thread for compatibility with the air terminal bases. All lead covered conductors, air terminals and components denoted by "LPLC" have a 1/16" thick covering of lead.

LEAD COVERED & COPPER CONDUCTORS



Copper Conductors

| Part No. | | # of Strands | Wire Size (in) | Weight per 1000 ft. (lbs). | | Meets or Exceeds Requirements |
|-------------|------------|-----------------|-------------------|----------------------------------|---------|-------------------------------------|
| LPC401CTO | Ropelay | 28 | .064 | 380 | 115,080 | Class II |
| LPC404CTO | Concentric | 19 | .106 | 653 | 211,600 | Class II-4/0 |

Lead Covered Copper Conductors

| Part No. | Stranding | | | Weight per 1000 ft. (lbs). | | Meets or Exceeds Requirements |
|-------------|------------|----|------|----------------------------------|---------|-------------------------------------|
| LPLC401CTO | Concentric | 19 | .084 | 1,380 | 115,080 | Class II |
| LPLC404CTO | Concentric | 19 | .106 | 1,983 | 211,600 | Class II-4/0 |

BARE COPPER AIR TERMINALS



Solid copper air terminals made from high conductivity copper rod with tapered point and standard UNC threads.

5/8" Air Terminals (5/8" thread)

| Length (in) | Copper |
|----------------|--------|
| 60 | LPC415 |
| 72 | LPC416 |
| 84 | LPC417 |
| 96 | LPC418 |

For shorter length see page 18.

3/4" Air Terminals (5/8" thread)

| Length (in) | Copper |
|----------------|--------|
| 18 | LPC421 |
| 24 | LPC422 |
| 36 | LPC423 |
| 48 | LPC424 |
| 60 | LPC425 |
| 72 | LPC426 |
| 84 | LPC427 |
| 96 | LPC428 |



LEAD COVERED AIR TERMINALS



Solid copper air terminals made from high conductivity copper rod with a 1/16" thick lead sheath, tapered point and standard UNC threads.

5/8" Air Terminals (5/8" thread)

| Length (in) | Lead-Covered |
|----------------|--------------|
| 18 | LPLC411 |
| 24 | LPLC412 |
| 36 | LPLC413 |
| 48 | LPLC414 |
| 60 | LPLC415 |
| 72 | LPLC416 |
| 84 | LPLC417 |
| 96 | LPLC418 |

3/4" Air Terminals (5/8" thread)

| (-, , | |
|-------------|--------------|
| Length (in) | Lead-Covered |
| 18 | LPLC421 |
| 24 | LPLC422 |
| 36 | LPLC423 |
| 48 | LPLC424 |
| 60 | LPLC425 |
| 72 | LPLC426 |
| 84 | LPLC427 |
| 96 | LPLC428 |

STAINLESS STEEL AIR TERMINALS



Stainless steel air terminals made from 304 grade stainless steel rod, with tapered point and standard UNC threads.

5/8" Air Terminals (5/8" thread)

| Length (in) | Stainless Steel | |
|-------------|--------------------|--|
| 18 | LPS411 | |
| 24 | LPS412 | |
| 36 | LPS413 | |
| 48 | LPS414 | |
| 60 | LPS415 | |
| 72 | LPS416 | |
| 84 | LPS417 | |
| 96 | LPS418 | |

3/4" Air Terminals (5/8" thread)

| Length (in) | Stainless Steel |
|----------------|--------------------|
| 18 | LPS421 |
| 24 | LPS422 |
| 36 | LPS423 |
| 48 | LPS424 |
| 60 | LPS425 |
| 72 | LPS426 |
| 84 | LPS427 |
| 96 | LPS428 |

AIR TERMINAL BASES











Current standard requirements specify that side mounted points be anchored at two locations to the structure with the above provided stud counting as one. See page 56 for drop-in anchors for use with the studs. Refer to 480 or 492 series for point holders to be used as the second required anchor.

| Part No. | Material | Stud Length (in) |
|-----------|-------------------|------------------|
| LPC431 | Brass | - |
| LPLC431 | Lead Coated Brass | - |
| LPC433 | Brass | - |
| LPLC433 | Lead Coated Brass | - |
| LPC435SH | Brass | 7/8 |
| LPC435LG | Brass | 1-1/2 |
| LPLC435SH | Lead Coated Brass | 7/8 |
| LPLC435LG | Lead Coated Brass | 1-1/2 |
| LPC436SH | Brass | 7/8 |
| LPC436LG | Brass | 1-1/2 |
| LPLC436SH | Lead Coated Brass | 7/8 |
| LPLC436LG | Lead Coated Brass | 1-1/2 |
| LPC437SH | Brass | 7/8 |
| LPC437LG | Brass | 1-1/2 |
| LPLC437SH | Lead Coated Brass | 7/8 |
| LPLC437LG | Lead Coated Brass | 1-1/2 |

CABLE SPLICERS



| Material |
|----------------------|
| Brass |
| Lead Coated Brass |
| |

Suitable for cables from 2/0 to 4/0 in size

BONDING FITTINGS




| Part No. | Material | Contact Area (in²) | Hole Size (in) | Use with Cable # |
|-------------|----------------------|-----------------------|-------------------|------------------|
| LPC451 | Brass | 3 | 13/16 | LPC401/LPC404 |
| LPLC451 | Lead Coated Brass | 3 | 13/16 | LPLC401/LPLC404 |
| LPS451 | Stainless Steel | 3 | 13/16 | LPC401/LPC404 |

HANDRAIL TO POINT



| Part No. | Material | Pipe Diameter (in) | Air Terminal Size (in) |
|-------------|-----------------|--------------------|---------------------------|
| LPC456 | Brass | 1.0 - 2.0 | 5/8 & 3/4 |
| LPS456 | Stainless Steel | 1.0 - 2.0 | 5/8 & 3/4 |

SPECIAL BONDING ACCESSORIES

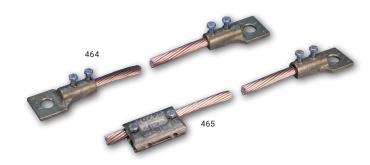

| Part No. | Lug 1 | Lug 2 | Connector | Material |
|-------------|---------|---------|-----------|-------------------|
| LPC464 | LPC451 | LPC451 | - | Brass |
| LPLC464 | LPLC451 | LPLC451 | - | Lead Coated Brass |
| LPC465 | LPC451 | - | LPC441 | Brass |
| LPLC465 | LPLC451 | - | LPLC441 | Lead Coated Brass |

Standard cable length = 36" Standard cable = LPC401

For 4/0 cable size insert "40" following 464 in the part number. (eg. LPC46440 for copper lug, 4/0 cable size)

BONDING CLAMPS (LPC466)



Cast bronze universal cable to rebar bonding clamp. Fits cable sizes through 250 MCM to reinforcing bars up through #9 (1.128").

REBAR BONDS



Embedded rebar connection assembly consists of a flush mount brass plate with 1/2" tapped hole connecting Part No. LPC401 or LPC404 bare copper cable to rebar bonding clamp(s). Three feet of cable provided per rebar clamp. Use this product in conjunction with Part No. LPC468, exposed downlead to flush plate connectors.

| Part No. | Rebar Clamp 1 | Rebar Clamp 2 | Conductor 1 |
|-------------|------------------|------------------|-------------|
| LPC467 | - | - | - |
| LPC467X1 | LPC466 | - | LPC401 |
| LPC467X2 | LPC466 | LPC466 | LPC401 |
| LPC46740X1 | LPC466 | - | LPC404 |
| LPC46740X2 | LPC466 | LPC466 | LPC404 |

BARE BRASS CONNECTOR



Cast cable connector for connecting flush rebar plate to bare copper downlead cable. Available in cast bronze (LPC468) and lead covered (LPLC468).

PIPE FASTENERS (LPC478)



Bare bronze, protector pipe fastener. Provided with 1/2" diameter x 7/8" long threaded stud for anchoring.

STEEL YOKE (LPS469)



Stainless steel voke for connections to iron bands. For use where lead covered copper cables extend over bands. Drilled and tapped for 1/2" threaded stud. Use with Series LPC481, LPC482 or LPC483. Designed to fit over a single 3/8" thick band (LPS469).

POINT & CABLE FASTENERS



Bronze 2-bolt cap type point fastener for use with bare copper points. Provided with 1/2" threaded stud for anchoring.

| Part No. | Air Terminal Size (in) | Stud Length (in) | Material |
|-------------|---------------------------|---------------------|-------------------|
| LPC48058SH | 5/8 | 7/8 | Brass |
| LPC48058LG | 5/8 | 1-1/2 | Brass |
| LPC48034SH | 3/4 | 7/8 | Brass |
| LPC48034LG | 3/4 | 1-1/2 | Brass |
| LPLC48058SH | 5/8 | 7/8 | Lead Coated Brass |
| LPLC48058LG | 5/8 | 1-1/2 | Lead Coated Brass |
| LPLC48034SH | 3/4 | 7/8 | Lead Coated Brass |
| LPLC48034LG | 3/4 | 1-1/2 | Lead Coated Brass |

GROUNDING BUSBAR (LPC475)



LPC475 used as a ground bus to connect bottom end of downlead to customer provided ground tail at column base. Standard holes provided for 1/2" bolt size connections and anchors (three on the face and one on each wing).

PINCH TYPE CABLE FASTENERS



Pinch type cable fastener. Provided with 1/2" threaded stud for anchoring. For use with LPC401/LPLC404

DOWNLEAD PROTECTOR (LPC477)



Copper tube protector for use where stranded cables are subject to displacement or damage. Protectors are 8 feet long and ship with a set screw and wedge at each end to bond cable to tube.

| Part No. | Stud Length (in) | Material |
|-------------|---------------------|-------------------|
| LPC481SH | 7/8 | Brass |
| LPC481LG | 1-1/2 | Brass |
| LPLC481SH | 7/8 | Lead Coated Brass |
| LPLC481LG | 1-1/2 | Lead Coated Brass |

2-BOLT CABLE FASTENERS



2-bolt cap type cable fastener. Provided with 1/2" threaded stud for anchoring. For use with LPC401 thru LPLC404

| Part No. | Stud Length (in) | Material |
|-------------|---------------------|-------------------|
| LPC482SH | 7/8 | Brass |
| LPC482LG | 1-1/2 | Brass |
| LPLC482SH | 7/8 | Lead Coated Brass |
| LPLC482LG | 1-1/2 | Lead Coated Brass |

POINT & CABLE INSERTS



Lay-in point or cable holder. Series LPC492 for use with bare copper or stainless points. Series LPLC492 for use with lead covered steel points. Lay-in brick construction.

| Part No. | Material | Air Terminal Size (in) |
|-------------|---------------------|---------------------------|
| LPC49258 | Copper | 5/8 |
| LPC49234 | Copper | 3/4 |
| LPLC49258 | Lead Covered Copper | 5/8 |
| LPLC49234 | Lead Covered Copper | 3/4 |

CABLE TO METAL FASTENER (LPC483)



Bare bronze cable to metal surface fastener. Provided with 1/2" x 2" stainless steel mounting bolt. May be used with Part No. LPS469 iron band yoke.

CONCRETE INSERT (LPC48412)



Cast bronze insert; provided with 1/2"-13 internal thread for placement in concrete during construction. Use with standard length stud 7/8"

See page 56 for additional anchors



CABLE CONNECTORS

COPPER AND ALUMINUM COMPRESSION CABLE SPLICERS



Copper or aluminum connector with compression type fingers to crimp over cable. Made from 14 gauge copper or 10 gauge aluminum sheet stock. For use on Class I structures only.

| Part No. | Material | Conductor Range |
|----------|----------|------------------------|
| LPA501 | Aluminum | all class 1 conductors |
| LPC501 | Copper | all class 1 conductors |
| LPA503 | Aluminum | all class 1 conductors |
| LPC503 | Copper | all class 1 conductors |
| LPA505 | Aluminum | all class 1 conductors |
| LPC505 | Copper | all class 1 conductors |

BRONZE AND ALUMINUM UNIVERSAL PARALLEL CABLE SPLICERS



Stamped bronze or aluminum universal parallel cable connector. Positive single bolt tension grip on cables or wire. Total contact length 1-1/2"

| Part No. | Material | Conductor Range |
|----------|---|-----------------|
| LPA502 | Aluminum | Class 1 to 4/0 |
| LPC502 | Bronze | Class 1 to 4/0 |
| LPC502A | Aluminum / Bronze with stainless separation | Class 1 to 4/0 |
| LPC502L | Tinned Bronze | Class 1 to 4/0 |

ALUMINUM AND TINNED BRONZE SECONDARY CABLE CONNECTOR



Stamped aluminum or tinned bronze secondary cable connector. Can be used to bond sheet metal bodies such as gutters or fixed ladders. Conductor range varies by application.

| Part No. | Material |
|----------|---------------|
| LPA508 | Aluminum |
| LPC508L | Tinned Copper |

CAST BRONZE AND ALUMINUM TEE CABLE SPLICER



Cast bronze or aluminum tee cable connector with positive bolt tension grip on cables. For use with all full size cables.

| Part No. | Material | Conductor Range |
|----------|---------------|-----------------|
| LPA510 | Aluminum | Class 1 to 4/0 |
| LPC510 | Bronze | Class 1 to 4/0 |
| LPC510L | Tinned Bronze | Class 1 to 4/0 |

CAST BRONZE AND ALUMINUM STRAIGHT CABLE SPLICER



Machined bronze or aluminum cable connector. For use with all cable sizes. Straight cable splicer with 4 bolts for pressure on each cable.

| Part No. | Material | Conductor Range |
|----------|---------------|-----------------|
| LPA513 | Aluminum | Class 1 to 4/0 |
| LPC513 | Bronze | Class 1 to 4/0 |
| LPC513L | Tinned Bronze | Class 1 to 4/0 |



CAST BRONZE AND ALUMINUM UNIVERSAL **PARALLEL CABLE SPLICERS**



Cast bronze or aluminum universal parallel cable connector. Positive single or dual bolt tension grip on cables or wire. Total contact length 1-1/2"(516) or 2"(517).

| Part No. | Material | Conductor Range |
|----------|---|------------------|
| LPA516 | Aluminum | Secondary to 4/0 |
| LPC516 | Bronze | Secondary to 4/0 |
| LPC516A | Aluminum / Bronze with stainless separation | Secondary to 4/0 |
| LPA517 | Aluminum | Secondary to 4/0 |
| LPC517 | Bronze | Secondary to 4/0 |
| LPC517L | Tinned Bronze | Secondary to 4/0 |

CAST BRONZE AND ALUMINUM UNIVERSAL PARALLEL CABLE CONNECTORS



Cast bronze or aluminum universal parallel cable connector. Positive single or double bolt tension grip on cables or wires. Total contact length 2" (527) or 4" (528).

| Part No. | Material | Conductor Range |
|----------|----------|-----------------|
| LPA527 | Aluminum | Class 1 to 4/0 |
| LPC527 | Bronze | Class 1 to 4/0 |
| LPA528 | Aluminum | Class 1 to 4/0 |
| LPC528 | Bronze | Class 1 to 4/0 |

BONDING PLATES

Bonding plates are required to have a minimum of 3 square inches of contact area. 8 square inches are required when the structural steel is to be used as the primary down conductor for the lightning protection system. For crimp style connectors, fingers or tabs crimp over cable for direct contact. Crimp style bonding plates can only be used in class 1 locations. Mechanical style bonding connections can be used in both Class 1 & Class 2 applications. For standard crimp cable holders, see the 810 series on page 54.





| Part No. | Material | Connection Type | Construction | Contact Area (Square in.) |
|----------|---------------|--------------------|--------------|------------------------------|
| LPA533 | Aluminum | Crimp | Stamped | 8 |
| LPC533 | Copper | Crimp | Stamped | 8 |
| LPC533L | Tinned Copper | Crimp | Stamped | 8 |
| LPA535 | Aluminum | Crimp | Stamped | 4 |
| LPC535 | Copper | Crimp | Stamped | 4 |
| LPC535L | Tinned Copper | Crimp | Stamped | 4 |

The 536 series combines a cast bronze or aluminum flat metal bonding plate (Part Numbers LPC532 or LPA532) with mild steel welding plate 1/4" x 4" x 4" for attachment to steel columns or beams when no holes may be made in steel member. Steel plate to be welded to steel column or beam. The bonding plates are attached to the plate with four 1/2-20 hex head bolts.



| Part No. | Material | Connection Type | Construction |
|----------|---|-----------------|--------------|
| LPA532 | Aluminum | Mechanical | Cast |
| LPC532 | Copper | Mechanical | Cast |
| LPC532L | Tinned Copper | Mechanical | Cast |
| LPA536 | Aluminum | Mechanical | Cast |
| LPC536 | Copper | Mechanical | Cast |
| LPA537 | Aluminum | Mechanical | Cast |
| LPC537 | Copper | Mechanical | Cast |
| LPC537L | Tinned Copper | Mechanical | Cast |
| LPA540 | Aluminum | Mechanical | Stamped |
| LPC540 | Copper | Mechanical | Stamped |
| LPC540A | Aluminum / Bronze with stainless separation | Mechanical | Stamped |
| LPC540L | Tinned Copper | Mechanical | Stamped |

BONDING LUGS

CAST AND STAMPED BONDING LUGS



Cast or stamped bonding lugs that can be used with class 1 up to 4/0 cable. Various bolt hole sizes are available. 3 square inches provides the contact area for a main-sized bond.

| Bolt Diameter | | Part No | |
|---------------|---------------|-----------|-----------|
| (in) | Material | Cast | Stamped |
| 1/4 | Aluminum | - | LPA55314 |
| 1/4 | Copper | - | LPC55314 |
| 1/4 | Tinned Copper | - | LPC553L14 |
| 3/8 | Aluminum | LPA55138 | LPA55338 |
| 3/8 | Copper | LPC55138 | LPC55338 |
| 3/8 | Tinned Copper | LPC551L38 | LPC553L38 |
| 1/2 | Aluminum | LPA55112 | LPA55312 |
| 1/2 | Copper | LPC55112 | LPC55312 |
| 1/2 | Tinned Copper | LPC551L12 | LPC553L12 |

BEAM BONDING CLAMPS



| Part No. | Material |
|----------|---------------|
| LPA554 | Aluminum |
| LPC554 | Copper |
| LPC554L | Tinned Bronze |

Stamped bonding clamp for all main sized conductor to 5/8" beam thickness

CAST BRONZE AND ALUMINUM TERMINAL BONDING LUG



Cast bronze or aluminum terminal bonding lug with set screw pressure on cables and wires. Lug hole for 1/4" diameter bolt. For use with all secondary bonding cables and wires.

| Part No. | Material |
|----------|---------------|
| LPA555 | Aluminum |
| LPC555 | Bronze |
| LPC555L | Tinned Bronze |

BEAM/FLANGE BONDING CLAMPS

Beam/Purlin Flange Bonding Clamps

Cast bronze or aluminum universal cable to beam flange or purlin flange bonding clamp. Requires no holes in heavy steel member. For use with all full size cables and bonding cables and wires.



Provide 8 square inches of contact area. For use with up to 1" beam thickness.

| Part No. | Material |
|----------|---------------|
| LPA557 | Aluminum |
| LPC557 | Bronze |
| LPC557L | Tinned Bronze |





Single bolt tension on up to 5/8" beam thickness.

| Part No. | Material |
|----------|---------------|
| LPA559 | Aluminum |
| LPC559 | Bronze |
| LPC559L | Tinned Bronze |



| Part No. | Material |
|----------|---------------|
| LPA858 | Aluminum |
| LPC858 | Copper |
| LPC858L | Tinned Bronze |

Cast bronze or aluminum cable clamp for fastening to flat metal objects such as I-beams, angle irons, channel irons, etc. Positive bolt tension draws tight on steel member. For use with all full size cables, miniature cables and bonding wires.

Connectors, Clamps, Plates & Lugs

PIPE GROUNDING CLAMPS

Cast Grounding Clamp

For use with all full size cables. 570 Series recommended also for rebar bonding. See page 26 for a pipe size cross reference chart.



| Part No. | Material | Nominal Pipe Diameter Range (in) |
|----------|---------------|-------------------------------------|
| LPA570 | Aluminum | .50 - 1.50 |
| LPC570 | Copper | .50 - 1.50 |
| LPC570L | Tinned Copper | .50 - 1.50 |
| LPA571 | Aluminum | 2.00 - 2.70 |
| LPC571 | Copper | 2.00 - 2.70 |
| LPC571L | Tinned Copper | 2.00 - 2.70 |
| LPA580 | Aluminum | .75 - 1.32 |
| LPC580 | Copper | .75 - 1.32 |
| LPC580L | Tinned Copper | .75 - 1.32 |

STAMPED GROUNDING CLAMPS

Copper or aluminum pipe bonding clamp, made of stainless steel u-bolt with stainless strap and aluminum or copper cable connector. Suitable for pipe sizes from 1.5" to 6". Can be used with all cable sizes and incorporated with Series 321 for point mounting. For pipe sizes greater than 6" refer to Series 588 and 590.



| Part No. | Cable Connector Material | Nominal Pipe Diameter Range (in) |
|----------|-----------------------------|-------------------------------------|
| LPA5962 | Aluminum | 1.90 - 2.63 |
| LPC5962 | Copper | 1.90 - 2.63 |
| LPA5963 | Aluminum | 2.63 - 3.63 |
| LPC5963 | Copper | 2.63 - 3.63 |
| LPA5964 | Aluminum | 4.00 - 4.63 |
| LPC5964 | Copper | 4.00 - 4.63 |
| LPA5966 | Aluminum | 5.00 - 6.63 |
| LPC5966 | Copper | 5.00 - 6.63 |

See page 26 for pipe reference chart.




Connectors, Clamps, Plates & Lugs

STRAP GROUNDING CLAMP

Strap tinned copper or aluminum pipe bonding clamp. Suitable for pipe diameters from 6.63" to 8.63" (588 series) and from 8.63" to 10.75" (590 Series) Other sizes available upon request. For use with all full size cables.



| Part No. | Material |
|----------|---------------|
| LPA588 | Aluminum |
| LPC588 | Bronze |
| LPA590 | Aluminum |
| LPC590 | Tinned Bronze |

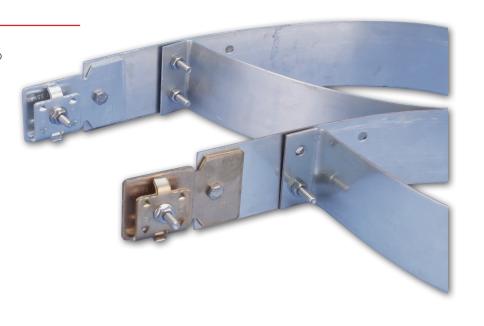

CROSS-RUN CABLE CONNECTOR

Cast bronze or aluminum cross-run or 4-way cable connector. Four bolts for positive bolt tension grip on cables. For use with all full size cables up to 4/0.



| Part No. | Material |
|----------|---------------|
| LPA595 | Aluminum |
| LPC595 | Bronze |
| LPC595L | Tinned Bronze |

BI-METALLIC CONNECTOR (LPA598)



Machined aluminum bi-metallic connector for making connections between copper and aluminum cables in straight run. Two-bolt tension grip on each cable end. For use with all full size cables up to 4/0.





THROUGH WALL & THROUGH ROOF CONNECTIONS

Through roof assemblies provide a connection point to transition the external lightning protection system to a concealed installation within the structure. Down conductors are then routed to a point near the ground where the conductors are transitioned outside the building to a grounding point. This is accomplished by using through wall assemblies. As an alternative, a through-roof assembly can provide a transition to a point within the structure where bonding to structural steel is used as the down conductor.

Most assemblies are provided with gaskets to seal the structure from moisture ingress. Additional protection can be provided with sealers that are selected based on the specific roofing material.

THROUGH WALL/ROOF CONNECTION



Bronze or aluminum cast concealed point base assemblies. Can be used with an air terminal or all thread. Positive bolt tension cable clamping for cables or wires, accepts one or two of any combination of full size and/or miniature bonding wires or cables in a parallel manner. Furnished with washer and standard UNC nut for secure connections.

| Rod Thread | Aluminum | Copper | Bi-metallic |
|---------------|----------|----------|-------------|
| 3/8" | | LPC61038 | LPC610BI38 |
| 1/2" | LPA61012 | LPC61012 | LPC610BI12 |
| 5/8" | LPA61058 | LPC61058 | LPC610BI58 |

THROUGH WALL/THROUGH ROOF CONNECTION **ASSEMBLIES**



Through roof and through wall assemblies allow for a weatherproof junction between lightning protection components and concealed downleads. A variety of connection methods and materials are offered to accommodate all field conditions. Always consult the roof manufacturer or owner for proper flashing materials.

| Part No. | Materials | Connector 1 | Connector 2 | Rod Length (in) |
|-------------|-----------|-------------|-------------|--------------------|
| LPA619 | Al-Al | LPA61012 | LPA61012 | 12 |
| LPC619 | Cu-Cu | LPC61012 | LPC61012 | 12 |
| LPC619A | Cu-Al | LPC61012 | LPA61012 | 12 |
| LPA620 | Al-Al | LPA61012 | LPA55312 | 12 |
| LPC620 | Cu-Cu | LPC61012 | LPC55312 | 12 |
| LPC620A | Cu-Al | LPC61012 | LPA55312 | 12 |
| LPA621 | Al-Al | LPA55312 | LPA55312 | 12 |
| LPC621 | Cu-Cu | LPC55312 | LPC55312 | 12 |
| LPC621A | Cu-Al | LPC55312 | LPA55312 | 12 |
| LPA622 | Al-Al | LPA55312 | LPA55312 | 6 |
| LPC622 | Cu-Cu | LPC55312 | LPC55312 | 6 |
| LPC622A | Cu-Al | LPC55312 | LPA55312 | 6 |

All Through Walls / Through Roofs utilize 1/2" stainless steel all-thread

THROUGH ROOF CONNECTION ASSEMBLIES



| Part No. | Materials | Top Connector | Bottom Connector | Point Diameter (in) | Rod Length (in) |
|-------------|-----------|------------------|---------------------|---------------------------|-----------------------|
| LPA62412 | Al-Al | LPA2932F2F | LPA61012 | 1/2 | 12 |
| LPA62458 | Al-Al | LPA2942F5F | LPA61012 | 5/8 | 12 |
| LPC62438 | Cu-Cu | LPC2923F2F | LPC61012 | 3/8 | 12 |
| LPC62412 | Cu-Cu | LPC2932F2F | LPC61012 | 1/2 | 12 |
| LPC62458 | Cu-Cu | LPC2942F5F | LPC61012 | 5/8 | 12 |
| LPC624A12 | Al-Cu | LPA2932F2F | LPC61012 | 1/2 | 12 |
| LPC624A58 | Al-Cu | LPA2942F5F | LPC61012 | 5/8 | 12 |
| LPA62612 | Al-Al | LPA2932F2F | LPA32112 | 1/2 | 12 |
| LPA62658 | Al-Al | LPA2942F5F | LPA32112 | 5/8 | 12 |
| LPC62638 | Cu-Cu | LPC2923F2F | LPC32112 | 3/8 | 12 |
| LPC62612 | Cu-Cu | LPC2932F2F | LPC32112 | 1/2 | 12 |
| LPC62658 | Cu-Cu | LPC2942F5F | LPC32112 | 5/8 | 12 |
| LPC626A12 | Al-Cu | LPA2932F2F | LPC32112 | 1/2 | 12 |
| LPC626A58 | Al-Cu | LPA2942F5F | LPC32112 | 5/8 | 12 |
| LPA62812 | Al-Al | LPA2832F2F | LPA61012 | 1/2 | 12 |
| LPA62858 | Al-Al | LPA2842F5F | LPA61012 | 5/8 | 12 |
| LPC62838 | Cu-Cu | LPC2823F2F | LPC61012 | 3/8 | 12 |
| LPC62812 | Cu-Cu | LPC2832F2F | LPC61012 | 1/2 | 12 |
| LPC62858 | Cu-Cu | LPC2842F5F | LPC61012 | 5/8 | 12 |
| LPC628A12 | Al-Cu | LPA2832F2F | LPC61012 | 1/2 | 12 |
| LPC628A58 | Al-Cu | LPA2842F5F | LPC61012 | 5/8 | 12 |

All Through Walls / Through Roofs utilize 1/2" all-thread

ALL THREAD ROD



Stainless steel all thread rod available either cut to order or in standard lengths. All threading to UNC standard.

| Part No. | Diameter (in) | Length (in) |
|-------------|------------------|----------------|
| LPS661CTO | 3/8 | Cut to order |
| LPS662CTO | 1/2 | Cut to order |
| LPS66212 | 1/2 | 12 |
| LPS66218 | 1/2 | 18 |
| LPS663CTO | 5/8 | Cut to order |

THROUGH ROOF PVC ASSEMBLIES



Through roof assemblies offer a parallel connection for above roof connection and either a flat-mount rod and cable holder or an inline splice. These products are available with either a full 1" PVC tube (full assembly) or a cap to fit over 1" PVC (upper connection). The outer dimension of the PVC tube is 1-5/16".

| Part No. | Materials | Connector 1 | Connector 2 | Rod Length (in) |
|-------------------|-------------------------|-------------|-------------|-----------------------|
| Full Assemb | | oomiector i | oomiector 2 | (11) |
| LPA66418 | Al-Al | LPA61012 | LPA30412 | 18 |
| LPC66418 | Cu-Cu | LPC61012 | LPC30412 | 18 |
| LPC664A18 | Al-Cu | LPA61012 | LPC30412 | 18 |
| LPA66424 | Al-Al | LPA61012 | LPA30412 | 24 |
| LPC66424 | Cu-Cu | LPC61012 | LPC30412 | 24 |
| LPC664A24 | Al-Cu | LPA61012 | LPC30412 | 24 |
| Upper Conn | ection | | | |
| LPA664 | Al-Al | LPA61012 | LPA32112 | - |
| LPC664 | Cu-Cu | LPC61012 | LPC32112 | - |
| LPC664A | Al-Cu | LPA61012 | LPC32112 | - |
| LPC664BI | Al-Cu or Cu-Cu | LPC610BI12 | LPC32112 | - |
| LPC664L | Tinned Cu- Tinned Cu | LPC610L12 | LPC321L12 | - |

All Through Walls / Through Roofs utilize 1/2" all-thread



Through roof assemblies offer a parallel connection for above roof connection and an 8 in² flat mount (UNC version) and an 8 in² flat mount with a straight splice (standard version). These products come with a full 1.5" PVC tube (full assembly). The outer dimension of the PVC tube is 1-7/8".

| Part No. | Materials | Connector 1 | Connector 2 | Rod Length (in) |
|--------------|-------------------------|-------------|------------------------|-----------------------|
| LPC66518 | Cu-Cu | LPC61012 | LPC34012 / LPC32112 | 18 |
| LPC66518BI | Al or Cu-Cu | LPC610BI12 | LPC34012 / LPC32112 | 18 |
| LPC66518NC | Cu-Cu | LPC61012 | LPC34012 | 18 |
| LPC66518NCBI | Tinned Cu- Tinned Cu | LPC610BI12 | LPC34012 | 18 |
| LPC66524 | Cu-Cu | LPC61012 | LPC34012 / LPC32112 | 24 |
| LPC66524BI | Al or Cu-Cu | LPC610BI12 | LPC34012 / LPC32112 | 24 |
| LPC66524NC | Cu-Cu | LPC61012 | LPC34012 | 24 |
| LPC66524NCBI | Tinned Cu- Tinned Cu | LPC610BI12 | LPC34012 | 24 |

All Through Walls / Through Roofs utilize 1/2" all-thread

POLYVINYLCHLORIDE PROTECTOR (LPP743)



Polyvinylchloride protector for cables through 5/8" diameter. For use where stranded cables are subject to displacement or damage. Protector 1" O.D. PVC Pipe, 10' long. Secure with Part No. LPC807 or LPC808 fasteners.

GALVANIZED SHEET STEEL PROTECTOR (LPP745)



Galvanized sheet steel protector for cables through 3/4" diameter. For use where stranded cables are subject to displacement or damage. Provided with 4 single hole clips.

PVC PROTECTOR




PVC protector for cables of all sizes up to 1" or 2". For use where stranded cables are subject to displacement or damage. Two sizes available in 8' lengths. Each section able to overlap for longer lengths.

| Part No. | Dimensions |
|-------------|------------|
| LPP74718 | 1" x 8' |
| LPP74728 | 2" x 8' |



GROUNDING ACCESSORIES

nVent is a worldwide leader providing grounding accessories that help ensure the dissipation of energy. The nVent ERICO brand of grounding accessories are made from high-quality materials that offer superior corrosion resistance and long-lasting performance. They are easy to install with innovative and time-saving features to accommodate a variety of customer needs.

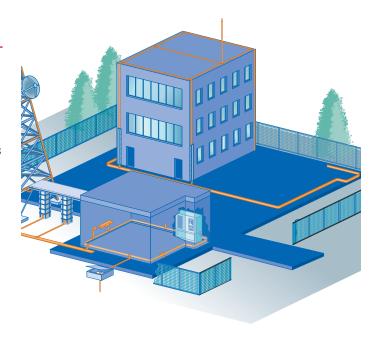

WELDING PLATE



Mild steel welding plate 1/4" x 4" x 4" for attachment to steel columns or beams when no holes may be made in steel member. Steel plate to be welded to steel column or beam. Fabricated with four 1/4-20 tapped holes, 2-1/4" apart on center.



Cast bronze aircraft type static grounding receptacle with standard pin connection and chain retained cover plate. Install flush with finished floor surface. Designed to couple directly to 3/4" sectional type ground rod or 3/4" extension rod. LPC681 comes with additional spring clip.

GROUNDING PLATE



Cast bronze grounding plate for equipment, machinery, or structure grounding points. May be installed flush in concrete floor or wall. Face measures 3-1/4" square with four holes for 1/2" bolts on 1-3/4' center. Cable connection under bolt tension. For all standard cables.


BONDING ASSEMBLIES



Prefabricated cable to reinforcing bar bonding assemblies. Catalog numbered assembly includes 18" of #4 reinforcing bar with an exothermic weld to 5 ft. of copper cable. Wire tie or weld bar to construction steel before pouring concrete and route cable tail to down lead or ground lead location.

GROUND PLATE





20 gauge copper ground plates for providing ground location in areas where ground rods are not drivable, such as rocky soil.

| Part No. | Width (in) | Length (in) | No. of Attachments | Type of Attachment |
|-------------|---------------|----------------|-----------------------|-----------------------|
| LPC750 | 12 | 24 | 2 | LPC535 |
| LPC751 | 18 | 18 | 2 | LPC535 |
| LPC752 | 36 | 36 | 2 | LPC535 |
| LPC753 | 12 | 24 | 1 | LPC532 |
| LPC754 | 18 | 18 | 1 | LPC532 |
| LPC755 | 36 | 36 | 1 | LPC532 |

GROUND ROD CLAMPS




Made of high-conductivity bronze and features stainless steel bolts and threaded, high-strength rivet nuts. Accomodates ground rods from 1/2" to 3/4" and conductors from class 1 to 4/0.



U-Bolt ground rod clamp with high conductivity bronze casting and high strength stainless steel u-bolt. Three inch contact between clamp and cable. Accomodates ground rods from 1/2" to 1" and cable from class 1 to 4/0.

The chapter highlights a portion of the grounding products nVent offers. A complete listing is available in the Grounding & Bonding Catalog.

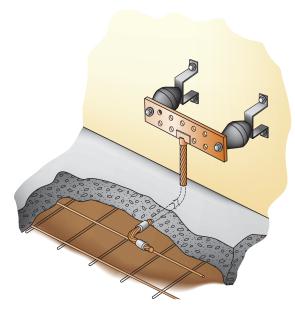

BUSBARS



E G B A 1 4 4 1 2 C C

ERICO Ground Bar Designaton

Configuration

A = Insul & Brkt

B = Brkt only

C = None (Bar only)

D = Insul only

Thickness

 $18 = \frac{1}{8}$ " 38 = 3/8"

 $58 = \frac{5}{8}$ "

 $14 = \frac{1}{4}$ " 12 = 1/2"

 $34 = \frac{3}{4}$ "

Width

1 = 1"

2 = 2"

3 = 3"

4 = 4"5 = 5"

6 = 6"

7 = 7"

8 = 8" $9 = 9^{6}$

Pig Tail Length Ft.

(Empty if none) N = 16

0 = 17P = 18 C = 3

D = 4Q = 19E = 5 S = 24

T = 25F = 6G = 7U = 26

H = 8V = 27J = 9W = 32

K = 10X = 34

L = 11 Y = 36

M = 12 Z = 38

ERICO Cable Code (Empty if none)

1K = #4 Sol Tin 1T = #2 Sol Tin

2C = 1/0

SG = 2/0

2L = 3/0

2Q = 4/02V = 250 KCM

3D = 350 KCM


3Q = 500 KCM 4L = 750 KCM

Tin Plating (Empty if none)

T = Tinned

Hole Pattern

Length (rounded to the nearest inch, up to 96 inch max.)

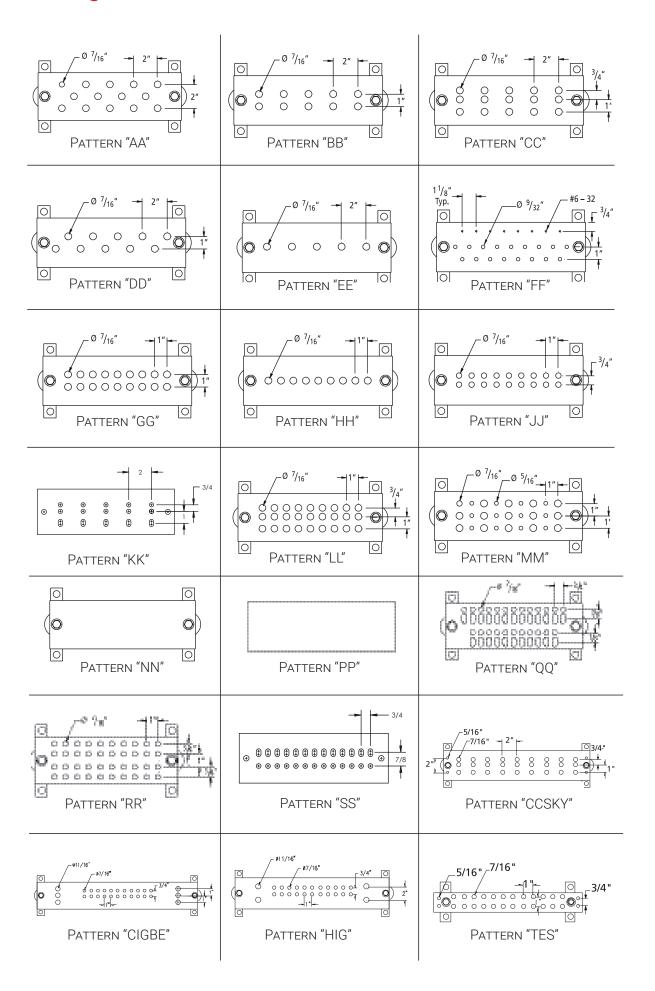


GROUND RODS

COPPER-BONDED GROUND RODS

Pointed Rods

- 99.9% pure electrolytic copper coating
- · Molecular bond to nickel-sealed high strength steel core





| Part No. | Nominal Diameter (in) | Length (ft) | Plating Thickness (mils) | Weight per 100 rods (lbs) | Standard Bundle |
|-------------|-----------------------------|----------------|--------------------------------|---------------------------------|--------------------|
| 611380 | 1/2 | 8 | 10 | 553 | 5 |
| 615880 | 5/8 | 8 | 10 | 680 | 5 |
| 613480 | 3/4 | 8 | 10 | 1,000 | 5 |
| 611300 | 1/2 | 10 | 10 | 738 | 5 |
| 615800 | 5/8 | 10 | 10 | 844 | 5 |
| 613400 | 3/4 | 10 | 10 | 1,240 | 5 |

COPPER-BONDED GROUND RODS

Sectional, Threaded Rods



- · Cold-rolled threads with continuous, unbroken grain flows preserve copper coating and are stronger than cut threads
- Electrolytically copper-bonded steel: copper is molecularly bonded to nickelsealed, high-strength steel cores
- Minimum copper coating of 10 mils on rods listed to UL® 467

| Part No. | Nominal Diameter (in) | Length (ft) | Plating Thickness (mils) | Weight per 100 rods (lbs) | Standard Bundle |
|-------------|-----------------------------|----------------|--------------------------------|---------------------------------|--------------------|
| 631300 | 1/2 | 10 | 10 | 688 | 5 |
| 631380 | 1/2 | 8 | 10 | 540 | 5 |
| 633400 | 3/4 | 10 | 10 | 1,240 | 5 |
| 633480 | 3/4 | 8 | 10 | 1,000 | 5 |
| 635800 | 5/8 | 10 | 10 | 844 | 5 |
| 635880 | 5/8 | 8 | 10 | 680 | 5 |

SOLID COPPER RODS




| Part No. | Diameter (in) | Length (ft) |
|-------------|------------------|----------------|
| LPC700 | 1/2 | 8 |
| LPC702 | 1/2 | 10 |
| LPC704 | 5/8 | 8 |
| LPC706 | 5/8 | 10 |
| LPC711 | 3/4 | 10 |

CHEMICAL GROUND RODS

Chemical ground electrodes, part of the ERICO line of Facility Electrical Protection products from nVent, provide a low impedance ground in locations of high soil resistivity and dry soil conditions.

> Vertical Installation Horizontal Installation

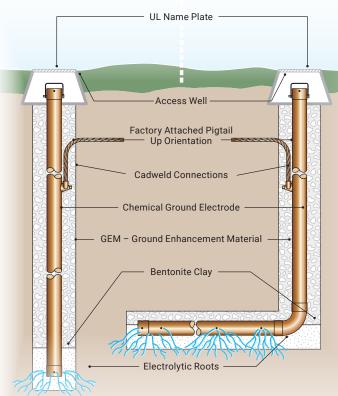

Chemical Ground Electrodes can be installed either vertically or horizontally. Chemical electrodes are available in a range of standard and custom configurations. They can be purchased individually or part of a complete kit.

Ground Rod Accessories

THREADLESS COMPRESSION COUPLERS FOR **COPPER-BONDED POINTED RODS**



- Made of high-strength silicon bronze
- · Tapered so when rod is driven into coupling, parts compress to form a conductive connection
- UL & CSA® Listed



| Part No. | Nominal Rod Diameter (in) | Unit Weight (lbs) | Unit Weight (kg) | Standard Package |
|----------|------------------------------|----------------------|---------------------|---------------------|
| CC12F | 1/2 (full) | 0.240 | 0.108 | 25 |
| CC58 | 5/8 | 0.300 | 0.134 | 25 |
| CC34 | 3/4 | 0.450 | 0.202 | 25 |

COUPLERS FOR THREADED RODS



- High-strength couplings are threaded bronze and chamfered at both ends for easy driving
- · Corrosion-resistant couplings ensure permanent, low-resistance copper-to-copper connections
- · UL® & CSA® Listed

| Part No. | Nominal Rod Diameter (in) | Standard Package |
|----------|---------------------------|---------------------|
| CR12S | 1/2 (full) | 25 |
| CR58 | 5/8 | 25 |
| CR34 | 3/4 | 25 |
| CR100 | 1 | 1 |



High Density Polyethylene Inspection Wells (HDPE)









T416B

T416BH

T416C

| Part No. | Diameter at grade level (in) | Outside Diameter (in) | Depth (in) | Cover Weight (lbs) | Weight of Box Base with Inserts (lbs) |
|----------|---------------------------------------|-----------------------------|---------------|--------------------------|---|
| T416B | 9.125 | 13 | 10.25 | 1.5 | 3 |

Stainless steel lock bolt $(3/8" - 16 \times 1-3/4")$; boxes and covers nest in 3.25" increments; 2 knockouts per box $(3.5" \times 1.5")$; color: green

T416BH 9.125 10.25 1.5 13

Includes 4 additional 1/2" bolts on cover. Stainless steel lock bolt $(3/8" - 16 \times 1-3/4")$; boxes and covers nest in 3.25" increments; 2 knockouts per box (3.5" x 1.5"); color: green


T416C 13.4 24.5 18.25 4.2

Pipe slot (2 places); color: black T416CKEY: Key for T416C Inspection Well

nVent ERICO Cadweld Lightning Protection Molds



Cadweld Lightning Protection Molds

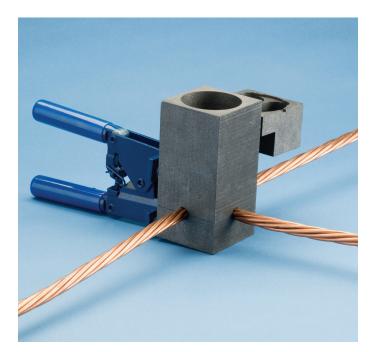


CADWELD LIGHTNING PROTECTION MOLDS

Cadweld lightning protection molds create a permanent molecular bond that will not loosen or corrode over time, and the connection provides a current carrying (fusing) capacity equal to that of the conductor. No external power source or heat is required for use, and the connections can be easily checked for quality by visual inspection.

No special skills are required for use with Cadweld lightning protection molds, which helps to keep labor costs low. They are made with lightweight and portable equipment and can be used with either Cadweld or Cadweld Plus welding material.

The Cadweld Mold Numbering System



Examples



| Cadweld | Codes* |
|---------|--|
| 16 | 5/8" Copper-bonded Ground Rod |
| 18 | 3/4" Copper-bonded Ground Rod |
| 8C | LPC120, LPC121, LPC122 Lightning Conductor |
| 8D | LPC125, LPC126R, LPC128, LPC401 Lightning Conductor |
| 8F | LPC123, LPC127 Lightning Conductor |
| 8G | LPC124 Lightning Conductor |
| 2L | 3/0 Concentric Stranded, LPC136 |
| 2Q | 4/0 Concentric Stranded, LPC137, LPC404 |
| 1V | #2 Concentric Stranded |

*For other cable sizes, please contact nVent or visit nVent.com/ERICO.







| Mold Part No. * | Cadweld Welding Material Part Number | Cadweld Plus Part Number | |
|--------------------|---|-----------------------------|--|
| GRC168C | 115 | 115PLUSF20 | |
| GRC188C | 115 | 115PLUSF20 | |
| GRC188G | 115 | 115PLUSF20 | |
| GTC168C | 150 | 150PLUSF20 | |
| GTC168D | 150 | 150PLUSF20 | |
| GTC188C | 150 | 150PLUSF20 | |
| GTC188D | 150 | 150PLUSF20 | |
| GTC188G | 200 | 200PLUSF20 | |
| TAC2Q8C | 115 | 115PLUSF20 | |
| TAC2Q8D | 115 | 115PLUSF20 | |
| TAC2Q8G | 150 | 150PLUSF20 | |
| TAC8C8C | 115 | 115PLUSF20 | |
| TAC8D8C | 115 | 115PLUSF20 | |
| TAC8D8D | 115 | 115PLUSF20 | |
| TAC8G8G | 150 | 150PLUSF20 | |

^{*} For additional mold options contact nVent ERICO or visit nVent.com/ERICO.


Cadweld Lightning Protection Molds






GΥ

| Mold Part No. | Cadweld Welding Material Part Number | Cadweld Plus Part Number |
|------------------|--|-----------------------------|
| GYE188C | 150 | 150PLUSF20 |
| GYF188D | 150 | 150PLUSE20 |




| Mold Part No. | Cadweld Welding Material Part Number | Cadweld Plus Part Number |
|------------------|--|-----------------------------|
| SSC8C | 65 | 65PLUSF20 |
| SSC8D | 90 | 90PLUSF20 |



| Mold Part No. | Cadweld Welding Material Part Number | Cadweld Plus Part Number |
|------------------|--|-----------------------------|
| LAC8G001 | 150 | 150PLUSF20 |



| Mold Part No. | Cadweld Welding Material Part Number | Cadweld Plus Part Number |
|------------------|--|-----------------------------|
| VFC8C | 115 | 115PLUSF20 |



| Mold Part No. | Cadweld Welding Material Part Number | Cadweld Plus Part Number |
|------------------|--|-----------------------------|
| PTC2Q8C | 150 | 150PLUSF20 |
| PTC8C1V | 115 | 115PLUSF20 |
| PTC8C8C | 150 | 150PLUSF20 |
| PTC8D8D | 200 | 200PLUSF20 |



| Mold Part No. | Cadweld Welding Material Part Number | Cadweld Plus Part Number |
|------------------|--|-----------------------------|
| VSC8C | 90 | 90PLUSF20 |
| VSC8D | 115 | 115PLUSF20 |
| | | |

Cadweld Lightning Protection Molds



Accessories



XLL160 Handle Clamps (Excludes T320)



T111 $Sure fire^{\mathsf{TM}}$ Torch Head



T321 Rasp



T320 Flint Ignitor



T313 Card Cleaning Brush



T394 Mold Cleaning Brush



PLUSCU CADWELD PLUS Control Unit



T314 Cable Cleaning Brush




T403 Mold Sealer





COPPER & ALUMINUM CABLE/CONDUIT STRAPS

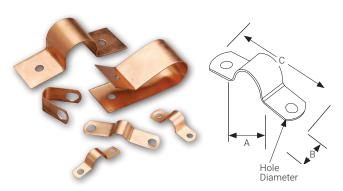

Cable straps are designed to secure lightning protection conductors and prevent displacement. They are mechanically secured with screws or nails and typically installed every 3 feet of conductor.

| Part No. | Material | A (in) | B (in) | C (in) | Connection | Hole Diameter (in) |
|-------------|------------------|-----------|-----------|-----------|------------|--------------------------|
| LPC801 | Copper | - | 3/8 | - | One hole | 3/16 |
| LPC802 | Copper | 15/32 | 3/8 | 1.65 | Two hole | 3/16 |
| LPA803 | Aluminum | - | 1/2 | - | One hole | 3/16 |
| LPC803 | Copper | - | 1/2 | - | One hole | 3/16 |
| LPA804 | Aluminum | 15/32 | 1/2 | 1.65 | Two hole | 3/16 |
| LPC804 | Copper | 15/32 | 1/2 | 1.65 | Two hole | 3/16 |
| LPA805 | Aluminum | - | 1/2 | - | One hole | 9/32 |
| LPC805 | Copper | - | 1/2 | - | One hole | 9/32 |
| LPC805L | Tinned Copper | - | 1/2 | - | One hole | 9/32 |
| LPA806 | Aluminum | 1/2 | 1/2 | 2.11 | Two hole | 9/32 |
| LPC806 | Copper | 1/2 | 1/2 | 2.11 | Two hole | 9/32 |
| LPA807 | Aluminum | - | 1-1/4 | - | One hole | 9/32 |
| LPC807 | Copper | - | 1-1/4 | - | One hole | 9/32 |
| LPA808 | Aluminum | 1.03 | 1-1/4 | 3.94 | Two hole | 9/32 |
| LPC808 | Copper | 1.03 | 1-1/4 | 3.94 | Two hole | 9/32 |

Fasteners

For the majority of lightning applications, conductors are required to be fastened to the structure every three feet. Fasteners can be connected to the structure with mechanical hardware or adhesive. Both mechanical and finger-type connections are permitted.



CABLE HOLDERS



Flat cable holder for use with hot pitch, roofing compound or commercial adhesive on built-up roof surfaces or other location where penetration cannot be made. For use with all sizes of conductor.

| Part No. | Material | Connection Type |
|-------------|---------------|--------------------|
| LPA809 | Aluminum | Mechanical |
| LPC809 | Copper | Mechanical |
| LPC809L | Tinned Copper | Mechanical |
| LPA810 | Aluminum | Crimp |
| LPC810 | Copper | Crimp |
| LPC810L | Tinned Copper | Crimp |

STANDING-SEAM CLAMPS - SERIES 814



Brass or aluminum cable holder for standing seam roofing systems. Bottom groove machined.563" wide and 1" deep to secure on seam with 1/2"-20 screw. For use with 805 single hole series of straps for securing conductors.

| Part No. | Material |
|-------------|----------|
| | Material |
| LPA814 | Aluminum |
| LPC814 | Copper |

SERIES 815



Stainless steel cable holder for standing seam roofing systems. Groove is variable up to 1" wide for rectangular seams or beams, also suitable mounting to seams with rounded or boxed ridge up to 1-1/2" wide. Cable fastener adjusts for either parallel or perpendicular cable runs. For use with 805 single hole straps for securing conductors.

| Part No. | Material |
|----------|-----------------|
| LPS815 | Stainless Steel |

TREE SPIKES



LPC823 heavy duty bronze cast tree drive anchor for main or miniature cable. Drive anchor, then pinch cable holder.

ADHESIVE



M-1 is a high performance, solvent free, UV resistant, moisture curing polyether (tri-polymer). It is a multi-purpose structural sealant designed for difficult bonding and sealing applications. It is ideal for installations on EPDM, TPO and PVC membranes. It bonds aggressively to EPDM, PVC, BUR, coal tar, SBS modified bitumen, granulated APP, asphalt shingles, many types of coated metal, metal flashing details.

| Part | Size (Oz.) | Color | |
|------------|------------|-------|--|
| LPP899BK | 10.1 | Black | |
| LPP899GY | 10.1 | Grey | |
| LPP899WH | 10.1 | White | |
| LPP899WH28 | 30 | White | |

A single 10 oz tube will adhere roughly 12 air terminal bases or 25 cable holders.

MISCELLANEOUS FASTENERS & ACCESSORIES



| Part No. | Description |
|----------|--|
| A928Q001 | 1/4"-20 x 5/8" Rubber Expansion Anchor |
| A931A002 | .14" x 1-1/2" 4D Stainless Steel Slating Nail |
| A931A006 | .14" x 2-1/2" 8D Stainless Steel Slating Nail |
| A927P020 | #10 x 1-1/2" Stainless Steel Wood Screw |
| A927P023 | #10 x 5/8" Hex Pan head Stainless Steel self- tapping screw |
| A927P024 | #10 x 1" Hex Pan head Stainless Steel self-tapping screw |
| LPG848 | Galvanized steel toggle bolt, 1/2" x 3" |

EXPANSION ANCHORS



| Part No. | Drill Hole Diameter (in) | Drill Hole Depth (in) | Description |
|-------------|-----------------------------|--------------------------|--|
| A930W004 | 1/4 | 1-1/4 | Drive-in anchor with stainless steel nail, 1/4" x 1-1/4" |
| A930W009 | 7/8 | 1-3/4 | Expansion shield anchor for use with 1-1/2" "LG" stud products |
| A930W011 | 5/8 | 2 | Steel Drop-in anchor |

STAINLESS STEEL HEX HEAD BOLTS



| Length (in) | 1/4"-20 | 5/16"-18 | 3/8"-16 | 1/2"-13 |
|-------------|----------|----------|----------|----------|
| 1/2 | A927F177 | - | - | - |
| 3/4 | A927F179 | A927F187 | A927F193 | - |
| 1 | A927F181 | A927F189 | A927F195 | A927F199 |
| 1-1/4 | A927F183 | A927F236 | - | - |
| 1-1/2 | A927F185 | A927F191 | A927F197 | A927F201 |
| 2 | - | - | - | A927F203 |

STAINLESS STEEL SPLIT LOCK-WASHERS



| Size (in) | Flat | Split Lock | |
|-----------|----------|------------|--|
| 1/4 | A929A095 | A929B038 | |
| 5/16 | A929A097 | A929B024 | |
| 3/8 | A929A099 | A929B025 | |
| 1/2 | A929A101 | A929B026 | |
| 5/8 | A929A103 | A929B036 | |
| 3/4 | A929A105 | A929B040 | |

STAINLESS STEEL HEX HEAD NUTS



| Size (in) | Stainless |
|-----------|-----------|
| 1/4-20 | A928K011 |
| 5/16-18 | A928K017 |
| 3/8-16 | A928K019 |
| 1/2-13 | A928K021 |
| 5/8-11 | A928K023 |
| 3/4-10 | A928K025 |

NEOPRENE SEALING WASHERS



| Size (in) | Neoprene |
|-----------|----------|
| #10 Screw | A929H001 |
| 1/4 Bolt | A929H002 |
| 5/16 Bolt | A929H003 |
| 3/8 Bolt | A929H004 |
| 1/2 Bolt | A929H005 |
| 5/8 Bolt | A929H006 |

POLYVINYLCHLORIDE PROTECTOR (LPP743)



Polyvinylchloride protector for cables through 5/8" diameter. For use where stranded cables are subject to displacement or damage. Protector 1" O.D. PVC Pipe, 10' long. Secure with Part No. LPC807 or LPC808 fasteners.

GALVANIZED SHEET STEEL PROTECTOR (LPP745)



Galvanized sheet steel protector for cables through 3/4" diameter. For use where stranded cables are subject to displacement or damage. Provided with 4 single hole clips.

PVC PROTECTOR



PVC protector for cables of all sizes up to 1" or 2". For use where stranded cables are subject to displacement or damage. Two sizes available in 8' lengths. Each section able to overlap for longer lengths.

| Part No. | Dimensions |
|----------|------------|
| LPP74718 | 1" x 8' |
| LPP74728 | 2" x 8' |

| Part Number | Page |
|-------------|------|
| 611300 | 47 |
| 611380 | 47 |
| 613400 | 47 |
| 613480 | 47 |
| 615800 | 47 |
| 615880 | 47 |
| 631300 | 47 |
| 631380 | 47 |
| 633400 | 47 |
| 633480 | 47 |
| 635800 | 47 |
| 635880 | 47 |
| A927F177 | 56 |
| A927F179 | 56 |
| A927F181 | 56 |
| A927F183 | 56 |
| A927F185 | 56 |
| A927F187 | 56 |
| A927F189 | 56 |
| A927F191 | 56 |
| A927F193 | 56 |
| A927F195 | 56 |
| A927F197 | 56 |
| A927F199 | 56 |
| A927F201 | 56 |
| A927F203 | 56 |
| A927P020 | 55 |
| A927P023 | 55 |
| A927P024 | 55 |
| A928K011 | 56 |
| A928K017 | 56 |
| A928K019 | 56 |
| A928K021 | 56 |
| A928K023 | 56 |
| A928K025 | 56 |
| A928Q001 | 55 |
| A929A095 | 56 |
| A929A097 | 56 |
| A929A099 | 56 |
| A929A101 | 56 |
| A929A103 | 56 |
| A929A105 | 56 |
| A929B024 | 56 |
| A929B025 | 56 |
| | |

| Part Number | Page |
|-------------|------|
| A929B026 | 56 |
| A929B036 | 56 |
| A929B038 | 56 |
| A929B040 | 56 |
| A929H001 | 56 |
| A929H002 | 56 |
| A929H003 | 56 |
| A929H004 | 56 |
| A929H005 | 56 |
| A929H006 | 56 |
| A930W004 | 56 |
| A930W009 | 56 |
| A930W011 | 56 |
| A931A002 | 55 |
| A931A006 | 55 |
| CC12F | 48 |
| CC34 | 48 |
| CC58 | 48 |
| CR100 | 48 |
| CR12S | 48 |
| CR34 | 48 |
| CR58 | 48 |
| GRC168C | 50 |
| GRC188C | 50 |
| GRC188G | 50 |
| GTC168C | 50 |
| GTC168D | 50 |
| GTC188C | 50 |
| GTC188D | 50 |
| GTC188G | 50 |
| GYE188C | 51 |
| GYE188D | 51 |
| LAC8G001 | 51 |
| LPA100 | 14 |
| LPA101 | 14 |
| LPA102 | 14 |
| LPA105 | 14 |
| LPA140 | 16 |
| LPA141 | 16 |
| LPA221 | 18 |
| LPA221ST | 18 |
| LPA222 | 18 |
| LPA222ST | 18 |
| LPA223 | 18 |

| Part Number | Page |
|-------------|------|
| LPA223ST | 18 |
| LPA224 | 18 |
| LPA224ST | 18 |
| LPA225 | 18 |
| LPA225ST | 18 |
| LPA226 | 18 |
| LPA226ST | 18 |
| LPA227 | 18 |
| LPA227ST | 18 |
| LPA228 | 18 |
| LPA228ST | 18 |
| LPA241 | 18 |
| LPA241ST | 18 |
| LPA242 | 18 |
| LPA242ST | 18 |
| LPA243 | 18 |
| LPA243ST | 18 |
| LPA244 | 18 |
| LPA244MST | 18 |
| LPA244ST | 18 |
| LPA245 | 18 |
| LPA245ST | 18 |
| LPA246 | 18 |
| LPA246ST | 18 |
| LPA247 | 18 |
| LPA247MST | 18 |
| LPA247ST | 18 |
| LPA248 | 18 |
| LPA248ST | 18 |
| LPA252 | 19 |
| LPA254 | 19 |
| LPA255 | 19 |
| LPA262 | 19 |
| LPA264 | 19 |
| LPA265 | 19 |
| LPA272CTO | 19 |
| LPA273CTO | 19 |
| LPA27512 | 19 |
| LPA27558 | 19 |
| LPA27812 | 20 |
| LPA27858 | 20 |
| LPA29612 | 20 |
| LPA29658 | 20 |
| LPA30212 | 22 |

| Part Number | Page |
|-------------|------|
| LPA30258 | 22 |
| LPA30412 | 22 |
| LPA30458 | 22 |
| LPA30512 | 22 |
| LPA30558H | 22 |
| LPA30558V | 22 |
| LPA30912 | 23 |
| LPA30958 | 23 |
| LPA31212 | 23 |
| LPA31258 | 23 |
| LPA31512 | 23 |
| LPA31558 | 23 |
| LPA31812 | 23 |
| LPA31858 | 23 |
| LPA31912 | 24 |
| LPA31958 | 24 |
| LPA32112 | 24 |
| LPA32158 | 24 |
| LPA330 | 24 |
| LPA331 | 24 |
| LPA33912 | 24 |
| LPA33958 | 24 |
| LPA34012 | 24 |
| LPA34058 | 24 |
| LPA34512 | 24 |
| LPA34558 | 24 |
| LPA34712 | 25 |
| LPA34758 | 25 |
| LPA34812 | 25 |
| LPA34858 | 25 |
| LPA37112 | 25 |
| LPA37158 | 25 |
| LPA37212 | 26 |
| LPA37258 | 26 |
| LPA501 | 34 |
| LPA502 | 34 |
| LPA503 | 34 |
| LPA505 | 34 |
| LPA508 | 34 |
| LPA510 | 34 |
| LPA513 | 34 |
| LPA516 | 35 |
| LPA517 | 35 |
| LPA527 | 35 |
| | |

| Part Number | Page |
|-------------|------|
| LPA528 | 35 |
| LPA532 | 35 |
| LPA533 | 35 |
| LPA535 | 35 |
| LPA536 | 35 |
| LPA537 | 35 |
| LPA540 | 35 |
| LPA55112 | 36 |
| LPA55138 | 36 |
| LPA55312 | 36 |
| LPA55314 | 36 |
| LPA55338 | 36 |
| LPA554 | 36 |
| LPA555 | 36 |
| LPA557 | 36 |
| LPA559 | 36 |
| LPA570 | 37 |
| LPA571 | 37 |
| LPA580 | 37 |
| LPA588 | 38 |
| LPA590 | 38 |
| LPA595 | 38 |
| LPA595L | 38 |
| LPA5962 | 37 |
| LPA5963 | 37 |
| LPA5964 | 37 |
| LPA5966 | 37 |
| LPA598 | 38 |
| LPA61012 | 40 |
| LPA61058 | 40 |
| LPA619 | 40 |
| LPA620 | 40 |
| LPA621 | 40 |
| LPA622 | 40 |
| LPA62412 | 41 |
| LPA62458 | 41 |
| LPA62612 | 41 |
| LPA62658 | 41 |
| LPA62812 | 41 |
| LPA62858 | 41 |
| LPA664 | 41 |
| LPA66418 | 41 |
| LPA66424 | 41 |
| LPA669 | 26 |
| | |

| Part Number | Page |
|-------------|------|
| LPA670 | 26 |
| LPA671 | 26 |
| LPA672 | 26 |
| LPA673 | 26 |
| LPA674 | 26 |
| LPA675 | 26 |
| LPA676 | 26 |
| LPA677 | 26 |
| LPA678 | 26 |
| LPA803 | 54 |
| LPA804 | 54 |
| LPA805 | 54 |
| LPA806 | 54 |
| LPA807 | 54 |
| LPA808 | 54 |
| LPA809 | 54 |
| LPA810 | 54 |
| LPA814 | 55 |
| LPA858 | 36 |
| LPC120 | 15 |
| LPC120L | 15 |
| LPC122 | 15 |
| LPC122L | 15 |
| LPC123 | 15 |
| LPC124 | 15 |
| LPC124L | 15 |
| LPC125 | 15 |
| LPC126R | 15 |
| LPC126RL | 15 |
| LPC127 | 15 |
| LPC127L | 15 |
| LPC128 | 15 |
| LPC136 | 15 |
| LPC137 | 15 |
| LPC137L | 15 |
| LPC150 | 16 |
| LPC151 | 16 |
| LPC154 | 16 |
| LPC154L | 16 |
| LPC201B | 18 |
| LPC201BST | 18 |
| LPC202 | 18 |
| LPC202B | 18 |
| LPC202BST | 18 |
| | |

| Part Number | Page |
|-------------|------|
| LPC202LST | 18 |
| LPC202ST | 18 |
| LPC203 | 18 |
| LPC203B | 18 |
| LPC203BST | 18 |
| LPC203LST | 18 |
| LPC203ST | 18 |
| LPC204 | 18 |
| LPC204B | 18 |
| LPC204BST | 18 |
| LPC204LST | 18 |
| LPC204ST | 18 |
| LPC205 | 18 |
| LPC205B | 18 |
| LPC205BST | 18 |
| LPC205LST | 18 |
| LPC205ST | 18 |
| LPC206 | 18 |
| LPC206B | 18 |
| LPC206BST | 18 |
| LPC206LST | 18 |
| LPC206ST | 18 |
| LPC207 | 18 |
| LPC207B | 18 |
| LPC207BST | 18 |
| LPC207LST | 18 |
| LPC207ST | 18 |
| LPC208 | 18 |
| LPC208B | 18 |
| LPC208BST | 18 |
| LPC208LST | 18 |
| LPC208ST | 18 |
| LPC221B | 18 |
| LPC221BST | 18 |
| LPC222 | 18 |
| LPC222B | 18 |
| LPC222BST | 18 |
| LPC222LST | 18 |
| LPC222ST | 18 |
| LPC223 | 18 |
| LPC223B | 18 |
| LPC223BST | 18 |
| LPC223LST | 18 |
| LPC223ST | 18 |
| | |

| Part Number | Page |
|-------------|------------|
| LPC224 | Page 18 |
| LPC224B | 18 |
| LPC224BST | 18 |
| LPC224BST | 18 |
| LPC224LST | 18 |
| LPC22451 | |
| | 18 |
| LPC225B | 18 |
| LPC225BST | 18 |
| LPC225LST | 18 |
| LPC225ST | 18 |
| LPC226 | 18 |
| LPC226B | 18 |
| LPC226BST | 18 |
| LPC226LST | 18 |
| LPC226ST | 18 |
| LPC227 | 18 |
| LPC227B | 18 |
| LPC227BST | 18 |
| LPC227LST | 18 |
| LPC227ST | 18 |
| LPC228 | 18 |
| LPC228B | 18 |
| LPC228BST | 18 |
| LPC228LST | 18 |
| LPC228ST | 18 |
| LPC241B | 18 |
| LPC241BST | 18 |
| LPC242 | 18 |
| LPC242B | 18 |
| LPC242BST | 18 |
| LPC242LST | 18 |
| LPC242ST | 18 |
| LPC243 | 18 |
| LPC243B | 18 |
| LPC243BST | 18 |
| LPC243LST | 18 |
| LPC243ST | 18 |
| LPC244 | 18 |
| LPC244B | 18 |
| LPC244BST | 18 |
| LPC244LST | 18 |
| LPC244MBST | 18 |
| LPC244ST | 18 |
| LPC245 | 18 |
| | |

| Part Number | Page |
|-------------|------|
| LPC245B | 18 |
| LPC245BST | 18 |
| LPC245LST | 18 |
| LPC245ST | 18 |
| LPC246 | 18 |
| LPC246B | 18 |
| LPC246BST | 18 |
| LPC246LST | 18 |
| LPC246ST | 18 |
| LPC247 | 18 |
| LPC247B | 18 |
| LPC247BST | 18 |
| LPC247LST | 18 |
| LPC247MBST | 18 |
| LPC247ST | 18 |
| LPC248 | 18 |
| LPC248B | 18 |
| LPC248BST | 18 |
| LPC248LST | 18 |
| LPC248ST | 18 |
| LPC252 | 19 |
| LPC254 | 19 |
| LPC255 | 19 |
| LPC262 | 19 |
| LPC264 | 19 |
| LPC265 | 19 |
| LPC271CTO | 19 |
| LPC272CTO | 19 |
| LPC273CTO | 19 |
| LPC27512 | 19 |
| LPC27558 | 19 |
| LPC27812 | 20 |
| LPC27838 | 20 |
| LPC27858 | 20 |
| LPC29612 | 20 |
| LPC29638 | 20 |
| LPC29658 | 20 |
| LPC30212 | 22 |
| LPC30238 | 22 |
| LPC30258 | 22 |
| LPC302L12 | 22 |
| LPC302L38 | 22 |
| LPC302L58 | 22 |
| LPC30412 | 22 |
| | |

| Part Number | Page |
|-------------|------|
| LPC30438 | 22 |
| LPC30458 | 22 |
| LPC30512 | 22 |
| LPC30538 | 22 |
| LPC30558H | 22 |
| LPC30558V | 22 |
| LPC305L12 | 22 |
| LPC305L38 | 22 |
| LPC305L58H | 22 |
| LPC305L58V | 22 |
| LPC30912 | 23 |
| LPC30938 | 23 |
| LPC30958 | 23 |
| LPC31212 | 23 |
| LPC31238 | 23 |
| LPC31258 | 23 |
| LPC31512 | 23 |
| LPC31538 | 23 |
| LPC31558 | 23 |
| LPC31812 | 23 |
| LPC31838 | 23 |
| LPC31858 | 23 |
| LPC31912 | 24 |
| LPC31938 | 24 |
| LPC31958 | 24 |
| LPC32112 | 24 |
| LPC32138 | 24 |
| LPC32158 | 24 |
| LPC330 | 24 |
| LPC330L | 24 |
| LPC331 | 24 |
| LPC331L | 24 |
| LPC33912 | 24 |
| LPC33938 | 24 |
| LPC33958 | 24 |
| LPC34012 | 24 |
| LPC34038 | 24 |
| LPC34058 | 24 |
| LPC34512 | 24 |
| LPC34538 | 24 |
| LPC34558 | 24 |
| LPC34712 | 25 |
| LPC34738 | 25 |
| LPC34758 | 25 |
| | |

| David Named | D |
|-------------|------|
| Part Number | Page |
| LPC34812 | 25 |
| LPC34838 | 25 |
| LPC34858 | 25 |
| LPC37112 | 25 |
| LPC37138 | 25 |
| LPC37158 | 25 |
| LPC371L12 | 25 |
| LPC371L38 | 25 |
| LPC371L58 | 25 |
| LPC37212 | 26 |
| LPC37238 | 26 |
| LPC37258 | 26 |
| LPC372L12 | 26 |
| LPC372L38 | 26 |
| LPC372L58 | 26 |
| LPC401 | 30 |
| LPC404 | 30 |
| LPC401CTO | 28 |
| LPC404CTO | 28 |
| LPC415 | 28 |
| LPC416 | 28 |
| LPC417 | 28 |
| LPC418 | 28 |
| LPC421 | 28 |
| LPC422 | 28 |
| LPC423 | 28 |
| LPC424 | 28 |
| LPC425 | 28 |
| LPC426 | 28 |
| LPC427 | 28 |
| LPC428 | 28 |
| LPC431 | 29 |
| LPC433 | 29 |
| LPC435LG | 29 |
| LPC435SH | 29 |
| LPC436LG | 29 |
| LPC436SH | 29 |
| LPC437LG | 29 |
| LPC437SH | 29 |
| LPC441 | 30 |
| LPC443 | 30 |
| LPC446 | 30 |
| LPC448 | 30 |
| LPC451 | 30 |
| | |

| Part Number | Page |
|-------------|------|
| LPC456 | 30 |
| LPC464 | 30 |
| LPC465 | 30 |
| LPC466 | 30 |
| LPC467 | 30 |
| LPC4670X1 | 30 |
| LPC4670X2 | 30 |
| LPC467X1 | 30 |
| LPC467X2 | 30 |
| LPC468 | 31 |
| LPC475 | 31 |
| LPC477 | 31 |
| LPC478 | 31 |
| LPC48034LG | 31 |
| LPC48034SH | 31 |
| LPC48058LG | 31 |
| LPC48058SH | 31 |
| LPC481LG | 31 |
| LPC481SH | 31 |
| LPC482LG | 32 |
| LPC482SH | 32 |
| LPC483 | 32 |
| LPC48412 | 32 |
| LPC49234 | 32 |
| LPC49258 | 32 |
| LPC501 | 34 |
| LPC502 | 34 |
| LPC502A | 34 |
| LPC502L | 34 |
| LPC503 | 34 |
| LPC505 | 34 |
| LPC508L | 34 |
| LPC510 | 34 |
| LPC510L | 34 |
| LPC513 | 34 |
| LPC513L | 34 |
| LPC516 | 35 |
| LPC516A | 35 |
| LPC517 | 35 |
| LPC517L | 35 |
| LPC527 | 35 |
| LPC528 | 35 |
| LPC532 | 35 |
| LPC532L | 35 |

| LPC533 35 LPC535 35 LPC535L 35 LPC536 35 LPC537 35 LPC537L 35 LPC540 35 LPC540A 35 LPC55112 36 LPC55138 36 LPC55112 36 LPC5512 36 LPC55312 36 LPC55314 36 LPC5531 36 LPC5531 36 LPC553 36 LPC554 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC571 37 LPC580 37 LPC588 38 LPC5962 37 <th>Part Number</th> <th>Page</th> | Part Number | Page |
|--|-------------|------|
| LPC535L LPC536L S5 LPC537 S5 LPC537 S5 LPC537L S5 LPC540 S5 LPC540A S5 LPC55112 S6 LPC55112 S6 LPC551138 S6 LPC55314 S6 LPC55314 S6 LPC55314 S6 LPC553L14 S6 LPC553L14 S6 LPC554L S6 LPC555 S6 LPC555L S6 LPC557 S6 LPC557 S6 LPC559 S6 LPC570 S7 LPC570 S7 LPC570 S7 LPC580 S7 LPC596 S8 LPC596 S7 LPC5963 S7 LPC5963 S7 LPC5966 S7 LPC61012 LPC6101 | LPC533 | |
| LPC535L LPC536 LPC537 35 LPC537 35 LPC540 35 LPC540A 35 LPC540L 35 LPC55112 36 LPC55112 36 LPC551138 36 LPC55312 36 LPC55314 36 LPC55338 36 LPC55314 36 LPC553L12 36 LPC553L14 36 LPC555L 36 LPC555L 36 LPC554 36 LPC554 36 LPC555 36 LPC557 36 LPC557 36 LPC557 36 LPC559 36 LPC559 36 LPC570 37 LPC570L 37 LPC570L 37 LPC570L 37 LPC580 37 LPC588 38 LPC596 38 LPC5963 37 LPC5963 37 LPC5964 37 LPC5966 37 | LPC533L | 35 |
| LPC536 LPC537 LPC537 LPC537 LPC540 S5 LPC540 S5 LPC540A S5 LPC55112 S6 LPC55112 S6 LPC551138 S6 LPC55114 S6 LPC55314 S6 LPC55314 S6 LPC55314 S6 LPC55314 S6 LPC553L14 S6 LPC553L14 S6 LPC555L S6 LPC554 S6 LPC555 S6 LPC555 S6 LPC557 S6 LPC557 S6 LPC557 S6 LPC559 S6 LPC570 S7 LPC570 S7 LPC570 S7 LPC571 S7 LPC571 S7 LPC580 S7 LPC596 S8 LPC596 S7 LPC5963 S7 LPC5964 S7 LPC5966 S7 | LPC535 | 35 |
| LPC537 | LPC535L | 35 |
| LPC537L LPC540 LPC540A 35 LPC540L 35 LPC55112 36 LPC55112 36 LPC551L12 36 LPC551L12 36 LPC55312 36 LPC55314 36 LPC55338 36 LPC55314 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC555L 36 LPC555L 36 LPC554 36 LPC555L 36 LPC555L 36 LPC557 36 LPC557 36 LPC557 36 LPC557 36 LPC559 36 LPC559 36 LPC570 37 LPC570 37 LPC570L 37 LPC571L 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5963 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC5961012 40 LPC61012 40 | LPC536 | 35 |
| LPC540 | LPC537 | 35 |
| LPC540A 35 LPC540L 35 LPC55112 36 LPC55138 36 LPC551L12 36 LPC551L12 36 LPC55312 36 LPC55314 36 LPC55314 36 LPC55314 36 LPC553L12 36 LPC553L14 36 LPC553L14 36 LPC554 36 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570L 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC588 38 LPC596 37 LPC5964 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC5961 40 LPC5966 37 LPC5961 40 LPC5966 37 LPC5961 40 LPC5961 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC5961 40 LPC5966 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC5961 40 LPC61012 40 | LPC537L | 35 |
| LPC540L 35 LPC55112 36 LPC55138 36 LPC551L12 36 LPC551L2 36 LPC55312 36 LPC55314 36 LPC55314 36 LPC5532 36 LPC553L12 36 LPC553L12 36 LPC553L14 36 LPC553L14 36 LPC554 36 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570 37 LPC570L 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC5962 37 LPC5964 37 LPC5966 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC540 | 35 |
| LPC55112 36 LPC55138 36 LPC551L12 36 LPC551L38 36 LPC55312 36 LPC55314 36 LPC55338 36 LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC555 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC559 36 LPC570 37 LPC570 37 LPC570 37 LPC570 37 LPC571 37 LPC571 37 LPC571 37 LPC571 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5963 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC540A | 35 |
| LPC55138 LPC551L12 LPC551L38 LPC55312 36 LPC55314 36 LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC553L38 36 LPC554 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570 LPC570 LPC571 LPC571 LPC580 37 LPC588 LPC596 LPC5963 LPC5963 LPC5964 LPC5966 37 LPC5966 37 LPC5966 37 LPC5966 37 LPC61012 40 LPC61012 40 LPC61038 | LPC540L | 35 |
| LPC551L12 36 LPC551L38 36 LPC55312 36 LPC55314 36 LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570 37 LPC570 37 LPC570 37 LPC570 37 LPC570 37 LPC571 37 LPC571 37 LPC580 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5964 37 LPC5966 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC55112 | 36 |
| LPC551L38 36 LPC55312 36 LPC55314 36 LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570 37 LPC570 37 LPC571 37 LPC571 37 LPC571 37 LPC571 37 LPC571 37 LPC571 37 LPC5963 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC55138 | 36 |
| LPC55312 36 LPC55314 36 LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC571L 37 LPC571 37 LPC580 37 LPC588 38 LPC596 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC551L12 | 36 |
| LPC55314 36 LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC555 36 LPC555 36 LPC557 36 LPC557 36 LPC559 36 LPC590 37 LPC571 37 LPC571 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5964 37 LPC5966 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC551L38 | 36 |
| LPC55338 36 LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC555L 36 LPC555L 36 LPC557 36 LPC557 36 LPC559 36 LPC570 37 LPC570 37 LPC570L 37 LPC571 37 LPC571 37 LPC571 37 LPC571 37 LPC571 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC55312 | 36 |
| LPC553L12 36 LPC553L14 36 LPC553L38 36 LPC554 36 LPC555L 36 LPC555L 36 LPC557 36 LPC557 36 LPC559 36 LPC559 36 LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC55314 | 36 |
| LPC553L14 36 LPC553L38 36 LPC554 36 LPC554L 36 LPC555 36 LPC555L 36 LPC557 36 LPC557L 36 LPC559 36 LPC559L 36 LPC570L 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61012 40 | LPC55338 | 36 |
| LPC553L38 36 LPC554 36 LPC554L 36 LPC555 36 LPC555L 36 LPC557 36 LPC557L 36 LPC559 36 LPC559L 36 LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC588 38 LPC590 38 LPC595 38 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC553L12 | 36 |
| LPC554L 36 LPC555L 36 LPC555L 36 LPC557 36 LPC557 36 LPC559 36 LPC559 36 LPC570 37 LPC570L 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC553L14 | 36 |
| LPC554L 36 LPC555 36 LPC555L 36 LPC557 36 LPC557L 36 LPC559L 36 LPC559 36 LPC570L 37 LPC570L 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC596 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC553L38 | 36 |
| LPC555 36 LPC555L 36 LPC557 36 LPC557 36 LPC559 36 LPC559 36 LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580 37 LPC580 37 LPC588 38 LPC596 38 LPC596 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC554 | 36 |
| LPC555L 36 LPC557 36 LPC557L 36 LPC559 36 LPC559L 36 LPC570 37 LPC570L 37 LPC571 37 LPC571L 37 LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC554L | 36 |
| LPC557 36 LPC557L 36 LPC559 36 LPC559L 36 LPC570 37 LPC570L 37 LPC571 37 LPC571L 37 LPC580 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC555 | 36 |
| LPC557L 36 LPC559 36 LPC559L 36 LPC570 37 LPC570L 37 LPC571 37 LPC571L 37 LPC580 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC555L | 36 |
| LPC559 36 LPC559L 36 LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 46 | LPC557 | 36 |
| LPC559L 36 LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC557L | 36 |
| LPC570 37 LPC570L 37 LPC571L 37 LPC571L 37 LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC559 | 36 |
| LPC570L 37 LPC571 37 LPC571L 37 LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC559L | 36 |
| LPC571 37 LPC571L 37 LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC570 | 37 |
| LPC571L 37 LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC570L | 37 |
| LPC580 37 LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC571 | 37 |
| LPC580L 37 LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC571L | 37 |
| LPC588 38 LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC580 | 37 |
| LPC590 38 LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC580L | 37 |
| LPC595 38 LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC588 | 38 |
| LPC5962 37 LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC590 | 38 |
| LPC5963 37 LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC595 | 38 |
| LPC5964 37 LPC5966 37 LPC61012 40 LPC61038 40 | LPC5962 | 37 |
| LPC5966 37 LPC61012 40 LPC61038 40 | LPC5963 | 37 |
| LPC61012 40 LPC61038 40 | LPC5964 | 37 |
| LPC61038 40 | LPC5966 | 37 |
| | LPC61012 | 40 |
| LPC61058 40 | LPC61038 | 40 |
| | LPC61058 | 40 |

| Part Number | Page |
|--------------|------|
| LPC610BI12 | 40 |
| LPC610BI38 | 40 |
| LPC610BI58 | 40 |
| LPC619 | 40 |
| LPC619A | 40 |
| LPC620 | 40 |
| LPC620A | 40 |
| LPC621 | 40 |
| LPC621A | 40 |
| LPC622 | 40 |
| LPC622A | 40 |
| LPC62412 | 41 |
| LPC62438 | 41 |
| LPC62458 | 41 |
| LPC624A12 | 41 |
| LPC624A58 | 41 |
| LPC62612 | 41 |
| LPC62638 | 41 |
| LPC62658 | 41 |
| LPC626A12 | 41 |
| LPC626A58 | 41 |
| LPC62812 | 41 |
| LPC62838 | 41 |
| LPC62858 | 41 |
| LPC628A12 | 41 |
| LPC628A58 | 41 |
| LPC664 | 41 |
| LPC66418 | 41 |
| LPC66424 | 41 |
| LPC664A | 41 |
| LPC664A18 | 41 |
| LPC664A24 | 41 |
| LPC664BI | 41 |
| LPC664L | 41 |
| LPC66518 | 41 |
| LPC66518NC | 41 |
| LPC66518NCBI | 41 |
| LPC66518BI | 41 |
| LPC66524 | 41 |
| LPC66524BI | 41 |
| LPC66524NC | 41 |
| LPC66524NCBI | 41 |
| LPC669 | 26 |
| LPC670 | 26 |

| Part Number | Page |
|-------------|------|
| LPC671 | 26 |
| LPC672 | 26 |
| LPC673 | 26 |
| LPC674 | 26 |
| LPC675 | 26 |
| LPC676 | 26 |
| LPC677 | 26 |
| LPC678 | 26 |
| LPC680 | 44 |
| LPC681 | 44 |
| LPC682 | 44 |
| LPC700 | 47 |
| LPC702 | 47 |
| LPC704 | 47 |
| LPC706 | 47 |
| LPC711 | 47 |
| LPC750 | 45 |
| LPC751 | 45 |
| LPC752 | 45 |
| LPC753 | 45 |
| LPC754 | 45 |
| LPC755 | 45 |
| LPC790 | 45 |
| LPC795 | 45 |
| LPC801 | 54 |
| LPC802 | 54 |
| LPC803 | 54 |
| LPC804 | 54 |
| LPC805 | 54 |
| LPC805L | 54 |
| LPC806 | 54 |
| LPC807 | 54 |
| LPC808 | 54 |
| LPC809 | 54 |
| LPC809L | 54 |
| LPC810 | 54 |
| LPC810L | 54 |
| LPC814 | 55 |
| LPC823 | 55 |
| LPC858 | 36 |
| LPC858L | 36 |
| LPCC3410NC4 | 20 |
| LPCC346NC4 | 20 |
| LPCC348NC4 | 20 |
| | |

| Part Number | Page |
|-------------|------|
| LPCC5810NC4 | 20 |
| LPCC584NC4 | 20 |
| LPCC585NC4 | 20 |
| LPCC586NC4 | 20 |
| LPCC588NC4 | 20 |
| LPG35058 | 25 |
| LPG35158 | 25 |
| LPG35258 | 25 |
| LPG35358 | 25 |
| LPG35458 | 25 |
| LPG36058 | 25 |
| LPG36158 | 25 |
| LPG36258 | 25 |
| LPG36358 | 25 |
| LPG36458 | 25 |
| LPG848 | 55 |
| LPLC401CTO | 28 |
| LPLC404CTO | 28 |
| LPLC411 | 29 |
| LPLC412 | 29 |
| LPLC413 | 29 |
| LPLC414 | 29 |
| LPLC415 | 29 |
| LPLC416 | 29 |
| LPLC417 | 29 |
| LPLC418 | 29 |
| LPLC421 | 29 |
| LPLC422 | 29 |
| LPLC423 | 29 |
| LPLC424 | 29 |
| LPLC425 | 29 |
| LPLC426 | 29 |
| LPLC427 | 29 |
| LPLC428 | 29 |
| LPLC431 | 29 |
| LPLC433 | 29 |
| LPLC435LG | 29 |
| LPLC435SH | 29 |
| LPLC436LG | 29 |
| LPLC436SH | 29 |
| LPLC437LG | 29 |
| LPLC437SH | 29 |
| LPLC441 | 30 |
| LPLC443 | 30 |
| | |

| Part Number | Page |
|-------------|--------|
| LPLC446 | 30 |
| LPLC448 | 30 |
| LPLC451 | 30 |
| LPLC464 | 30 |
| LPLC465 | 30 |
| LPLC468 | 31 |
| LPLC48034LG | 31 |
| LPLC48034SH | 31 |
| LPLC48058LG | 31 |
| LPLC48058SH | 31 |
| LPLC481LG | 31 |
| LPLC481SH | 31 |
| LPLC482LG | 32 |
| LPLC482SH | 32 |
| LPLC49234 | 32 |
| LPLC49258 | 32 |
| LPP667 | 44 |
| LPP691 | 44 |
| LPP692 | 44 |
| LPP693 | 44 |
| LPP743 | 42, 56 |
| LPP745 | 42, 56 |
| LPP74718 | 42, 56 |
| LPP74728 | 42, 56 |
| LPP899BK | 55 |
| LPP899GY | 55 |
| LPP899WH | 55 |
| LPP899WH28 | 55 |
| LPS272CTO | 19 |
| LPS273CTO | 19 |
| LPS411 | 29 |
| LPS412 | 29 |
| LPS413 | 29 |
| LPS414 | 29 |
| LPS415 | 29 |
| LPS416 | 29 |
| LPS417 | 29 |
| LPS418 | 29 |
| LPS421 | 29 |
| LPS422 | 29 |
| LPS423 | 29 |
| LPS424 | 29 |
| LPS425 | 29 |
| LPS426 | 29 |
| | |

| Part Number | Page |
|-------------|------|
| LPS427 | 29 |
| LPS428 | 29 |
| LPS451 | 30 |
| LPS456 | 30 |
| LPS469 | 31 |
| LPS661CTO | 41 |
| LPS66218 | 41 |
| LPS66212 | 41 |
| LPS662CTO | 41 |
| LPS663CTO | 41 |
| LPS815 | 55 |
| PC318L12 | 23 |
| PC318L38 | 23 |
| PC318L58 | 23 |
| PLUSCU | 52 |
| PTC2Q8C | 51 |
| PTC8C1V | 51 |
| PTC8C8C | 51 |
| PTC8D8D | 51 |
| SSC8C | 51 |
| SSC8D | 51 |
| T111 | 52 |
| T313 | 52 |
| T314 | 52 |
| T320 | 52 |
| T321 | 52 |
| T394 | 52 |
| T403 | 52 |
| T416B | 48 |
| T416BH | 48 |
| T416C | 48 |
| TAC2Q8C | 50 |
| TAC2Q8D | 50 |
| TAC2Q8G | 50 |
| TAC8C8C | 50 |
| TAC8D8C | 50 |
| TAC8D8D | 50 |
| TAC8G8G | 50 |
| VFC8C | 51 |
| VSC8C | 51 |
| VSC8D | 51 |
| XLL160 | 52 |
| | |



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER



nVent.com/ERICO

WARNING: n/Vent products shall be installed and used only as indicated in n/Vent's product instruction sheets and training materials. Instruction sheets are available at n/Vent.com/ERICO and from your n/Vent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow n/Vent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

©2018 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners nVent reserves the right to change specifications without notice.



Grounding, Bonding and nVent ERICO Cadweld

Solutions Guide





Introduction

nVent Engineered Electrical & Fastening Solutions is a leading global manufacturer and marketer of superior engineered products for niche electrical, mechanical and concrete applications. These nVent products are sold globally under a variety of market-leading brands: nVent ERICO welded electrical connections, facility electrical protection, and rail and industrial products; nVent CADDY fixing, fastening and support products; nVent ERIFLEX low voltage power and grounding connections; and nVent LENTON engineered systems for concrete reinforcement.

For more information please visit nVent.com/ERICO.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at nVent.com/ERICO and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.



Directory

SOLUTION RESOURCES

| Facility Electrical Protection | 5-6 |
|---|---------|
| Grounding Principles | 7-13 |
| Ground System Components | 14-15 |
| nVent ERICO Hammerlock | 16-17 |
| nVent ERICO Ground Enhancement Material (GEM) | 18-20 |
| nVent ERICO Cu-Bond Composite Cable | 21 |
| nVent ERICO Cu-Bond Round Conductor | 22-23 |
| Grounding Stainless Steel Braids | 24-25 |
| nVent ERICO Cadweld | 26-38 |
| Datacom | 40-41 |
| Power Generation, Transmission & Distribution | 42-43 |
| Substation/Earthing Grounding | 44-45 |
| Solar Products | 46-47 |
| Wind Products | 48-49 |
| Telecom | 50-51 |
| Lightning Protection | 52-53 |
| CONNECTORS AND POSITIONERS | |
| Ground Rod Connectors | 56-65 |
| Structural Connectors | |
| Conductor to Conductor Connectors | 72-80 |
| Pipe, Fence and Gate Connectors | |
| Rebar Connectors | 92-94 |
| Pedestal Connectors | 95-96 |
| Positioners and Attachments | 97-99 |
| CONDUCTORS | |
| Cu-Bond Round Conductors | 102-105 |
| Cu-Bond Composite Cable | 106 |
| Non-Insulated Round Conductors | 106-107 |
| Braids and Power Shunts | 108-109 |
| Copper Tape | 110-111 |
| GROUNDING AND BONDING | |
| Ground Rods | 114-121 |
| Ground Enhancement Material (GEM) | 122 |
| | |

| Inspection Housings | 123-125 |
|--|---------|
| Ground Mats and Mesh | 126-128 |
| Signal Reference Grid | 129 |
| Ground Plates | 130-134 |
| Ground Points for Concrete | 135-138 |
| Aircraft and Static Grounding | 139-143 |
| GROUNDING BUSBARS | |
| Grounding Busbars and Supports | 146-157 |
| Intersystem Bonding Termination Bar | 158 |
| GROUNDING TOOLS | |
| Ground Rod Driving Tools | 160-163 |
| Ground Resistance Testers | 164-169 |
| CADWELD MOLDS | |
| Grounding Connection Specifications | 172-183 |
| Cable to Cable Molds | 174-184 |
| Cable to Ground Rod Splice Molds | 184-185 |
| Cable to Ground Rod or Other Rounds Molds | 185-196 |
| Cable to Cable to Ground Rod or Other Rounds Molds | 197-200 |
| Cable to Steel Molds | 200-210 |
| Cable to Lug or Busbar Molds | 211-216 |
| Busbar to Busbar Molds | 217-219 |
| Lug to Busbar or Steel Molds | 220-221 |
| Cable to Rebar Molds | 221-229 |
| Cable to Ground Receptacle or Ground Plate Molds | 229-231 |
| Copper or Steel Stud to Steel Surface Molds | 232 |
| Additional Molds | 233-236 |
| CADWELD WELDING MATERIAL, TOOLS AND ACCESSORIES | |
| Welding Materials | 238-239 |
| Cadweld One Shot | 240-242 |
| Lugs | 242-247 |
| Clamping and Clamping Tools | 248-254 |
| Disks, Sleeves, Shims and Batting | 255-260 |
| Tools & Accessories | 261 |
| Hammer Die | 262 |
| Ignition Systems | 263-265 |
| Cleaning Tools | 266-267 |
| Hand Tools | |
| Safety Equipment | 270-271 |
| TECHNICAL CHARTS | |
| Technical Charts | 274-276 |
| INDEX | |
| Index | 277-287 |

Facility Electrical Protection for the 21st Century

Lightning strikes and the dangerous over-voltage surges caused by lightning and man-made events represent a direct threat to people, buildings and sensitive electronic equipment.

Today, the consequences of an unexpected lightning strike or power surge can be catastrophic for a company. Proper protection can save thousands of dollars in damage, operational downtime and lost business opportunities.

TOTAL FACILITY PROTECTION

The consequences of an unexpected lightning strike or power surge can be catastrophic for a facility:

- · Personnel are at risk.
- · Critical equipment may be damaged or destroyed.
- · Data can be corrupted.
- The costs of operational downtime and lost revenue can be very substantial.

As industries become more dependent on increasingly sensitive equipment, proper protection from lightning and dangerous overvoltage transients is necessary.

With over 60 years of research, testing and product development, nVent ERICO has acknowledged that no single technology can totally eliminate vulnerability to lightning and surges.

The nVent ERICO Six Point Plan of Protection is designed to provide total facility protection by integrating several concepts. The Six Point Plan will minimize the risk of damage to facilities through:

- · Direct Strike Protection
- · Grounding and Bonding
- Surge and Over-voltage Transient Protection

THE SIX POINT PLAN OF PROTECTION

Capture the lightning strike.

Capture the lightning strike to a known and preferred attachment point using a purpose-designed air terminal system.

Convey this energy to ground.

Conduct the energy to the ground via a purpose-designed downconductor.

Dissipate energy into the grounding system.

Dissipate energy into a low impedance grounding system.

Bond all ground points together.


Bond all ground points to eliminate ground loops and create an equipotential plane.

Protect incoming AC power feeders.

Protect equipment from surges and transients on incoming power lines to prevent equipment damage and costly operational downtime.

Protect low voltage data/telecommunications circuits.

Protect equipment from surges and transients on incoming telecommunications and signal lines to prevent equipment damage and costly operational downtime.

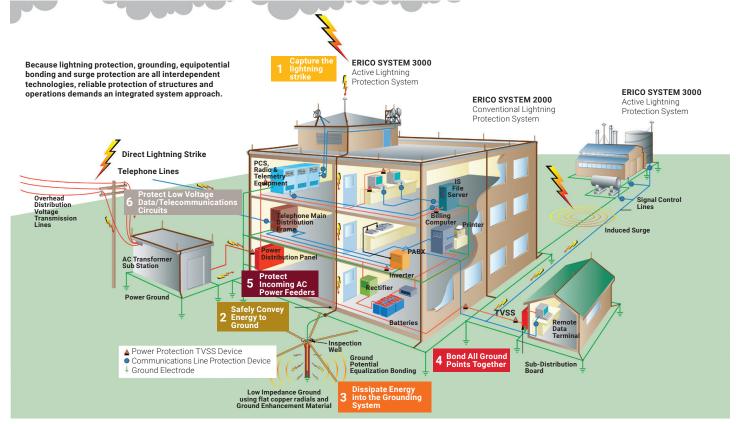

nVent ERICO is a leading global designer, manufacturer and marketer of precision-engineered specialty metal products serving niche markets in a diverse range of electrical, construction, utility and rail applications. The company is headquartered in Solon, Ohio, USA with a network of sales locations serving more than 25 countries and with manufacturing and distribution facilities

worldwide. nVent ERICO's well-known brand names include: nVent CADDY electrical and mechanical fixings, fasteners and supports; Cadweld welded electrical connections; surge protection devices; rail and industrial products; ERIFLEX low voltage power distribution; facility electrical protection; and nVent LENTON concrete products. Visit nVent ERICO online at nVent.com/ERICO.


Facility Electrical Protection for the 21st Century

DIRECT STRIKE PROTECTION

nVent ERICO's innovative technology provides two systems for capturing lightning energy. The nVent ERICO System 2000 provides conventional air terminal technology to meet traditional needs.


An alternative approach to lightning protection is the nVent ERICO System 3000, which utilizes the collection volume principle to determine the effective placement of lightning protection to ensure the safe conveyance and dissipation of the lightning energy into the ground.


Over 7000 facilities, including some of the tallest and most vulnerable buildings in the world, are protected by System 3000.



- · Well known technology of passive rods or air terminals, familiar to installers
- · Air terminals available in aluminum, copper and stainless
- IEC®, B.S., and U.S. Standard Compliant
- Precision manufacturing helps ensure easy assembly and installation
- Computer-aided design to IEC62305, NFPA®-780, AS/NZS1768








- Advanced lightning protection system based on latest lightning research and technology
- Enhanced area of protection, fewer air terminals needed
- · Economical and easy to install
- · Fewer downconductors are required
- · Designed to protect all types of structures and "open areas"
- · Computer-aided design using Collection Volume method





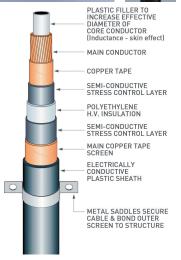

GROUNDING AND BONDING


For the efficient performance of a lightning protection system, it is essential that a low impedance ground be provided to facilitate the dissipation of the lightning energy into the earth mass.


Because soil conditions and seasonal patterns vary from site to site, the methods of grounding need to be considered on an individual basis.

As a grounding specialist, nVent ERICO provides a range of grounding systems to suit any application.




NVENT ERICO CADWELD PLUS

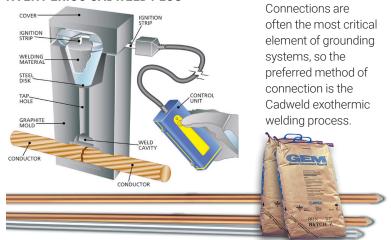

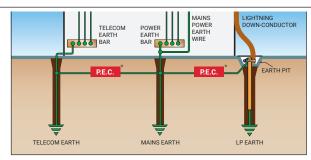

nVent ERICO offers a variety of products, such as ground bars, signal reference grids, ground plates and potential equalization clamps, which are designed to create an equipotential plane and help protect personnel and valuable equipment. Cadweld copper-bonded or stainless steel earth rods and GEM facilitate the transfer of surges and fault currents into the earth, and provide a very long service life due to superior construction and quality.



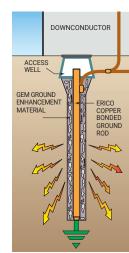

Grounding Principles



INTRODUCTION

Grounding and bonding are an integral part of any modern electrical protection system design. An effective, low-impedance ground system is a key element of this system.

It is crucial to help provide personnel safety, as well as reliable protection for vital equipment and to minimize interruptions of service and costly downtime.

With over a century of experience in the design and manufacture of bonding and grounding products, nVent ERICO, a single source provider, offers what we believe is the best range of long lasting and cost-effective grounding products available.

Soil conditions and seasonal patterns vary from site to site, the methods of grounding need to be considered on an individual basis.

BASIC DEFINITIONS

Ground: A conducting connection, whether intentional or accidental, between an electrical circuit or equipment and the earth, or to some conducting body that serves in place of the earth

Earth: The conductive mass of the earth, whose electric potential at any point is conventionally taken as equal to zero. (In some countries the term "ground" is used instead of "earth.")

Bonding: The permanent joining of metallic parts to form an electrically conductive path that will ensure electrical continuity and the capacity to conduct any current likely to be imposed.

THE NEED TO GROUND!

There are important reasons why a grounding system should be installed.

- 1. The most important reason is to help protect people!
- 2. To help provide protection of structures and equipment from unintentional contact with live conductors.
- 3. To help support maximum safety from electrical system faults and lightning.

It is a fundamental fact that electricity ALWAYS flows to the point of lowest potential. The task is to help ensure that electricity, including faults, lightning and electronic noise, flows to this point with maximum safety to people, while maintaining the reliability of equipment. Therefore we must help ensure the safe, controlled flow of electricity with minimum voltage drop to earth in all cases.

GROUNDING CODES AND STANDARDS

Grounding needs vary according to function. The grounding requirements of a power system will vary from those of electrical equipment, lightning protection or for the proper function of electronic equipment.

Proper installation of appropriate grounding systems requires knowledge of the needs and layout of the facility. Soil characteristics, grounding conductor materials grounding connections and terminations, are significant factors determining the design of a grounding system. Applicable standards and codes must be applied.

While many codes and standards contain minimum grounding and bonding requirements, the design and installation of electrical grounding systems is one of the most important aspects of any electrical distribution system. However, codes and standards are often misunderstood and grounding systems subsequently installed improperly.

Grounding Principles

WHY IS GOOD GROUNDING IMPORTANT?

The transient nature of lightning with its associated fast rise times and large magnitude currents mean that special consideration needs to be given to grounding, for lightning protection to be effective. Many factors such as soil resistivity variations, installation accessibility, layout and existing physical features are all site specific and tend to affect decisions on grounding methods employed. The primary aim of a direct strike grounding system is to:

- Efficiently dissipate lightning energy into the ground
- · Help protect equipment and personnel

GROUNDING PRINCIPLES

Low impedance is the key to lightning protection. All grounding connections should be as short and direct as possible to minimize inductance and reduce peak voltages induced in the connections. The ground electrode system must efficiently couple lightning surges into the ground by maximizing capacitive coupling to the soil. The resistance of the ground itself to lightning currents must also be minimized. Only when all these factors are taken into account will maximum lightning protection be achieved.

GROUND IMPEDANCE


Soil resistivity is an important design consideration. It varies markedly for different soil types, moisture content and temperatures and gives rise to variations in ground impedances.

SHORT, DIRECT GROUND CONNECTIONS

The voltage generated by a lightning discharge depends primarily on the risetime of the current and the impedance (primarily inductance) of the path to ground. Extremely fast rise times result in significant voltage rises due to any series inductance resulting from long, indirect paths, or sharp bends in the routing of ground conductors. This is why short, direct ground connections are important.

COUPLING FROM THE ELECTRODE SYSTEM TO THE GROUND

The efficiency of a ground electrode system in coupling a lightning current to ground is dependent on a number of factors, including the geometry of the ground electrode system, the shape of the conductors and the effective coupling into the soil.

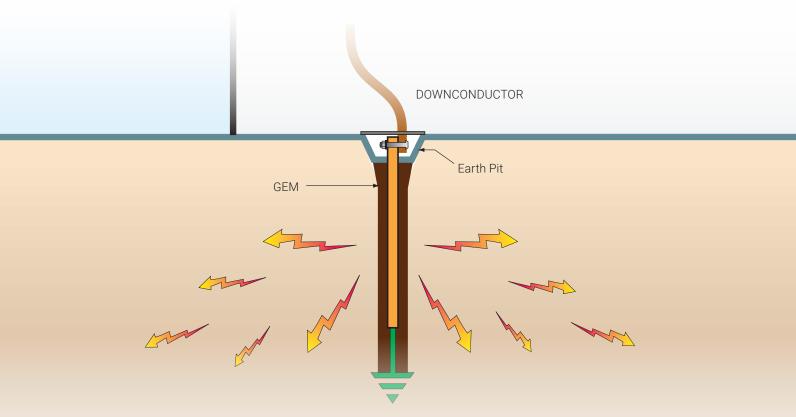

A typical grounding system.

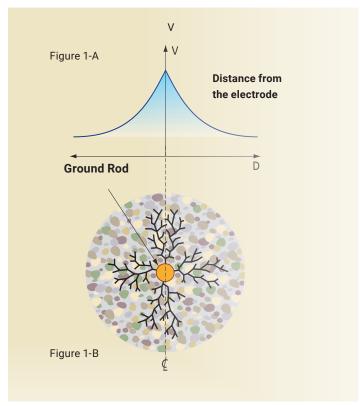


Figure 1-B illustrates current flow from the injection point of a single ground electrode. As current flows out from the central injection point, a voltage gradient on the ground surface around the electrode is produced. This gradient levels off to a plateau at some distance from the electrode, as seen in Figure 1-A. The impedance seen by the current is determined by the soil particles in direct contact with the surface of the rod, and by the general impedance of the soil.

- · Good electrical conductivity
- · Conductors capable of withstanding available electrical fault currents
- · Long life at least 40 years
- · Low ground resistance and impedance

The basic philosophy of any grounding installation should be an attempt to maximize the surface area of electrodes or conductors with the surrounding soil. Not only does this help to lower the earth resistance of the grounding system, but it also greatly improves the impedance of the grounding system under lightning surge conditions.

· Equipotential bonding

Equipotential bonding helps ensure that hazardous potential differences do not occur between different incoming conductors such as metallic water services, power systems, telecommunication systems and the local ground, and also minimizes step and touch potentials.

· Good corrosion resistance

The ground electrode system should be corrosion resistant, and compatible with other conductors that are buried and bonded to the ground system. Copper is by far the most common material used for grounding conductors. In general, some form of maintenance or inspection procedure should be adopted to ensure the long-term effectiveness of a grounding system.

· Electrically and mechanically robust and reliable

Mechanical coupling can be used to join ground conductors. but suffers from corrosion effects when dissimilar metals are involved. As well as mechanical strength, Cadweld connections provide excellent low impedance, long life electrical connections with excellent corrosion resistance.

Ground Resistance

When current flows from a ground electrode into the surrounding soil, it is often described as flowing through a series of concentric shells of increasing diameter.

Each successive shell has a greater area for current flow and consequently, lower resistance. At some point distant from the earth conductor the current dissipation becomes so large and current density so small, that the resistance is negligible.

In theory, the ground resistance may be derived from the general formula:

R = P
$$\frac{L}{A}$$
Resistance = Resistivity x $\frac{Length}{Area}$

This formula illustrates why the shells of concentric earth decrease in resistance the farther they are from the ground rod:

R = Resistivity of Soil x Thickness of Shell Area

In the case of ground resistance, uniform earth (or soil) resistivity throughout the volume is assumed, although this is seldom the case in nature. The equations for systems of electrodes are very complex and often expressed only as approximations. The most commonly used formula for single ground electrode systems, developed by Professor H.R. Dwight of the Massachusetts Institute of Technology, is the following:

$$R = P \frac{\rho}{2\pi L} \qquad \frac{\{(\ln 4L) - 1\}}{r}$$

R = resistance in ohms of the ground rod to the earth (or soil)

L = grounding electrode length

r = grounding electrode radius

ρ = average resistivity in ohms-cm.

CONDITIONS INFLUENCING SOIL RESISTIVITY


The resistance of the earth itself (soil resistivity) can significantly impact the overall impedance of the grounding system. Several factors, such as soil composition, moisture content, mineral content, contaminants, etc., determine the overall resistivity of the earth.

| | Resistivity ohm-cm | | | | |
|--|--------------------|--------|---------|--|--|
| SOIL TYPE | Average | Min. | Max. | | |
| Fills – ashes, cinders, brine wastes | 2,370 | 590 | 7,000 | | |
| Clay, shale, gumbo, loam | 4,060 | 340 | 16,300 | | |
| Clay, shale, gumbo, loam with varying proportions of sand and gravel | 15,800 | 1,020 | 135,000 | | |
| Gravel, sand, stones, with little clay or loam | 94,000 | 59,000 | 458,000 | | |


U.S. Bureau of Standards Technical Report 108

SOIL RESISTIVITY TESTING

To properly design a grounding system, it is essential to test soil resistivity. Several methods can he used to measure earth resistivity: the four-point method, the variation in-depth method (three-point method) and the two-point method. The most accurate method and the one that nVent ERICO recommends is the four-point method.

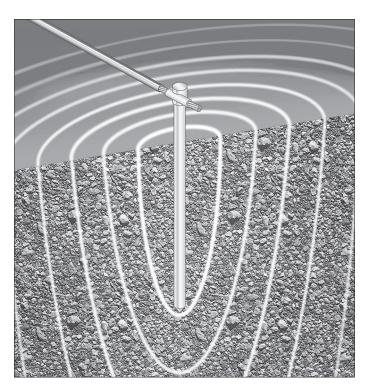

Sphere of Influence - electrical current flows from the ground rod into surrounding soil and progressively dissipates in waves of increasing diameter.

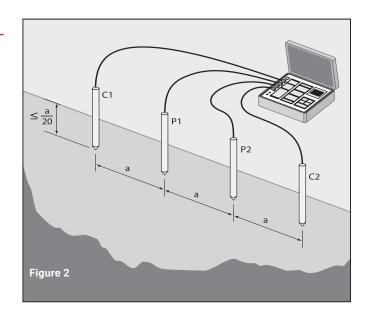

THE FOUR-POINT METHOD

- Four test stakes are positioned in a straight line an equal distance apart and are hammered into the ground to be surveyed to a depth of not more than 1/20 the distance between the adjacent stakes.
- 2. An earth resistance tester is connected to these four stakes as shown in Figure 2.
- 3. The DC test option on the tester is then selected and performed, and the resistance figure "R" recorded.
- 4. The soil resistivity level "r" (in ohms/cm) is then calculated using the formula: r=2paR where:

R = the resistance figure, in ohms

a = the separation of the test stakes, in meters.

p =
$$\frac{4\pi AR}{\frac{1+2A}{\sqrt{(A2+4B2)}} - \frac{2A}{\sqrt{(A2+4B2)}}}$$

Where:

A = distance between the electrodes in centimeters

B = electrode depth in centimeters

If A > 20 B, the formula becomes:

 $p = 2\pi AR$ (with A in cm)

p = 191.5 AR(with A in feet)

p = Soil resistivity (ohm-cm)

This value is average resistivity of the ground at a depth equivalent to the distance "A" between two electrodes.



Step Potential


Step Potential is the voltage difference between a person's feet caused by the dissipation gradient of a fault entering the earth.

Touch Potential

Touch Potential is similar to "Step Potential" except that the fault current passes through the person's arm and torso on the way to the ground.

Another function of the grounding system is to provide a reference for circuit conductors to stabilize their voltage to ground during normal operation. The earth itself is not essential to provide a reference function; another suitable inductive body may be used instead.

The function of a grounding electrode system and a ground terminal is to provide a system of conductors, which ensures electrical contact with the earth.

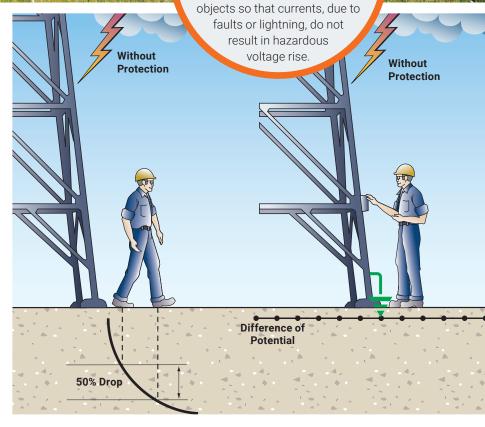

GROUNDING / EARTHING SYSTEM DESIGN

Grounding systems are important. It is not expensive to build an appropriate ground system during initial construction of a facility, but it can be very expensive to add to it, enhance it, or replace it after the facility is complete. Care should be taken to design a system that is appropriate both for clearing ground faults and dissipating lightning energy. The system must have a long performance life, meet applicable codes / standards for safety, and have sufficient bonding points to make it easy to add new equipment / facility grounding to it easily.

Design considerations include:

- Purpose of facility
- · Design life of facility
- · Soil resistivity at 3 depths
- · Corrosive nature of soil
- · Shape and available area of facility site
- · Existing structures and their grounding systems
- Seasonal variations in moisture and temperature for facility site
- · Public access & personnel use
- · Adjacent facilities and electrical systems
- Future uses, additions, equipment for facility

For proper operation of overcurrent devices, it is important to have a low DC ohmic resistance to remote earth. In many instances, this is best achieved by installing a deep ground electrode on site. It should be driven deep enough to reach the permanent water table.

For dissipation of direct or indirect lightning currents, it is better to have many horizontal ground conductors in the soil, preferably in a radial array. This provides a low impedance path of dissipation to the high frequency component of the lightning energy.

equipment operators will be located, it is important to have a grid system or other equipotential plane to reduce "step potential" and have equipment and metal structures bonded to the ground system to reduce "touch potential".

A proper facility grounding system incorporates these necessities in the most cost-effective manner that will last for the design life of the facility.

nVent ERICO is a manufacturer and marketer of grounding, bonding, lightning protection and surge protection products and systems. nVent ERICO has many knowledgeable and experienced engineers on staff with the training and the tools (including some of the latest design software) to design appropriate grounding systems. These engineers can assist facility owners, engineers and contractors in designing the most appropriate system for the facility in question.

Grounding Chain

- 1. Grounding Electrode Conductor
- **Grounding Connections**
- Grounding Electrode
- Electrode to Soil Resistance
- Soil




THE GROUNDING CHAIN

The performance of the grounding system is determined by the quality of the following five components all of which are of equal importance.

- 1. **The Grounding Electrode Conductor.** Typically made from copper or copper-bonded steel, the grounding electrode conductor must be large enough to withstand the maximum available fault current over the maximum clearing time.
- 2. **The Grounding Connections.** Often overlooked, the grounding connections are used to tie the elements of the electrode system together. Exothermically welded connections provide a molecular bond that will never loosen or corrode. Mechanical connectors, such as crimp, bolted, and wedge type, rely on physical point-to-point surface contact to maintain the integrity of the electrical connection. IEEE® Standard 837-2014 provides detailed information on the application and testing of permanent grounding connections. nVent ERICO can provide an independent, third-party test report evaluating the performance of these connectors in accordance with the testing procedures set forth in IEEE Standard 837-2014 Standard for Qualifying Permanent Substation Grounding Connections.
- 3. The Grounding Electrode. The grounding electrode provides the physical connection to the earth and is the instrument used to dissipate current into it. There are two main types of electrodes. "Natural" electrodes are intrinsic to the facility and include metal underground water pipe, the metal frame of the building (if effectively grounded), and reinforcing bar in concrete foundations. "Made" electrodes are installed specifically to improve the performance of the ground system and include wire meshes, metallic plates, buried copper conductor and rods or pipes driven into the ground. The ground rod is the most widely used electrode.
- **Electrode to Soil Resistance.** Amount of rod surface and rod replacement are the controlling factors. Doubling diameter reduces resistance by only 10% and is not cost effective. Doubling rod length, however, theoretically reduces resistance by 40%. The most common solution is proper placement of multiple rods that are driven to the required depths.
- 5. **The Soil.** The soil resistivity, measured in ohm-centimeters or ohm-meters, plays a significant role in determining the overall performance of the grounding system and must be known before a proper grounding system can be engineered. Measuring soil resistivity allows the design engineer to locate an area with the most conductive soil and to determine the depth of the conductive soil so that electrodes can be placed accordingly.



The grounding system will carry little or no current for long periods of time until a fault occurs or a lightning strike or other transient requires dissipation. At that point, the grounding system components will be expected to perform like new while conducting large amounts of current. Most of the grounding system is concealed below grade, making inspection of the grounding components difficult or impossible. The underground environment is a harsh one. The initial selection of the components used in the grounding system is of critical importance to its long-term effectiveness.

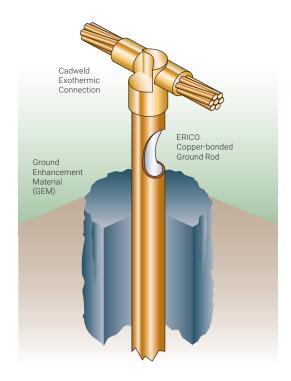


Ground System Components

GROUND ELECTRODES

The ground electrode is a critical component of the grounding system. Many different types of electrodes are available, some "natural" and some "made". The natural types include metal underground water pipe, the metal frame of a building (if effectively grounded), a copper wire or reinforcing bar in a concrete foundation or underground structures or systems. Consideration should be given

to bonding of natural earths to ensure electrical continuity with a facility's other "earths".

"Made" electrodes are specifically installed to improve the system grounding or earthing. These earth electrodes must ideally penetrate into the moisture level below the ground level to reduce resistance. They must also consist of metal conductors (or a combination of metal conductor types), which do not corrode excessively for the period of time they are expected to serve. Made electrodes include rods or pipes driven into the earth, metallic plates buried in the earth or a copper wire ring encircling the structure. Underground gas piping or aluminum electrodes are NOT permitted for use as ground electrodes.

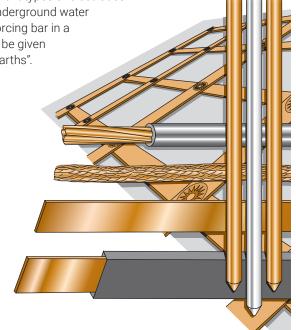

GROUND RODS - WHICH GROUND ROD SHOULD BE USED?

Ground rods are often selected on the basis of their resistance to corrosion. The other major factor is cost. All too often, the cost of a product is seen as the initial up front price, but the real cost is determined by the serviceable life of the ground rod.

Galvanized steel rods are one of the cheapest electrodes available. However, they are not the most cost effective since they have a relatively short service life. Solid copper and stainless steel rods have a long service life. However, they are considerably more expensive than galvanized steel rods. In addition to this, solid copper rods are not suited to deep driving or even driving short lengths into hard ground, without bending.

Ask for the nVent ERICO White Paper on Ground Rods - Copperbonded vs. Galvanized.



The photo shows two ground rods subjected to the same pressure load test. The nVent ERICO copper-bonded ground rod, shown on the left, will bend without tears, cracks or folds, to the outer sheath. The inferior copperclad rod shown on the right, has developed cracks and creases to the outer sheath, which will significantly reduce its serviceable life and put the integrity of the entire electrode at risk.

Cost-effective long service life Copper-bonded coating: · Permanent molecular hond · Low resistance performance High fault current capacity (IEEE® Std 80) · Will not slip or tear when driven · Will not crack if rod is bent · Copper coating may vary to meet required standards • 10 mil (254 micron) minimum coating on rods listed to UL® 467 Carbon Steel core and tip*:

Copper-Bonded Ground Rod

· Lower purchase price - not as cost-effective over the expected life as Copperbonded

Galvanized Ground Rod

Galvanized coating:

- · Relatively short service life
- · May crack if rod is bent

3.9 mil (99 micron) minimum coating per ASTM® 123

and galvanized rods

· Greater tensile strength * ERICO copper-bonded · Deep driving capability

Ground System Components



COPPER-BONDED GROUND ROD

The copper-bonded ground rod has an electrolytic coating of copper deposited over a layer of nickel. This process ensures a long lasting, molecular bond between the copper layer and the steel core. nVent ERICO recommends copper-bonded ground rods because the copper coating will not slip or tear when driven, nor will it crack if the rod is bent. The tough, carbon steel core has good characteristics for deep driving. Copper-bonded ground rods have a high resistance to corrosion and provide a low resistance path to ground.



THE STAINLESS STEEL GROUND ROD OPTION

It is important to note that certain soils and land fill areas may not be compatible with copper. In these situations, stainless steel is a better proposition. Stainless steel may also be an alternative, where structures or components, such as steel towers, poles or lead sheathed cables are in close proximity to an array of ground electrodes. In these circumstances, consideration must be given to the consequence of galvanic corrosion. The high cost of stainless steel rods prohibits their widespread use.

NEGRP

The photo on the left shows two ground rods that were driven into the soil vertically at the Pecos testing site in Las Vegas, NV in December of 1992. The top ground rod is galvanized steel, 3/4" x 10'. Bottom ground rod is copper-bonded, 5/8" x 8'. Both ground rods were exhumed from the site in April of 2004. The loss of zinc resulted in excessive corrosion of the steel. The copper-bonded steel ground rods showed minimal corrosion.







Excavated after 12 years.

Excavated after 11 years.

The photo on the right shows a galvanized steel ground rod driven vertically into the ground at the Pawnee testing site in Las Vegas, NV. One area is reduced from a 3/4" diameter to approximately a 1/4" diameter due to extensive corrosion. The eventual failure would result in a potentially catastrophic loss of ground.

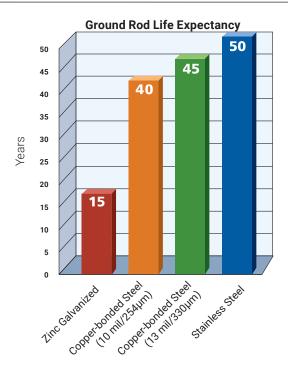

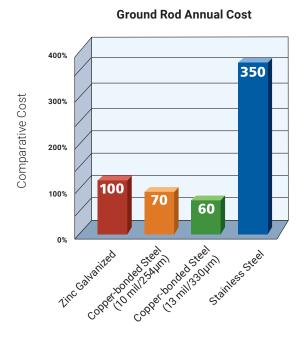

nVent ERICO Hammerlock



Hammerlock is machined from highly conductive copper.



It is easy to see why acorn clamps are more susceptible to corrosion than any other type of grounding connection.



Hammerlock cutaway.

HIGH QUALITY CONNECTIONS

The patented nVent ERICO Hammerlock grounding connector from nVent ERICO connects the grounding conductor to the ground rod. Machined from highly conductive copper, the state-ofthe-art Hammerlock provides a low-resistance connection designed to withstand ground fault currents and lightning transients. The Hammerlock connector's mechanically rugged design will help ensure that the highest level of performance is maintained for many years after the connection has been buried in the harsh underground environment. The Hammerlock is one of the quickest and easiest grounding connectors to install and requires no special tools or training. It has been engineered to be user-friendly, cost-effective, and provides a high level of protection for people and expensive equipment.

Features Include:

- Machined from 100% high-conductivity copper
- · Excellent mechanical strength
- Irreversible connection
- · Fast and simple installation requires only a hammer
- · No training required
- · Provides a visual indication of completed connection
- · Allows for "T" or pass-through connections
- UL® Listed (#2, 4 and 6 solid to 5/8" copper or galvanized rod)

The Importance of Grounding Connections

Electrical utilities and other industries are discovering significant cost benefits when highquality electrical grounding systems are installed. Many are specifying low-resistance grounds along their transmission and distribution networks. These low-resistance electrodes limit neutral-to-ground voltage, improve safety and provide better protection against lightning damage. In fact, the savings realized from reduced equipment damage and the decrease in service interruptions have prompted many utilities to undertake large-scale grounding improvement programs.

The three main components of the grounding system are the grounding connector, grounding conductor and ground rod. They are all equally important to the performance of the system. A loose or corroded connection will render the grounding system ineffective. While acorn clamps are still the connector of choice, many installers recognize the serious deficiency in their performance and the risks associated with poor-quality connections. Many acorn clamps are loose the day they are installed.

In order to install an acorn clamp effectively, it is necessary to know the proper torque level for the bolt. Since acorn clamps don't come with instructions and most crews don't have or wouldn't use a torque wrench, many are broken or installed incorrectly. The cost of replacing damaged equipment, and the labor associated with doing so, quickly puts the cost of using inferior connectors into perspective.

Installation Costs

The actual cost of the grounding connector represents only a small fraction of the total installed expense when the labor rate of the installation crew, equipment overhead costs, ground rod and conductor costs are considered. Installation costs increase significantly when deep-driven rods are used —a common practice in grounding improvement programs.

Therefore, investing in the best-performing, longest-lasting grounding connector is a wise choice. Initially paying more for a quality connector will actually save money in the long run, by reducing downtime and eliminating the need for crews to return to the site for repairs.

nVent ERICO Hammerlock

Hammerlock Is The Answer!

Acorn clamps are utilized because they are inexpensive. They were developed before the proliferation of expensive electronics, at a time when the demand for electric power was lower and before power quality was a serious consideration. The Hammerlock, on the other hand, was designed to meet the needs of today's modern grounding programs. Therefore, an upgraded or perhaps more aptly stated, updated, grounding program specification should require a quality connector and exclude the acorn clamp.

How the Hammerlock works






The ground wire is placed through the connector body and then the body is placed on the top of the ground rod. As the connector is struck with a hammer, Hammerlock is connected to the ground rod using the same compression technology used in the nVent ERICO threadless couplers that connect deepdriven rods together.

At the same time, the ground wire is locked in place as the connector plug enters the body.

Ease of Installation

Installing the Hammerlock is as easy as swinging a hammer. Its intuitive design requires no special tools or training. When the large diameter on the Hammerlock plug is flush or below the round body, the connection is complete and irreversible. The Hammerlock can be installed three to five times faster than an acorn clamp and is easier to install in a trench.

The Hammerlock provides a high-quality grounding connection that is easy to use and cost-effective — withstanding 100% of the current carrying capacity of the conductor. Given the important function of today's grounding system, the Hammerlock provides excellent connector value.

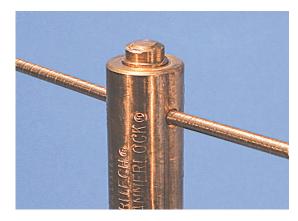

Hammerlock Specification

Cable to ground rod connectors shall be made from a round, high conductivity copper alloy bar stock, with a minimum of 90% IACS. The connector shall provide a high quality, irreversible, compression connection area for the conductor and a taper fit compression connection area for the ground rod. The connector shall be able to withstand 100% of the current carrying capacity of the conductor. The connector shall not rely on bolts or screws to maintain the integrity of the connection. Each connector shall be clearly marked with the catalog number and clear description of the conductor and ground rod to be connected and packaged with installation instructions.

A hammer shall be required for the connector installation. The connector shall provide a positive visual means of verifying a successfully completed connection. The connector shall be the Hammerlock as manufactured by nVent ERICO or approved equal. Silicon bronze connectors are not acceptable.

nVent ERICO Ground Enhancement Material (GEM)

nVent ERICO Ground Enhancement Material (GEM) is the effective, maintenance free, permanent, easy to use, and environmentally sensitive solution to your toughest grounding problems.

GEM is a low-resistance, non-corrosive, carbon-based superior conductive material that improves grounding effectiveness, especially in areas of poor conductivity such as rocky ground, mountain tops and sandy soil. GEM is also the answer in situations where ground rods can't be driven or where limited land area makes adequate grounding difficult with conventional methods.

GEM contains portland cement, which sets within 3 days and fully cures within 28 days, to become a highly conductive concrete that performs in all soil conditions irrespective of the presence of water. GEM maintains a constant level of superior performance once cured that will not diminish over the life of the grounding system.

GEM comes in easy to use 25 lb (11.3 kg) bags or buckets that one person can install. GEM is maintenance-free and will never leach or wash away. A Material Safety Data Sheet (MSDS) is available on request.

GEM is effective

- · Dramatically reduces earth resistance and impedance measurements
- Maintains constant resistance for the life of the system once in its set form
- · Performs in all soil conditions even during dry spells
- · May reduce the size of the grounding system where conventional methods are unsatisfactory

GEM is maintenance free

- · Does not require periodic charging treatments or placement
- Does not require the continuous presence of water to maintain its conductivity

GEM is permanent

- · Fully sets within 3 days, fully cures within 28 days.
- Does not dissolve, decompose or leach out with time
- · Non-corrosive
- · Reduces vandalism and theft since conductors are hard to remove from concrete

GEM is easy to use

- Easy-to-handle 25 lb (11.3 kg) bags or buckets
- · Requires one person to install

GEM is environmentally sensitive

- Exceeds IEC® 62561-7 which sets the benchmark for corrosion, leaching, sulfur content, and other environmental regulations
- · MSDS sheet available upon request

Ground Enhancement Material Conforms to IEC 62561-7

FAST AND EASY ORDERING

For more information, contact your local ERICO sales representative for a quote. You can reference the GEM part numbers.

| Part Number | Description |
|-------------|--|
| GEM25A | 25-lb. (11.3 kg) bag with handles |
| GEM25ABKT | 25-lb. (11.3 kg) plastic bucket with locking lid |



nVent ERICO Ground Enhancement Material (GEM)

DESIGN AND ESTIMATING SOFTWARE

Design software estimates the quantity of GEM needed and calculates the anticipated ground resistance on any installation. GEM software is available at nVent.com/ERICO/products/GEM.asp.


| Parameter | Recommended Values | Test Method |
|------------------------|---|--|
| Standards Compliance | | Full compliance to IEC 62561-7 EPA Toxicity Characteristic Leaching Procedure (TCLP), test method 1311 |
| Leaching | Arsenic < 1.5 mg/L, Barium < 60 mg/L, Cadmium < 0.15 mg/L, Chromium < 3.0 mg/L, Lead < 1.5 mg/L, Mercury < 0.06 mg/L, Elenium < 1.0 mg/L | EC 62561-7 EN 12457-2 |
| Sulfur Content | < 2% | ISO 14869-1 |
| Danieki vik. | <2 Ω-cm for powder | Compressed powder according to ASTM G187-12 |
| Resistivity | <20 Ω-cm for mixed and cured material | Mixed and cured per ASTM D991-89 |
| Correction Parformance | For copper-plated earth electrodes, the polarization resistance shall be $> 8~\Omega$ x m2 for aggressive environments | IEC 62561 7 See 5 5 aggregative environment |
| Corrosion Performance | For galvanized earth electrodes, the polarization resistance shall be $> 7.6\Omega$ x m ² for aggressive environments | IEC 62561-7, Sec 5.5, aggressive environment. |
| Flexural Strength | 300-450 psi [2070-3100 kPa] | ASTM C293 |
| Compressive Strength | 100-200 psi [690-1390 kPa] after 672 hours curing time | ASTM C109 |


INSTALLATION INSTRUCTIONS


Trench Installation:


- 1. Mix GEM into a slurry form by using a standard cement mixer or mix in a bucket, mixing box, wheelbarrow, etc. Use 1.5 to 2 gallons (5.7 to 7.6 liters) of clean-potable water per bag or bucket of GEM. Do not mix GEM with salt water.
- 2. Spread out enough GEM to uniformly cover bottom of trench –about 2 in (5 cm) deep. (See Table). Let the GEM harden to prevent the conductor from sinking to the bottom of the trench.
- 3. Place conductor on top of GEM. (See Note 1)
- 4. Spread more GEM on top of conductor to completely cover conductor - about 2 in (5 cm) deep. Allow GEM to harden. Wait 30 minutes to one hour before filling the trench with soil backfill.
- 5. Carefully cover the GEM with soil making sure not to expose the conductor.


Note 1: Wait for the GEM to harden, about 15 to 20 minutes, before placing the conductor on top of the GEM. You must apply 4 inches (10 cm) of insulating material to the conductors and ground rods exiting the GEM, starting 2 inches (5 cm) inside the GEM.














Note 2: Excess standing water must be removed from trench.

Estimated linear feet of ground conductor covering with each bag of GEM.

| | 3 | | 3 | | - 3 | | |
|--------|-------------|-----|------------------------|-----|------|-----|------|
| | | | Total Thickness of GEM | | | | |
| Tre | ench Width | in | cm | in | cm | in | cm |
| Inches | Centimeters | 4 | 10.2 | 5 | 12.7 | 6 | 15.2 |
| 4 | 10.0 | 3.5 | 1.0m | 2.8 | 0.8m | 2.3 | 0.7m |
| 6 | 15.2 | 9.3 | 0.7m | 1.8 | 0.5m | 1.5 | 0.4m |
| 8 | 20.3 | 7.0 | 0.5m | 1.4 | 0.4m | 1.1 | 0.3m |
| 10 | 25.4 | 5.6 | 0.4m | 1.1 | 0.3m | 0.9 | 0.3m |
| 12 | 30.5 | 4.7 | 0.3m | 0.9 | 0.3m | 0.7 | 0.2m |


A 25 lb. bag of GEM will cover 3.5 linear feet (1.0 m) of conductor length for a 4" wide (10.2 cm), 4" thick (10.2 cm) covering [2" (5.1 cm) below and 2" (5.1 cm) above conductor, based on 63.5 lb/cu ft (1017 kg/m³)

nVent ERICO Ground Enhancement Material (GEM)

Ground Rod Backfill Installation:

- 1. Auger a 3-inch (7.5 cm) or larger diameter hole to a depth of 6 inches (15 cm) shorter than the length of the ground rod.
- 2. Place ground rod into augered hole and drive 1 foot (30 cm) (if possible) into bottom of the hole. The top of the ground rod will be approximately 6 inches (15 cm) below grade. At this time, make any connections to ground rod using Cadweld connections. (See Note 1)
- 3. Premix GEM into a slurry form. Use 1.5 to 2 gallons (5.7 to 7.6 liters) of clean-potable water per bag or bucket of GEM. The installation of GEM in a dry state is acceptable for vertical ground rod applications.
- 4. Pour the appropriate amount of GEM (see table) around the ground rod. To ensure the GEM material completely fills the hole, tamp around the ground rod with a pole. Wait 30 minutes to 1 hour before filling the hole with soil backfill.
- 5. Fill remainder of augered hole with soil removed during augering. For various augered-hole diameters and depths, see the table below:
- Note 1: 4 inches (10 cm) of insulating material must be applied to the conductors and ground rods exiting the GEM, starting 2 inches (5 cm) inside the GEM.

Note 2: Excess standing water must be removed from the hole.

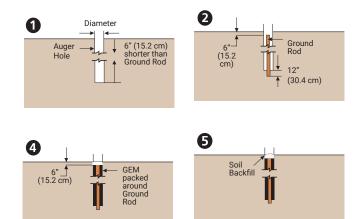

Estimated bags of GEM for backfilling around ground rods to a density of 63.5 lb/ft3

| | | | Depth of Hole* | | | | | | | | | | |
|--------|--------------|----|----------------|----|-----|----|-----|----|-----|----|-----|----|-----|
| Diam | eter of Hole | ft | m | ft | m | ft | m | ft | m | ft | m | ft | m |
| Inches | Centimeters | 5 | 1.5 | 6 | 1.8 | 8 | 2.4 | 10 | 3.0 | 15 | 4.6 | 20 | 6.1 |
| 4 | 10.2 | 2 | | 2 | | 2 | | 3 | | 4 | | 5 | |
| 6 | 15.2 | 3 | | 3 | | 4 | | 5 | | 8 | | 10 | |
| 8 | 20.3 | 5 | | 6 | | 8 | | 9 | | 14 | | 18 | |
| 10 | 25.4 | 7 | | 9 | | 12 | | 14 | | 21 | | 28 | |
| 12 | 30.5 | 10 | | 12 | | 16 | | 20 | | 30 | | 40 | |

^{*8&#}x27; (2.4 m) minimum rod length required to be in contact with the soil (or GEM). Per NEC® 250-52

Note: To mix GEM into a slurry form, use a standard cement mixer or mix in a mixing box, wheelbarrow, etc. Use 1.5 to 2 gallons (5.7 to 7.6 liters) of cleanpotable water per bag of GEM. Do not mix GEM with salt water. For storage and safety precautions, see product packaging.

Customer Support

Support representatives are available to answer any product or application questions you may have; visit nVent.com/ERICO to find a phone number for your nearest customer support representative.

nVent ERICO Cu-Bond Composite Cable



nVent ERICO Cu-Bond is a bare concentric stranded conductor that consists of peripheral tinned copper plated steel which protects and conceals the internal copper stranding.

This conductor is ideal for exposed electrical grounding applications where copper theft may occur. The conductor is difficult to cut with hand tools and the outer stranding is magnetic, which further deters thieves looking for copper.

The CC5A05CB (19 strand) is electrically equivalent to a 4 AWG (25mm²), the CC5A20CB is electrically equivalent to a 2/0 AWG (70mm²) and the CC5A40CB is electrically equivalent to a 4/0 AWG (120mm²). These conductors are ideal for transmission tower, distribution pole and a wide range of above and below grade grounding applications.

FEATURES

- Outer strands comprised of tinned copper bonded steel for corrosion resistance and theft deterrence
- Inner copper stranding is tinned for superior corrosion resistance
- Copper stranding inside of conductor provides increased conductivity and conductor flexibility
- Copper strands are hidden by outer tinned copper bonded steel strands
- Available in three sizes / configurations with electrical equivalency to 4, 2/0 and 4/0 AWG copper
- Suitable for direct burial applications
- More flexible and easier to work with than copper clad steel conductors



nVent ERICO Cu-Bond Round Conductor



For decades, nVent ERICO has provided the market with high quality copper-bonded ground rods.

nVent ERICO has taken that same concept in ground rods and made this into a revolutionary new grounding conductor. The nVent ERICO Cu-Bond Round Conductor is comprised of an electro-plated coating of copper deposited over a layer of nickel surrounding a steel core. This process helps ensure a long-lasting molecular bond between the copper layer and the steel.

The conductor core consists of a low-carbon steel grade for improved flexibility in the field. The copper surface of the conductor provides high conductivity and corrosion-resistance properties.

FEATURES

- Copper-bonded coating will not crack or tear when the conductor is bent
- High resistance to corrosion and provides a low resistance path to Earth
- Available in standard packaging lengths of 100 meters, 50 meters, and 25 meters
- Minimum copper plating thickness of 254 microns
- · Available in nominal diameters of 8, 10, 13, 14, 16, and 18 mm
- Meets the requirements of IEC® 62305-3 Edition 2 and IEC/EN 62561-2 for lightning protection applications
- Cu-Bond Round conductors are UL certified to IEC® 62561-2

BENEFITS AS AN ALTERNATIVE TO COPPER CONDUCTOR

- Theft deterrent: Copper theft is a problem everywhere. Cu-Bond Round Conductor is hard to cut with hand tools due to its steel core. They are also magnetic, notifying potential thieves that the materials within are of little scrap value.
- · Cost-effective: Because the copper is bonded to a steel core, the cost of the conductor is minimized by reducing the total amount of copper in the cable.

BENEFITS AS AN ALTERNATIVE TO GALVANIZED STEEL CONDUCTOR


• Superior corrosion resistance: In comparison to other steel-based products, Cu-Bond Round Conductor provides excellent application life of typically 30-40 years in most soil conditions.







nVent ERICO Cu-Bond Round Conductor

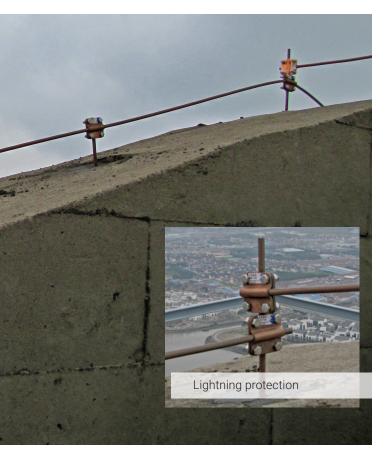

Telecom tower grounding

ABOVE GRADE APPLICATIONS

The unique properties of Cu-Bond Round Conductor make it ideal for both horizontal and vertical placement. Above grade, the conductor is well-suited as a lightning-protection conductor when applied in accordance with the IEC 62305-3 Edition 2.0 standard.

Utility

- Distribution down-lead conductor and assemblies
- -Bonding kits for substation fence or equipment ground risers back to the grid

· Commercial and Industrial

- Alternative conductors to solid copper rod and tapes in grounding and lightning protection

· Telecom

- Conductor for connecting equipment ground to ground grid, and riser (down-lead) conductors for tower
- Grounding conductor for datacenter mesh bonding

- Trackside bonding conductor and stray current conductor
- Grounding kits for trackside equipment, electrical traction power
- -Substation, wayside shelters, communication antenna equipment

BELOW GRADE APPLICATIONS

Copper-bonded steel conductors are ideal as earthing and bonding conductors where copper theft on-site may occur. Cu-Bond is ideal for use in a variety of applications including power distribution earthing and bonding; substation earthing; commercial, industrial, and railway earthing.

- Buried ground grid conductors and electrodes:
- Wireless telecom tower earthing
- Utility substation earthing; power distribution and transmission earthing
- -Large scale ground mount solar farm earthing
- Industrial facility earthing, for example, petro-chemical and mining infrastructure
- Railway earthing
- · Interconnecting grounding conductor between wind towers or grounding grid at base of wind tower



Cu-Bond Round Conductor is stamped with compliance markings directly on the product to ensure genuine product and high quality standards. Beware of imitations.

Ground Stainless Steel Braids (CPI + CPIW)



Stainless Steel Braids Technical Characteristics

- 316L stainless steel braid ready to use
- Full application range: 16 to 70 mm2 section with 150 to 1100 mm length
- · High-quality 316L stainless steel: superior abrasion, corrosion, chemical, and UV resistance for outdoor applications
- Time savings: Quick and easy to install. Ready to use. No additional cutting, stripping, crimping and punching needed. Less labor time for installation
- · Material savings: No additional lugs or terminals needed
- Durable in outdoor, salt and corrosive environments
- · Non-magnetic material
- UL® Listed to UL467 grounding and bonding equipment for US and Canada
- Great for expansion joints where constant movement requires a flexible and indestructible covering


READY-TO-USE STAINLESS STEEL BRAIDS FOR MULTIPLE APPLICATIONS

nVent ERICO developed and manufactures a range of ground stainless steel braids. These high-quality 316L stainless steel braids can be installed in extremely corrosive environments, like offshore applications or coastal applications. The CPI braid is ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation, oil and chemical industry.


nVent ERICO offers 316L stainless steel, one of the highest resistant stainless steel options on the market. nVent ERICO has mastered the process of manufacturing stainless steel for braiding, crimping, cutting or punching and offers a full range of ready-to-use stainless steel braids.


In addition, the CPIW offered by nVent ERICO allows for more connections to larger bolts than any other 50 mm² or 70 mm² braid.

WHERE STAINLESS BRAIDS CAN BE USED:

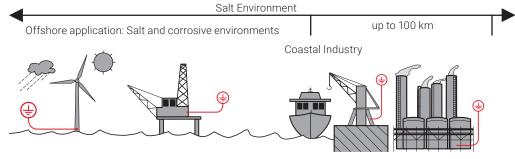

Outdoor application: Oil & chemical industry, food & beverage industry, civil construction, urban projects and transportation





Ground Copper Braids (MBJ & BJ)

Tinned Copper Ground Braids Technical Characteristics

With integral palm

- A complete range of ground flexible connections from 6 to 100 mm² section and from 100 to 500 mm length
- Resistant to vibration and fatigue, reducing maintenance
- · Reliable: No extra contact due to the lugs crimped at the ends of the cable
- Provides weight savings, material savings and lower impedance when compared to similar lugged cables with insulation
- Integral palm, without tin or crimped lugs for superior electrical contact and tensile strength resistance
- · Quick and easy to install: Ready to use. No cutting, stripping, crimping or punching. Less labor time for installation
- · Material savings: No lugs or terminals
- · GOST compliant
- · RoHS compliant

INNOVATIVE, STATE-OF-THE-ART **MANUFACTURING PROCESS**


nVent ERICO manufacturing directly massivates the palms of the MBJ tinned-plated braids. This manufacturing process provides an effective electrical contact, due to the integral palms, without the addition of tin or crimped lugs.

This process welds the flexible braid and brings back a solid tinned or red copper block as a palm. Unlike the traditional presswelded palms process, nVent ERICO's process is suitable for red copper, but also for tin plated copper. The electrical contact between each wire is optimized.

This nVent ERICO process also helps eliminate moisture issues in the palms. By using crimped lugs in a severe environment, moisture can enter in the lug (often by capillarity) and create corrosion between each wire. After several years, the electrical contact between each wire can deteriorate and alter the electrical conductivity of the equipment. The corrosion in the palm is impossible to remove without changing the element.

This process produces RoHS products; no additional substances are added to the tinned-plated wires during the manufacturing process.



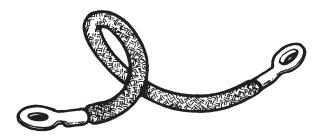

BJ Round braids with crimped lugs

| Part No. | Description | Cross Section | L in | Ø D in | Intensity A | > |
|-------------|-------------|------------------|---------|-----------|----------------|-------------|
| 556900 | BJ 6-150 S | 11.84 kcmil | 5.91 | 0.006 | 45 | 10 |
| 556910 | BJ 6-200 S | 11.84 kcmil | 7.87 | 0.006 | 45 | 10 |
| 556920 | BJ 10-300 S | 19.74 kcmil | 11.81 | 0.006 | 75 | 10 |

nVent ERICO Cadweld Plus

nVent ERICO Cadweld Plus connections offer all the benefits of conventional Cadweld connections:

- Current carrying capacity equal to or greater than that of the conductor
- Withstand repeated fault currents without failing during operation
- Permanent, molecular bond that will not loosen or corrode, resulting in a connection with a lifetime equal to that of the installation
- Join copper to copper, copper to galvanized or plain steel, copper to copper clad steel, copper to bronze/brass/stainless steel, steel to steel, etc.
- No external power or heat source required
- Quality Assurance Inspection is easy and visual
- · Minimal installation training required
- Exceed requirements of "IIEEE Std. 837-2014 -Std. for Qualifying Permanent Connections Used In Substation Grounding"





The Cadweld molecular bond will last the lifetime of the conductors.

CADWELD PLUS


The ultimate welded connection that will never loosen, corrode or increase in resistance.

nVent ERICO is dedicated to continuous product improvement to meet its customers' needs and maintain the highest level of satisfaction. The introduction of Cadweld electrical connections in 1938 enabled them to be quickly recognized

as the ultimate connection for rail, cathodic, power and grounding applications.

Continuing the tradition of technical leadership, Cadweld Plus was developed as a simplified method of performing exothermically welded electrical connections. This trusted system now features a new Cadweld Plus cup design for the integrated welding material package which has streamlined the installation process by eliminating ignition materials.

The tamper proof, integrated welding material package consists of a steel cup containing Cadweld patented welding material alloys and an ignition source. This newly shaped welding material package is designed for use in all standard Cadweld molds, including Cadweld Multi. Once placed in the Cadweld mold, the welding material is electronically ignited using a simple battery-powered control unit with a six-foot lead.

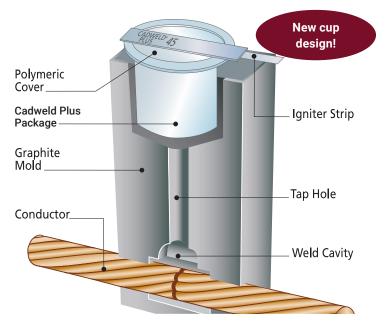

| Feature | Benefits |
|--|---|
| Integrated Welding | Simplifies training and set up |
| Material Package | Saves labor |
| | Simplifies cleaning |
| Color Coded Welding Material | Helps reduce risk of misapplication |
| | • Simple visual verification of correct welding material size |
| Electronic Control Unit | No starting material required |
| | Easy ignition |
| Replaceable Six or Fifteen Foot Control Unit Lead | Increased flexibility in hard to reach areas |

nVent ERICO Cadweld Plus

- · Consists of a tamper proof, disposable, moisture-resistant welding material cup. The welding material, disk and ignition source are incorporated into the self-contained package
- · Long shelf life
- Completes welds at distances of up to 6 ft/1.8 meters (up to 15 ft/4.6 meters with optional lead)
- · Requires minimum components no starting material, no disks, no flint igniters
- Easy to handle, store and transport by air, land or sea in unlimited quantities

- Reduces installation time by 20%
- Has color-coded welding material containers by size and alloy type - for easy identification
- Has electronic ignition with a CE/UL battery powered controller box that is designed for 600 connections with one set of 8 standard AA batteries (included) - requiring no special batteries or chargers
- · Designed for use in standard Cadweld molds including Cadweld Multi

Installation Is Easy! 4 Simple Steps For Permanently Welded Electrical Connections



Insert Cadweld Plus cup into mold (may require use of a cover/baffle)



Attach control unit termination clip to ignition strip



Self contained welding material package



Press and hold control unit switch and wait for the ignition



Open the mold and remove the expended steel cup - no special disposal required

Cadweld Plus Control Unit initiates the reaction of the metal crucible. The standard unit includes a 6-foot (1.8 meter) high temperature control unit lead. The lead attaches to the ignition strip using a custom made, purpose-designed termination clip. After the termination clip is installed on the ignition strip. the installer pushes and holds the ignition button to start a charging and discharging sequence. Within a few seconds the control unit sends a predetermined voltage to the ignition strip and the reaction is initiated.



CADWELD MULTI

The complete welding system for improving grounding system performance, reliability, and installation convenience.

Cadweld Multi simplifies the exothermic welding process. Make over 30 separate connection types with a single, universal mold, which now enables you to make connections to a ground rod.

Welding material sold separately.



EXOTHERMIC WELDED CONNECTIONS

Exothermic welded connections are immune to thermal conditions which can cause mechanical and compression joints to become loose or corrode. They are recognized for their durability and longevity.

Cadweld Multi offers enhanced user benefits:

- ${\boldsymbol{\cdot}}$ Performs welds to ground rods
- Versatile mold produces an unlimited variety of connections
- Compact compression structure enables easy alignment of conductors
- · Language-free instruction guide
- · Lightweight kit for easy transportation
- Easy-to-use system completes weld in seconds
- · Video available on nVent.com/ERICO



CADWELD CONNECTION

The ERICO CADWELD PLUS exothermic welding process fuses conductors together to form a molecular bond with a current-carrying capacity equal to that of the conductor. Grounding systems incorporating this type of connection therefore operate as a continuous conductor with lower resistivity.

Standard Compliance

Cadweld Multi satisfies the requirements of:

- BS 6651
- BS 7430
- NFC 15-100
- IEEE® 837-2014
- IEEE 80-2000
- IEC 1025-1 (ENV 61024-1)

4 EASY STEPS FOR MULTIPLE, PERMANENTLY WELDED, ELECTRICAL CONNECTIONS



Step 1: Layer batting and variable conductor sizes to be welded into dry mold.



Step 2: Add Cadweld Plus welding material.



Step 3: Close cover and connect Cadweld Plus control unit.



Step 4: Press and hold operate button. Open mold after 10 seconds.

HOW DOES IT WORK?


Cadweld Multi combines a versatile mold block and a range of gaskets (batting) to allow numerous different welded connections to be produced without the need to change the mold for each connection type



The process is similar to the Cadweld with one distinct difference...

there is no need to change the mold for different connection types.


The whole process is complete in about one minute. Page 31 details the gasket quantities required for each weld.

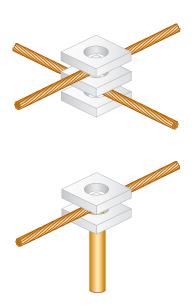


Cadweld Multi offers all of the benefits of Cadweld connections:

- Current-carrying capacity equal to that of the conductor
- Permanent molecular bond that will not loosen or corrode
- · Works with Cadweld traditional welding material
- Works with Cadweld Plus welding material
- Will withstand repeated fault currents
- No external power or heat required
- · Ground rod capabilities
- Visual inspection possible
- · Requires minimal training



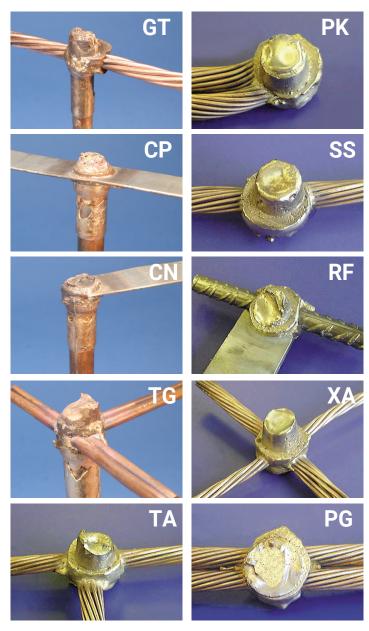

CADWELD MULTI CONNECTION CAPABILITIES

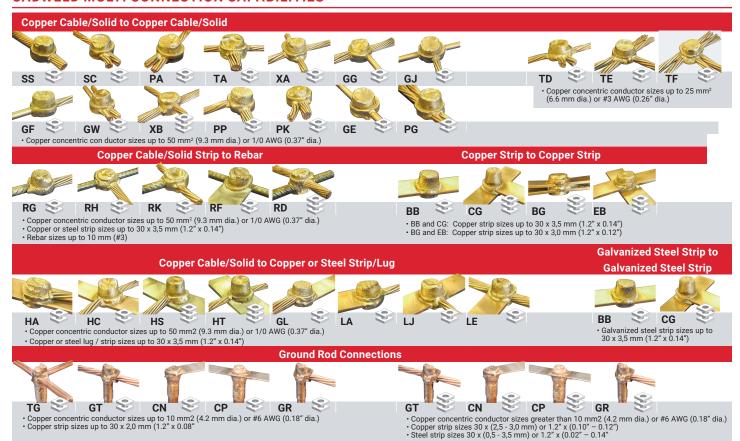

| | | Cadweld Multi Available Items | | | |
|---|------------|--------------------------------------|-------|-------------|--|
| Part Nr | Article Nr | Description | | Weight (kg) | |
| KITCDMV01 | 167782 | Cadweld Multi Kit | 1 | 25.000 | |
| The CADWELD MULTI kit (KITCDMV01) contains the following list of items: | | | | | |
| FMCDMV01 | 120883 | Handle Clamp | 1 | 1.800 | |
| CDMV01H | 240399 | Mold for H welds | 1 | 1.200 | |
| CDMV0112 | 240398 | Mold for welds on 1/2 rods | 1 | 1.200 | |
| CDMV0158 | 240397 | Mold for welds on 5/8 rods | 1 | 1.200 | |
| CDMV0134 | 240396 | Mold for welds on 3/4 rods* | 1 | 1.200 | |
| SCDM01 | 120886 | Set of 33 batting/gaskets | 2 | 0.200 | |
| B399P | 162070 | SKK1 clamp | 1 | 0.500 | |
| TSCSTP | 197295 | Toolset | 1 | 2.000 | |
| B136B | 182030 | Slag Removal Spade | 1 | 0.144 | |
| | | Language free instruction sheet | 1 | | |
| The following They are sold | | used with the Cadweld Multi Kit (K | ITCDM | V01). | |
| T320 | 165000 | Flint Ignitor T320 | 1 | 0.090 | |
| 90 | 163040 | Cadweld Traditional welding material | 10 | 0.090 | |
| 115 | 163050 | Cadweld Traditional welding material | 10 | 0.115 | |
| PLUSCU | 165745 | Control Unit | 1 | 1.088 | |

Cadweld Plus welding material

10

0.158

PLUS#90F20 165705

Symbol denotes number of batting (gaskets) required for each connection.

Requires 2 batting layers for weld

Requires 3 batting layers for weld



NOTES:

- *For connections using a 3/4" ground rod, it is necessary to use #115 / 115PLUSF20 weld material (sold separately).
- For all other connection types, use #90 or 90PLUSF20.
- For connections using galvanized material, remove galvanizing before welding, for a better connection.

Cadweld One Shot



PERMANENT EXOTHERMIC **CONNECTIONS WITHOUT THE MOLD**

Cadweld One Shot produces a permanent exothermic connection to a ground rod that will not loosen, corrode or increase in resistance for the life of the installation. The convenient single-use package makes the connection to the ground rod without a mold or starting material.

Thanks to the electronic Cadweld One Shot Control Unit, welds can now be completed up to 6 ft. (1.8 m) away, increasing weld flexibility in hard-to reach areas. The refractory ceramic body on the Cadweld One Shot is more durable than conventional ceramic and resists breaking.

INSTALLATION IS EASY!



1. After preparing the ground rod and wire, position the Cadweld One Shot and attach the lead to the control unit.



2. Ignite the Cadweld One Shot with the electronic Cadweld Plus Control Unit.



3. After one minute, break off the ceramic crucible. It can also be left in place, if desired.

FEATURES:

- Easy-to-use electronic ignition. No starting material needed
- Extremely durable disposable ceramic outer body eliminates the graphite mold and frame
- Produces a permanent connection that will not loosen or corrode
- · Fits both plain and threaded copper-bonded and full-size steel and stainless steel ground rods
- NEC® compliant
- · cULus® Listed

HOW TO ORDER CADWELD PRODUCTS

This catalog lists the most popular Cadweld connections using solid or concentric stranded copper conductor, insulated or bare. Look in the index for the connection you need. To save time and money, avoid non-catalog items or specials whenever possible.

If you cannot find the connection you need, contact nVent ERICO or your local distributor or agent. We have designed over 45,000 connections, and "specials" are designed every day.

1. What connection do you want?

We strongly recommend that wherever possible you use molds listed in this catalog. After selecting the connection, turn to the appropriate page and select the mold, weld metal and tools you need.

2. Only the most popular Cadweld connections are listed in this catalog.

For a complete listing of Cadweld Exolon connections, please refer to nVent.com/ERICO or your local nVent ERICO representative.

3. What are the conductor sizes?

This catalog covers connections between solid or concentric stranded copper conductors to each other, to lugs, to ground rods, to rebar, to rail and to special grounding accessories. For sizes not listed, contact your local Cadweld distributor, agent, or nVent ERICO.

Note: Other publications describe connections to conductors of copperclad, high voltage copper, aluminum, busbar, lightning protection cable, steel cable, etc.

4. You must have the following to make a weld:

- 4.1 Mold to fit your conductors
- 4.2 Weld metal required by your mold
- 4.3 Handle clamps on frame
- 4.4 Flint ignitor (included with handle clamps and frames)
- 4.5 If using Cadweld Exolon, you need a Relia-Start™ battery instead of a flint ignitor.
- 4.6 Lugs, sleeves, packing material listed on the page with the mold

Cadweld Exolon

CADWELD EXOLON REDUCED-EMISSION MOLDS

Developed in 1988, Cadweld Exolon connections represented a significant advancement in welded electrical connections for sensitive indoor applications like data centers, hospitals, and other clean room environments. The virtual elimination of smoke and a unique electronic starting system makes this an ideal solution for sensitive applications. Each Cadweld Exolon package contains ceramic filters that produce an extremely low emission connection.





How to order Cadweld Exolon:

1. To order Cadweld Exolon products, just specify molds and weld metal from the catalog and add an "XL" prefix.

Example: TAC2Q2Q becomes XLTAC2Q2Q, and 150 becomes XL150.

2. If the weld metal shown in the catalog shows more than one tube required such as 2-#200, you must specify #XL400 to get the correct size filters

Example: XLTAD-4L3Q: XL400

- 3. The following molds require a price key change:
 - "C" price key molds using 2-#150 weld metals change to XLD price key.
 - "E" price key molds using 2-#150 weld metals change to XLJ price key.
 - "H" price key molds using 2-#150 weld metals, contact nVent ERICO.
 - "M" price key molds using 2-#150 weld metals change to XLV price key.
 - "R" price key molds using 2-#150 weld metals change to XLF price key.
 - "T" price key molds, ALL change to XLP price key.

Example: TAC3Q3Q using 2-#150 weld metals change to XLTAD3Q3Q using #XL300 weld metal

- 4. Filters and ignitors are included with the weld metal. XL filters and ignitors are not sold separately.
- 5. The ignitor can be used only once and then must be discarded. Filters will last as specified in the instructions supplied with each mold.
- 6. A Relia-Start electric starter, part number XLB971A1 (battery, charger, carrying case and connecting cable), is required for XL weld metal. Ther eis no starting material in the XL weld metal tube. Batteries operate about 200 starts before recharging from 120 VAC is required. The charger, all electrical connections and instructions are included in the battery case.
- 7. Baffle with cover is required for larger molds. Estimated life of the baffle is 500 welds.
 - XLB972A1 Baffle is required for molds using XL200 and XL250 weld metals.
 - XLB973A1 Baffle is required for molds using XL300 to XL750 weld metals.
- 8. For EZ Change Handles, add XL prefix. (Flint ignitor not included.)
- 9. Welding Tray, part number XLB974B2, is used under the mold to protect cables and equipment from hot materials.

OTHER INFORMATION

Certain tools may be required for various connections. If required, these tools are listed on the same pages as the connection and in Section A. Some tools in section A can save you a lot of time. Also refer to A9E, Contractor Tips, to make your job easier, and learn about labor saving ideas.

For complete pricing information, please visit nVent.com/ERICO or contact and ERICO Representative For Cadweld literature, guides, instructional videos, and more, visit nVent.com/ERICO.

For all your connection needs — we're only a phone call away.

Phone: 800-677-9089 Fax: 800-677-8131

or call your local Cadweld distributor, agent, or Cadweld regional sales manager

Required tools summary:

Required tools are listed with each mold. For your reference, handle clamps and/or frame are summarized below.

| Mold | Required |
|-------------|---------------------------------------|
| A* | Includes frame with handle |
| C, Q & R | Requires L160 |
| D, F & Z | Requires L159 |
| E* | Includes frame but also requires L160 |
| J* | Includes frame but also requires L159 |
| K*, M* & V* | Includes frame with handles |

^{*} To order mold only — without handles or frame — add suffix "M" to mold part number.

Heavy Duty Electrical Connections for Stranded Concentric Copper Conductors

Heavy Duty connections were developed to be used on reclaimd cable. Heavy Duty connections use a larger size connection cavity in the mold and a larger size weld metal than the equivalent standard connections.

The larger size weld metal supplies extra BTU's (but not a higher temperature) to melt the heavy oxide coating on the conductor and to overcome severe field conditions.

Heavy Duty connections offer the following advantages:

- Eliminates cutting the run conductor on certain types of connections.
- · Reduces cable cleaning requirements for old or reclaimed cable.
- · Increases reliability under adverse field conditions.

GROUNDING CONNECTION SPECIFICATION

This specification covers the Cadweld exothermic welding system for use in making electrical connections. The Cadweld system supplied under this specification shall include welding material, molds, tools and accessories as required.


Unless otherwise specified, Cadweld exothermic welding system shall be used for all electrical grounding connections of copper to copper and copper to steel conductors. Cadweld connections shall be suitable for exposure to the elements of direct burial in earth or concrete without degradation over the lifetime of the grounding system.

The Cadweld exothermic welding system furnished under this specification shall meet the applicable requirements of IEEE Standard 80 "IEEE Guide for Safety in AC Substation Grounding" and IEEE Standard 837 IEEE "Standard for Qualifying Permanent Connections Used in Substation Grounding". Independent test data showing conformance to IEEE Std. 837 shall be readily available.

The Cadweld Mold Numbering System


The Cadweld mold part number gives, in code, the complete information about the mold.


Type of connection, mold price key, and conductor size(s)

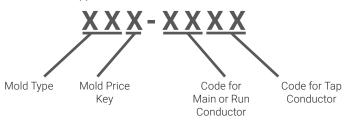


Examples:









A graphite mold is used for making most Cadweld connections. Cadweld molds will generally last an average of 50 or more connections under normal usage.

Price Key and Handle Clamp and/or Frames

Handle clamps are required for most molds. Specialized frames with handles are used on some molds. Flint igniters are included with handle clamps. The following handle clamps are most widely used.

L160 for all molds having a "C", "E", "R" and "Q" mold price key (3" wide molds)

L159 for all molds having a "D", "F", "J" and "Z" mold price key (4" wide molds)

Handle Clamps with an "XL" prefix are for use with the Cadweld Exolon system and do not come with a flint igniter. Mini E-Z Change Clamps for use with mini-welders.

Pictured below are the molds and handle clamps / and or frames and handles for the various price key molds:



"A" Price Key Mold Includes Hold Down Frame



"C", "D", "F", "R", "Q" and "Z" Price Key Mold L160 or L159 Handle Clamp Required



"E" and "J" Price Key Mold L160 or L159 Handle Clamp Required



"M" and "V" Price Key Mold Includes Frame with Handles



"H" Price Key Mold Includes Hold Down Frame with Handles



"G", "K", and "L" Price Key Mold Includes Frame with Handles



"T", "P" and "N" Price Key Mold Includes Mini-EZ Handle Clamp To order mold only, add an "M" suffix to the part number (for example, SST1TM)

MOLD OPTIONS



Split Crucible Molds

Molds made with a horizontal opening and solid crucible section may be specified as a split crucible type. The advantage of the split crucible mold is easier cleaning.

To order a mold with a split crucible, add an "L" suffix to the mold part number (for example, TAC2G2GL).



WEAR PLATES

Wear Plates reduce mechanical abrasion of molds at cable entry points and help prevent leakage of molten metal (particularly on larger 7 strand conductor). These features prolong mold life.

To order a mold with wear plates, add a "W" suffix to the mold part number (for example, PTC2G2GW).

SUPERIOR SOLUTIONS

Over a century of industry

Representatives across the US and Globe

Complimentary design and engineering services

Complete facility electrical protection solutions



ERICO AND NVENT

Customized solutions for modern industry

Since 1903, ERICO has been a partner in building global industry and infrastructure. Today, we continue that tradition by offering industry leading products in addition to value-added solutions.

As of 2015, ERICO is now a nVent company in an effort to continue serving our customers as effectively as possible. Visit our website below for more information.

nVent.com/ERICO

Grounding, Bonding & Connectivity Products

nVent ERICO Facility Electrical Protection

nVent ERICO offers a full range of grounding, bonding and connectivity products for data centers and other datacom applications worldwide. nVent ERICO's product offerings include grounding and bonding accessories, surge protection and lightning protection products, and welded electrical connections.

Grounding and Bonding

nVent ERICO offers an extensive line of grounding and bonding products, which includes ground rods and accessories, signal reference grids, chemical ground rods, GEM ground enhancement material, couplers, clamps, inspection wells, grounding and perimeter bus bars and ground test instruments.

Surge Protection


nVent ERICO surge protection products are designed to protect against damaging electrical surges on power and communications lines caused by lightning, building systems and other switching events.

Lightning Protection


Direct and indirect lightning strikes can pose many risks to businesses, including damaging buildings and critical equipment. nVent ERICO lightning protection products offer a variety of solutions to help protect valuable equipment and personnel and to avoid disruption and downtime.

Welded Electrical Connections

Cadweld welded electrical connections are used to connect the grounding and bonding conductors to each other and to the ground electrode system, including ground rod electrodes, building steel and rebar. Cadweld connections provide a permanent, low-resistance connection needed to create a long-lasting, reliable bonding network. Cadweld connections will not deteriorate, cannot loosen and are made with inexpensive, lightweight and portable equipment. Cadweld Exolon is a filtered, smokeless connection system designed for making connections indoors.

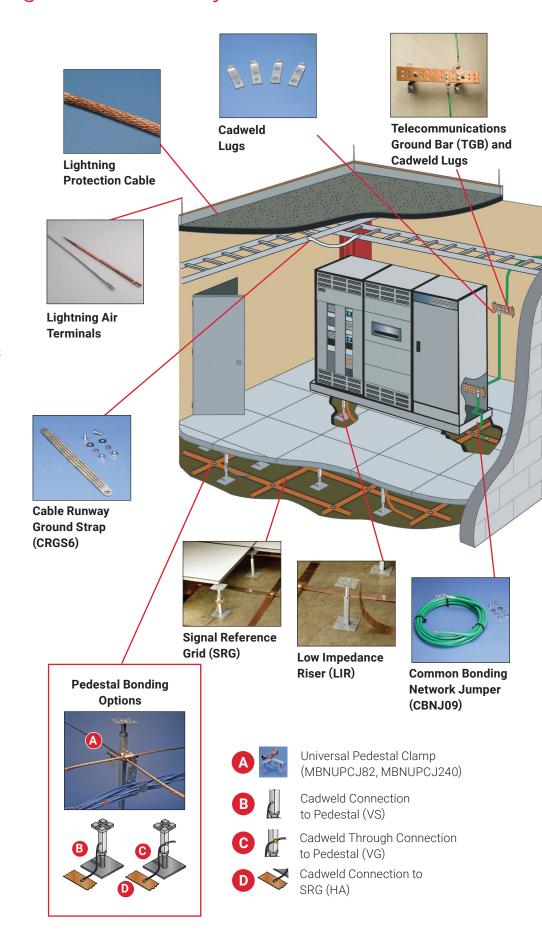

For Datacom Applications

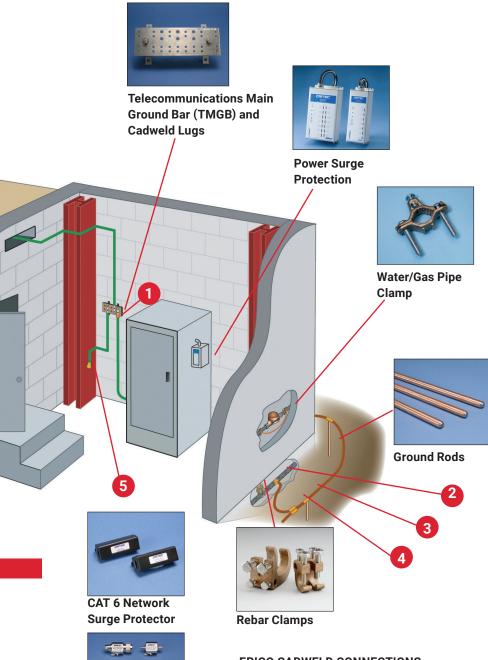

ERICO CADWELD CONNECTIONS



Coaxial Surge Protector



Subscriber/High **Speed Line Surge Protector**


Cable-to-Lug (GL) Cable-to-Rebar (RH) Cable-to-Ground Rod (GT) Cable-to-Cable (PT)

Cable-to-Steel (VF)

Prefabricated Signal Reference Grid (SRG)

The SRG is an integrated high-frequency, low-impedance signal reference grid structure. which consists of a network of flat copper strips welded at the crossovers in accordance with recommendations found in IEEE® 1100 "IEEE Recommended Practice for Powering and Grounding Electronic Equipment." The SRG is also referred to as a "Supplementary Bonding" Grid" (SBG) per TIA® 607.

The SRG lies directly on the sub-floor under the raised-floor structure and is used to interconnect metal frames, racks, enclosures, common terminals for signal level power and the electrical distribution grounding system. The SRG is used as a ground reference system for IT equipment by creating an equipotential ground reference plane over a large range of frequencies from DC through the Megahertz range. At high frequencies, flat strip conductors have considerably lower inductive reactance than concentric stranded or solid conductors and the configuration of the SRG results in a lower impedance system, which limits potential differences between data systems and other systems during voltage transients or other power system disturbances. The following graph from IEEE 1100 shows the impedance of an SRG system versus a wire-only grounding system.



SRG Features and Benefits

- · Economical and maintenance-free
- Recommended in IEEE® 1100
- Reduces common-mode noise
- · Increases noise immunity to electric fields
- Reduces capacitive coupled interference
- Compliant with Information Technology Industry Council Information Letter "Guidelines For Grounding Information Technology Equipment (ITE)" and the National Electrical Code.

IEEE is a registered trademark of The Institute of Electrical and Electronics Engineers, Incorporated.


TIA is a copyright of Telecommunications Industy Association

NOTE: Cadweld connections shown are typical. Connections for any configuration and conductor are available to meet specific application requirements.


Power Generation

Power Generation Facilities

Traditional power generation facilities have either been coal-fired, gas-fired, nuclear, diesel or hydro-powered. Modern alternative power generation facilities can include geothermal, bio-gas, wind or solar. nVent ERICO brand of lightning protection systems have been used to provide lightning protection to the whole host of facilities in a unique manner. nVent ERICO grounding and bonding solutions can provide a complete system for the grounding and bonding of any of these facilities.

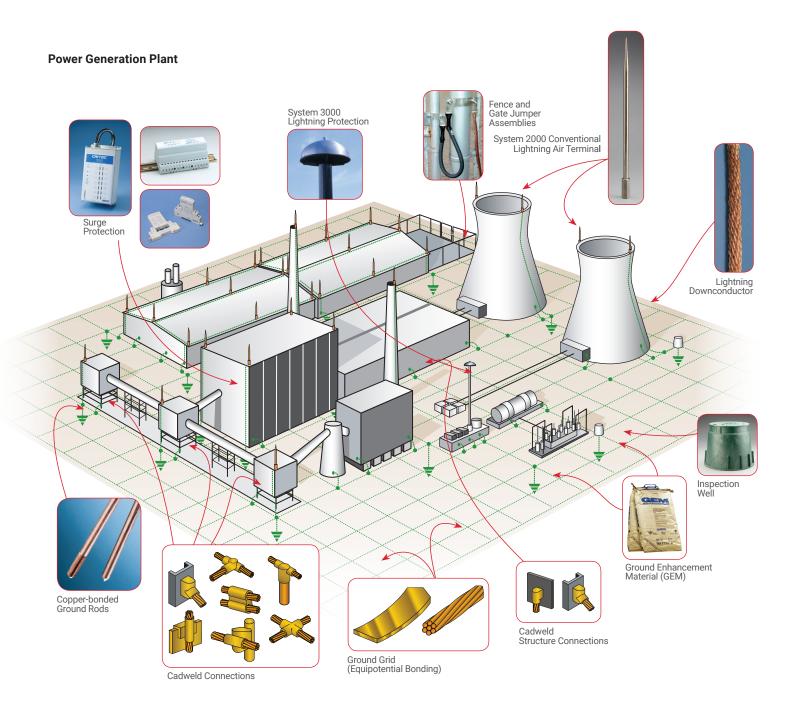

Power Transmission and Distribution

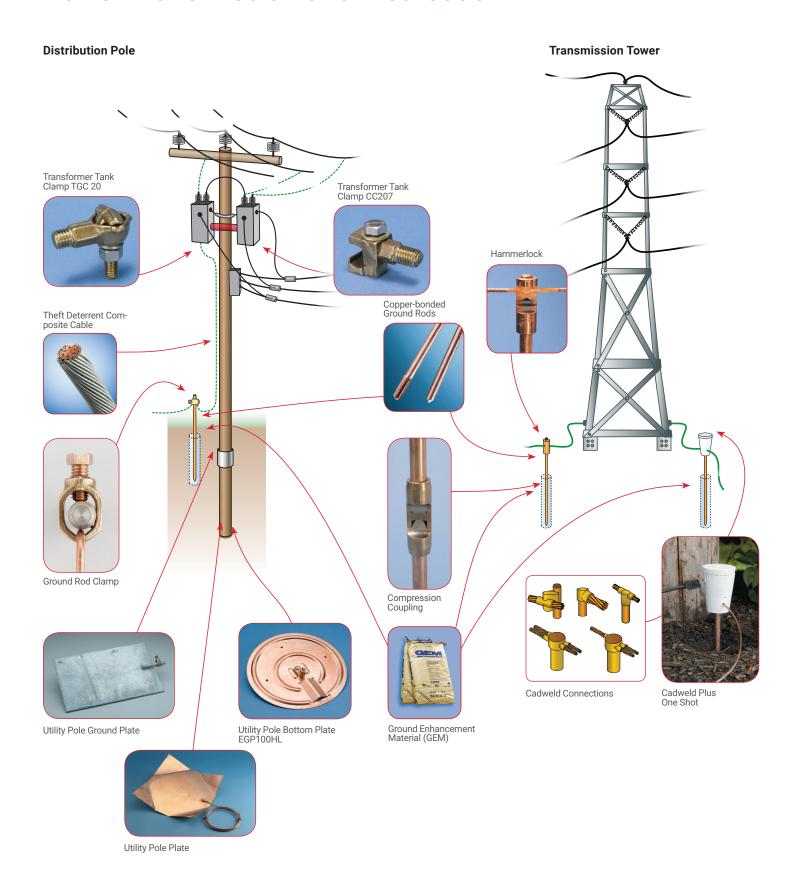

Substation Earthing/Grounding and Lightning Protection

The conceptual design of a ground grid at a substation is summarized by the points below and depicted on pages 4 and 5.


- a) A continuous loop conductor should surround the perimeter to enclose as much area as practical. Under Standard IEEE® 80, this loop conductor is placed 3 ft (or 1 meter) outside the fence line. This measure helps to avoid high current concentration and high gradients both in the grid area and near the projecting cable ends. Enclosing more area also reduces the resistance of the grounding grid.
- b) Within the substation, conductors are typically laid in a parallel grid and, where practical, along the structures or rows of equipment to provide for short ground connections.
- c) A typical grid system for a substation may include bare copper conductors buried 18" (0.5 m) below grade, spaced 9 ft to 21 ft (3 m to 7 m) apart, in a grid pattern. At cross-connections, the conductors would be securely bonded together. Ground rods may be at the grid corners and at junction points along the perimeter.
- d) This grid system would be extended over the entire substation switchyard and beyond the fence line.

Earth/Ground Rods

nVent ERICO offers a range of ground rods to suit the needs and preferences of the utilities. The most common of these are copper-bonded steel rods, due to their versatility in varied soil conditions and compatibility with various common metals used underground. The copper-bonded ground rod has an electrolytic coating of copper deposited over a layer of nickel. This process helps ensure a long-lasting molecular bond between the copper layer and the steel core. nVent ERICO recommends nVent ERICO brand of copper-bonded ground rods because the copper coating will not slip or tear when driven, nor will it crack if the rod is bent. The tough, carbon steel core has good characteristics for deep driving. Copper-bonded ground rods have a high resistance to corrosion and provide a low-resistance path to ground.

It is important to note that certain soils and landfill areas may not be compatible with copper. In these situations, stainless steel is a better choice. The nVent ERICO brand of copper-bonded ground rods comply with UL® 467, BS:7430 & EN50164, Standards.

Cadweld Connections

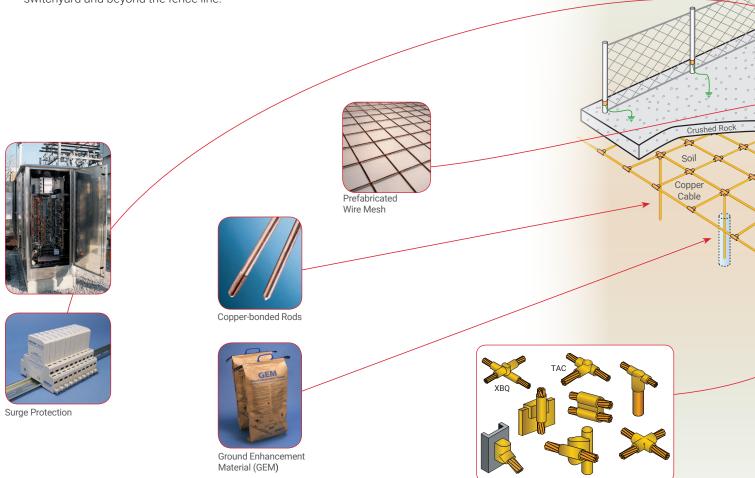


Substation Earthing/Grounding and Lightning Protection

Surge Protection for SCADA-controlled Equipment

Electronic equipment operating within a substation environment is particularly subject to electrical disturbances such as switching, electrical noise, ground potential rise and occasional induced or direct lightning impulse. Surge protection is an extremely cost-effective investment for electronic substation equipment, because:

- Each site's operation is critical to the quality supply of electrical power
- · Downtime costs are significant

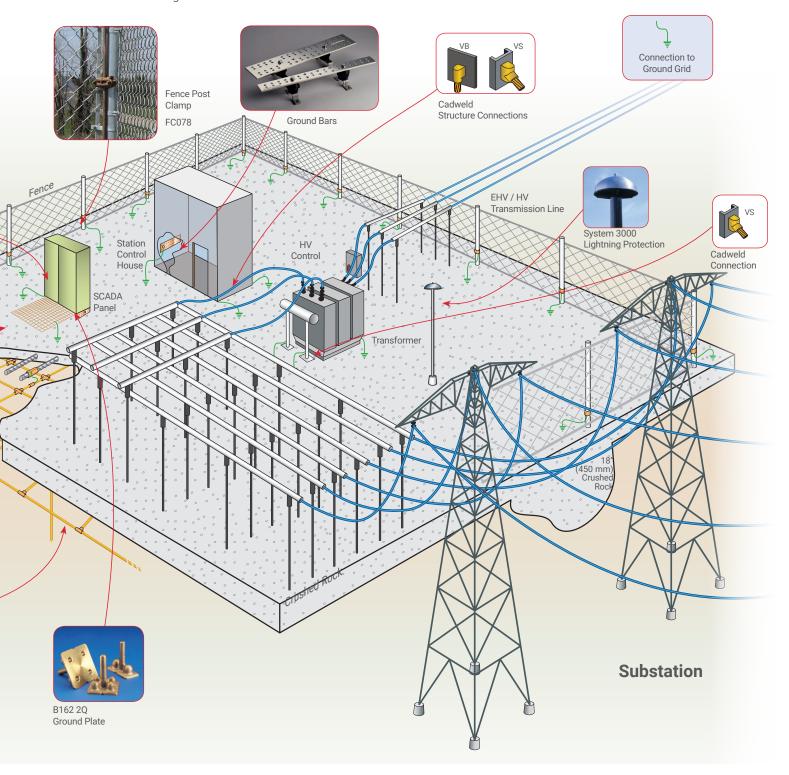

Solar Products

nVent ERICO offers a wide range of products for the solar market. In addition to an extensive product offering, nVent ERICO engineers and designers can provide design assistance for many solar installation aspects of your facilities worldwide.

The megawatts of solar energy produced continues to increase globally. More countries have focused resources on this valuable endeavor. Solar photovoltaic power systems include modules, inverters, rack mounting components, monitoring systems for off-grid systems, batteries and charge controllers. Solar power systems are designed to be in service for periods of 30 years or more, therefore it is imperative to construct the systems with products that are designed to help provide efficient operation for the lifetime of the installation. nVent ERICO is uniquely positioned to provide the necessary products, components and services for solar programs worldwide.

Years of experience in the fields of grounding and bonding, lightning protection, low-voltage power distribution, fastening and support and reinforced concrete construction, combined with global manufacturing capabilities, allow nVent ERICO to provide comprehensive solutions for the solar market. Four of our product lines have joined together to offer a full range of solutions: nVent ERICO facility electrical protection products, nVent ERIFLEX low-voltage power distribution products, nVent LENTON concrete reinforcement products and nVent CADDY fixings, fasteners and supports.

nVent ERICO's products are technically superior, meet or exceed international and industry code requirements and help prolong service life. As a global organization, nVent ERICO is experienced with regional codes, standards and practices, including OEM specs.

Grounding, Lightning Protection, Electrical Connection and Cable Management Solutions for the Solar Power Industry







Lightning Protection Systems

Solar Bonding Lugs

Grounding Accessories

A PV Array



RIGD and SK Series Strut Clamps

MBJ Grounding Braids



Copper-bonded **Ground Rods** Mesh

Equipotential Ground






SCH Series Strut Clamps



Termination (IBTB)






Bolt Couplers

nVent LENTON **Terminator**





nVent CADDY Pyramid

Exothermically Welded Connections

Ground **Enhancement** Material

Solar Products



nVent ERIFLEX Flexibar



DIN Rail Profiles



Low Voltage Insulators



nVent ERIFLEX Flexibar Supports



Equipment Grounding Bus Bars



TDS50 DC **Surge Protection Devices**




Power Terminals



Power Blocks/ **Splice Blocks**



Distribution **Blocks**

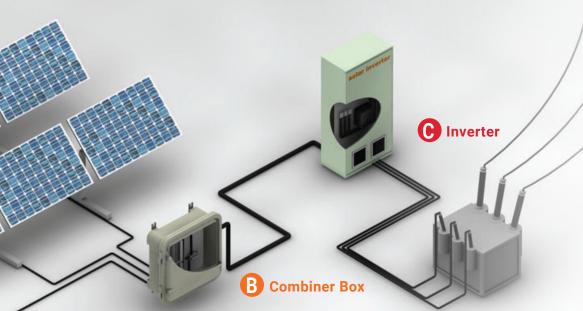



TDX AC Surge Protection Devices



Grounding Bars



Insulated Braided Shunt



Terminal Strip






Distribution Blocks






Cabling Sleeves

Wind Products

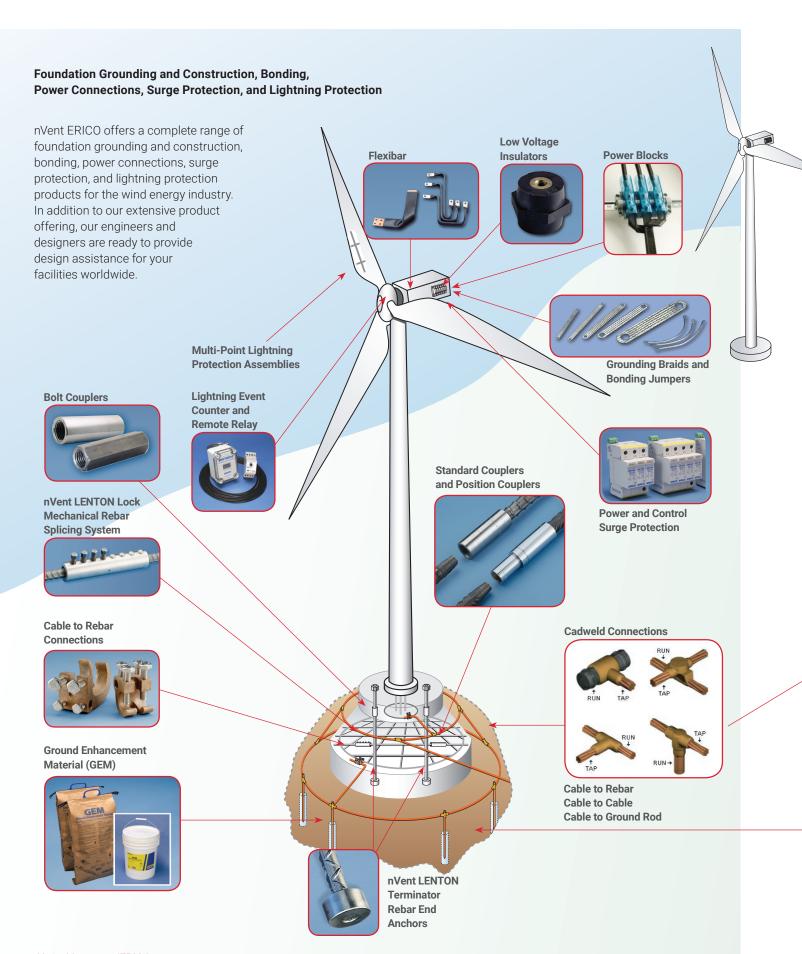

Wind Products

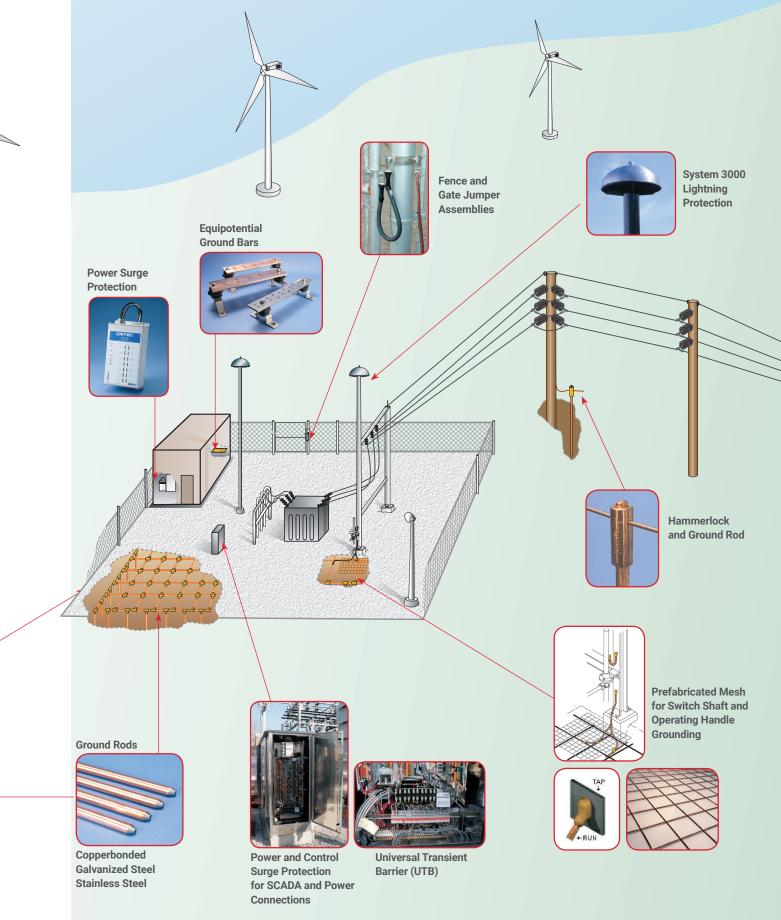

Telecom


Grounding/earthing, lightning protection and surge protection are critical parts of a telecommunications facility installation. nVent ERICO has complete telecommunications applications solutions to help protect the facility against electrical noise, lightning induced surges and transients caused by switching components in the power systems.

nVent ERICO solutions include ground rods, ground mats, ground enhancing material (GEM), ground bars, Cadweld connections, lightning protection systems and MDF, co-axial and power surge protectors.

To make the application of these products simpler, the grounding, lightning protection and surge protection system at a telecommunications facility is divided into 5 components.

- 1. Indoor Bonding Arrangement
- 2. Outdoor Grounding Arrangement
- Surge Protection for Power Lines
- 4. Surge Protection for Telephone Lines
- Direct Strike Lightning Protection

nVent ERICO ground bars can be used to achieve the ideal indoor grounding arrangement as required at the telecommunications

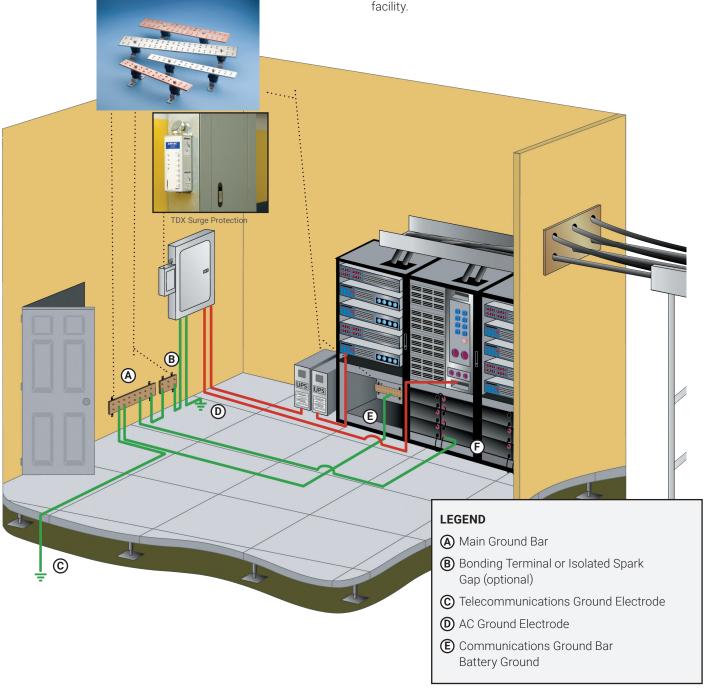


Telecom

The outdoor arrangement of a grounding system at a telecommunications facility is depicted here. This arrangement is not always possible due to certain constraints at the site. Where the telecommunication equipment is installed in a large multi functional building or several floors above the ground floor this layout may not be possible.

Alternative outdoor ground electrode system needs to be considered on a case by case basis if the suggested layout below is not possible to implement.

nVent ERICO offers a full range of products to form the outdoor grounding system at a telecommunications facility.

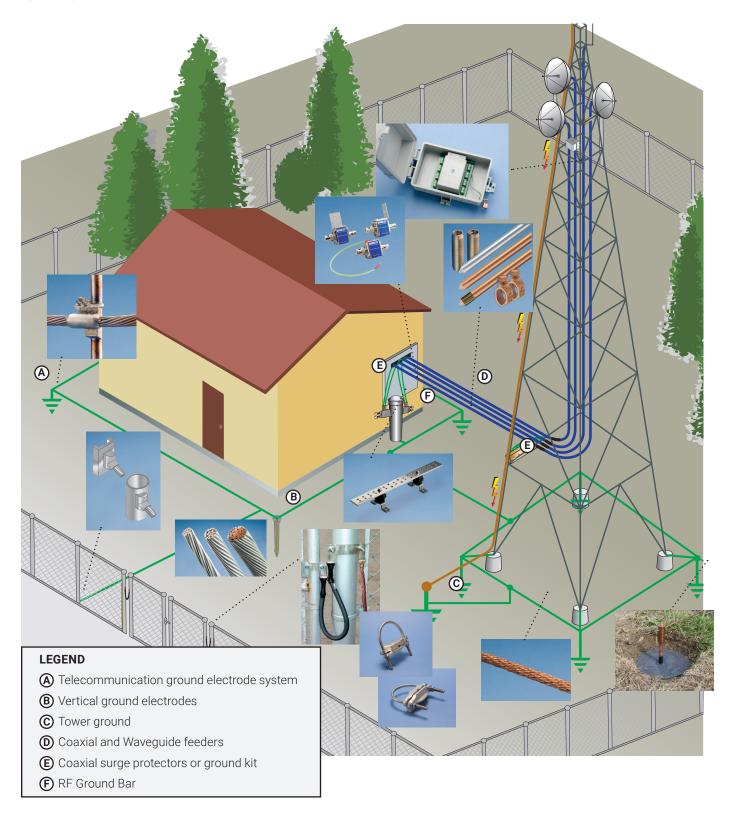


Lightning Protection for Telecommunications Towers

Direct lightning strikes to telecommunications towers are a reasonably regular occurrence, more so on mountain tops and in certain parts of the world. The traditional approach to lightning protection on towers is to have a lightning rod on the top of the tower and a dedicated down conductor comprised of bare cable or tape that is installed on the tower to connect the lightning rod to the ground.

A modern method is to use an optimal air terminal design, the nVent ERICO Dynasphere mounted on top of the telecommunications mast on a 3-4 metres long fibreglass reinforced pole, FRP. The FRP provides isolation between the air terminal and the tower and helps ensure that the lightning

does not flash over and electrify the mast or the antenna. A special purpose downconductor, called the nVent ERICO Ericore is routed in the core of the FRP and connects to the bottom of the Dynasphere via a high voltage, impulse rated termination. The Ericore runs along a leg of the tower away from the routes of feeders, down to the tower grounding system. Ericore cable is designed to minimize the voltage between itself and the tower so that the bulk of the lightning energy is contained within the cable, thereby protecting the tower and feeders from conducted lightning currents and having much less reliance on bonding practices which sometimes are overlooked or completed incorrectly.

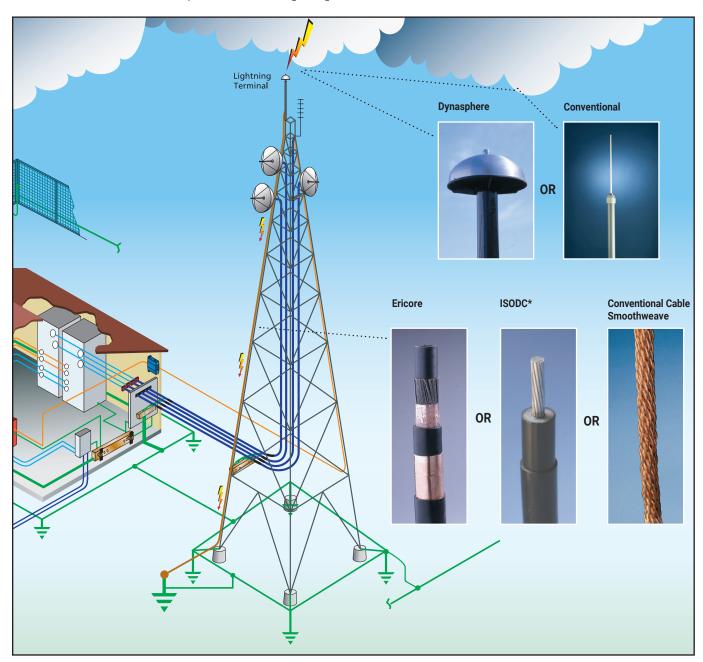


* ISODC - is an isolated lightning protection cable system based around IEC62305. It is designed to isolate the lightning current from sensitive equipment, eliminating the need for separation distances required with conventional cable. Contact nVent ERICO for further information.

Lightning Protection for Roof Mounted Installations

Traditionally, some rooftop installation have been protected by the use of air terminals (Franklin Lightning Rods), often connected to the building lightning protection system. However, the traditional building lightning protection techniques are not well suited to protect these roof top installations. Hence many telecommunications companies have opted not to provide any form of air terminal. Instead they do extensive bonding of all their roof mounted equipment.

The Isolated Downconductor System provides a modern approach to lightning protection for rooftop installations. The nVent ERICO brand of isolated systems provide a traditional air terminal fitted to an isolated fiberglass reinforced plastic (FRP) mast. The isolated downconductor internally connects to the air terminal inside the FRP. The FRP mast has natural isolation properties, high strength for windy sites and low weight to minimize mast loading.

The advantage is that this downconductor can be mounted directly on the mast or structure to be protected - without electrification of mounted equipment under lightning conditions.

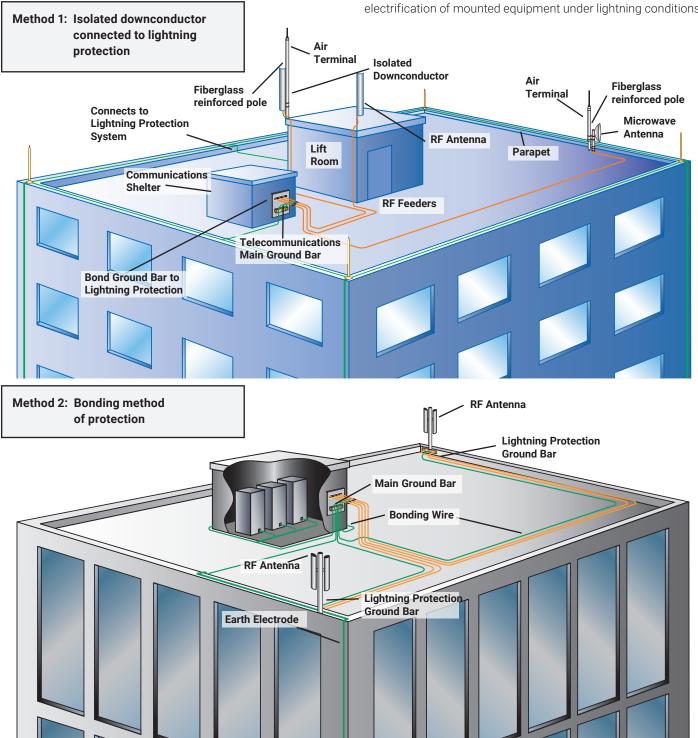

Connectors & Positioners

HAMMERLOCK GROUND CLAMP





FEATURED HIGHLIGHTS

- Irreversible connection with excellent mechanical strength
- · Fast and simple installation requires only a hammer
- · No special training required
- Low resistance connection
- Provides a visual indication of completed connection
- Allows for "T" or pass-through connections

The patented Hammerlock irreversible grounding connector mechanically connects the grounding conductor to the ground rod. Machined from highly conductive copper, the state-of-the-art Hammerlock provides a low resistance connection designed to withstand ground fault currents and lightning transients. The connector's mechanically rugged design will help ensure that the highest level of performance is maintained for many years after the connection has been buried in the harsh underground environment.


Material: Copper



| латенат. Обррст | | | | | |
|-----------------|---------------------------------|--------------------------------|---|-------------------------|----------------|
| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Number of Conductors | Certifications |
| Ground Rod Type | e: Copper-bonded | | | | |
| EHL12FC1K | 1/2" | 0.50" | #6 Solid - #4 Solid, 16 mm² Stranded | 1 | cULus |
| EHL12FC1K1K | 1/2" | 0.50" | #6 Solid - #4 Solid, 16 mm² Stranded | 2 | cULus |
| EHL12FC1V | 1/2" | 0.50" | #4 Stranded - #2 Stranded, 25 mm² Stranded | 1 | cULus |
| EHL12FC2G | 1/2" | 0.50" | 1/0 Stranded - 2/0 Stranded | 1 | cULus |
| EHL34C1K | 3/4" | 0.68" | #6 Solid - #4 Solid, 16 mm² Stranded | 1 | cULus |
| EHL34C1V | 3/4" | 0.68" | #4 Stranded - #2 Stranded, 25 mm² Stranded | 1 | cULus |
| EHL34C2G | 3/4" | 0.68" | 1/0 Stranded - 2/0 Stranded | 1 | cULus |
| EHL58C1K | 5/8" | 0.56" | #6 Solid - #4 Solid, 16 mm² Stranded | 1 | cULus |
| EHL58C1K1K | 5/8" | 0.56" | #6 Solid - #4 Solid, 16 mm² Stranded | 2 | cULus |
| EHL58C1V | 5/8" | 0.56" | #4 Stranded - #2 Stranded, 25 mm² Stranded | 1 | cULus |
| EHL58C2G | 5/8" | 0.56" | 1/0 Stranded - 2/0 Stranded | 1 | cULus |
| Ground Rod Type | e: Galvanized | | | | |
| EHL34G1K | 3/4" | 0.73" | #6 Solid - #4 Solid, 16 mm² Stranded | 1 | cULus |
| EHL34G1V | 3/4" | 0.73" | #4 Stranded - #2 Stranded, 25 mm² Stranded | 1 | cULus |
| EHL34SG1K | 3/4" | 0.73" | #6 Solid - #4 Solid, 16 mm² Stranded | 1 | |
| EHL34SG1V | 3/4" | 0.73" | #4 Stranded - #2 Stranded, 25 mm² Stranded | 1 | |
| EHL58G1K | 5/8" | 0.63" | #6 Solid - #4 Solid, 16 mm² Stranded | 1 | cULus |
| EHL58G1K1K | 5/8" | 0.63" | #6 Solid - #4 Solid, 16 mm² Stranded | 2 | cULus |
| EHL58G1V | 5/8" | 0.63" | #4 Stranded - #2 Stranded, 25 mm² Stranded | 1 | cULus |
| EHL58G2G | 5/8" | 0.63" | 1/0 Stranded - 2/0 Stranded | 1 | cULus |
| | | | | | |

GROUND ROD CLAMP, ROD TO CONDUCTOR, STAINLESS STEEL





FEATURED HIGHLIGHTS

- For use with copper-bonded ground rods
- Parts that are UL Listed are suitable for direct burial in earth or concrete






Material: Silicon Bronze

| Material: Sili | aterial: Silicon Bronze | | | | | | |
|----------------|---------------------------------|--------------------------------|--|-------------|----------------|--|--|
| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Wrench Size | Certifications | | |
| Torque: 150 | – 300 in lb | | | | | | |
| CP34 | 1/2" - 3/4" | 0.50" - 0.68" | #10 Solid - 1/0 Stranded, 6 mm² Solid - 50 mm² Stranded | 1/2" | CSA, cULus | | |
| CP38 | 3/8" | 0.38" | #10 Solid - #2 Stranded, 6 mm² Solid - 25 mm² Stranded | 3/8" | cULus | | |
| CP58 | 1/2" - 5/8" | 0.50" - 0.56" | #10 Solid - #2 Stranded, 6 mm² Solid - 25 mm² Stranded | 1/2" | CSA, cULus | | |
| Torque: 150 | – 450 in lb | | | | | | |
| HDC1 | 1" | 1.00" | #8 Solid - 4/0 Stranded, 10 mm² Solid - 95 mm² Stranded | 9/16" | cULus | | |
| HDC12 | 1/2" | 0.50" | #10 Solid - #2 Stranded, 6 mm² Solid - 25 mm² Stranded | 1/2" | CSA, cULus | | |
| HDC34 | 3/4" | 0.68" | #8 Solid - 1/0 Stranded, 10 mm² Solid - 50 mm² Stranded | 9/16" | CSA, cULus | | |
| HDC34SP | 3/4" | 0.68" | #8 Solid - 3/0 Stranded, 10 mm² Solid - 70 mm² Stranded | 9/16" | CSA | | |
| HDC58 | 5/8" | 0.56" | #8 Solid - 1/0 Stranded, 10 mm² Solid - 50 mm² Stranded | 9/16" | CSA, cULus | | |
| HDC58R | 5/8" | 0.56" | #8 Solid - 1/0 Stranded, 10 mm² Solid - 50 mm² Stranded | 1/2" | CSA, cULus | | |

GROUND ROD CLAMP, ROD TO CONDUCTOR, STAINLESS STEEL





FEATURED HIGHLIGHTS

- Unique stamped body design will not crack from excessive torque
- Provides a greater surface area contact to allow improved performance of the connector
- Compatible with copper, copper bonded, galvanized, stainless steel, rebar and plain steel ground rods and electrodes

Material: Stainless Steel 304 (EN 1.4301) Torque: 150 - 300 in lb




| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Wrench Size |
|-----------------|---------------------------------|--------------------------------|---|-------------|
| Torque: 150 – 3 | 800 in lb | | | |
| SP58 | 1/2" - 5/8" | 0.500" - 0.625" | #10 Solid - #2 Stranded, 6 mm² Solid - 25 mm² Stranded | 1/2" |
| SP58B916 | 1/2" - 5/8" | 0.500" - 0.625" | #10 Solid - #2 Stranded, 6 mm² Solid - 25 mm² Stranded | 9/16" |

GROUND ROD CLAMP, U-BOLT, TINNED, ONE CONDUCTOR







FEATURED HIGHLIGHTS

- Tinned finish provides a theft-deterrent appearance
- Accepts conductors in both parallel and perpendicular orientations

Material: Bronze, Stainless Steel 304 (EN 1.4301) Finish: Tinned



| Ground Rod Diameter, Nominal | Conductor Size, UL |
|------------------------------|---|
| 5/8" - 3/4" | #4 Sol - 2/0 Str, 16 mm ² Str - 50 mm ² Str |
| 5/8" - 3/4" | 2/0 Sol - 250 kcmil Str, 70 mm ² Str - 120 mm ² Str |
| | |
| | 5/8" - 3/4" |

| Conductor Orientation (Parallel or Perpendicular) | | | | | | |
|---|----------------|----------------|---------|---------------|---------|---------------------|
| GC064 | Conductor Size | | | | | |
| Nominal Ground Rod Diameter | #4 Sol | #4 Str | #2 Sol | #2 Str | 1/0 Sol | 1/0 Str- 3/0 Sol |
| 5/8" copper-bonded ground rod | Par. | Par. | Par. | Par. | Both | Perp. |
| 5/8" galvanized/stainless steel ground rod | Par. | Par. | Par. | - | Perp. | Perp. |
| 3/4" copper-bonded ground rod | Par. | - | - | - | Perp. | Perp. |
| 3/4" galvanized/stainless steel ground rod | - | - | - | - | Perp. | - |
| GC065 | Conductor Size | | | | | |
| Nominal Ground Rod Diameter | #4 Sol-#4 Str | #2 Sol-4/0 Sol | 4/0 Str | 250 kcmil Str | | |
| 5/8" copper-bonded ground rod | Par. | Both | Both | Par. | | |
| 5/8" galvanized/stainless steel ground rod | Par. | Both | Both | Par. | | |
| 3/4" copper-bonded ground rod | Par. | Both | Both | - | | |
| 3/4" galvanized/stainless steel ground rod | Par. | Both | - | - | | |

GROUND ROD CLAMP, U-BOLT, TINNED, ONE CONDUCTOR





Material: Bronze Finish: Tinned

• Ground rod clamp that allows up to three separate conductors to be connected to a ground rod

- Bronze material is a copper alloy with high copper content
- Tinned bronze has theft-deterrent appearance

FEATURED HIGHLIGHTS

| Part | Ground Rod Diameter, | Ground Rod Diameter, | Conductor |
|---------|----------------------|----------------------|---|
| Number | Nominal | Actual | Size |
| GC065TH | 5/8" - 3/4" | 0.625" – 0.750" | 2/0 Solid - 250 kcmil Stranded, 70 mm² Stranded - 120 mm² Stranded |

GROUND ROD CLAMP, U-BOLT SADDLE, ONE CONDUCTOR





FEATURED HIGHLIGHTS


• Clamp that allows a conductor to be connected to a ground rod

Material: Copper Alloy

| Part | Ground Rod Diameter, | Ground Rod Diameter, | Conductor |
|-----------|----------------------|----------------------|--|
| Number | Nominal | Actual | Size |
| REP16120L | 3/4" | 0.68" | #4 Solid - 4/0 Stranded, 16 mm² Stranded - 120 mm² Stranded |

GROUND ROD CLAMP, U-BOLT, BARE, ONE CONDUCTOR







FEATURED HIGHLIGHTS


- Accepts conductors in both parallel and perpendicular orientations
- For use with copper-bonded ground rods

Material: Copper, Bronze, Brass

| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size |
|----------------|---------------------------------|--------------------------------|--|
| GUV16070 | 5/8" - 1" | 0.560" - 0.914" | #4 Solid - 2/0 Stranded, 16 mm² Stranded - 70 mm² Stranded |
| GUV70185 | 5/8" - 1" | 0.560" - 0.914" | #4 Solid - 300 kcmil Stranded, 16 mm² Stranded - 185 mm² Stranded |

| Conductor Orientation (Parallel or Perpendicular) | | | | | |
|---|------------------|---------|---------------|---------------|--|
| Nominal Ground Rod Diameter | #4 Sol - 4/0 Sol | 4/0 Str | 250 kcmil Str | 300 kcmil Str | |
| 5/8" copper-bonded ground rod | Both | Both | Both | Both | |
| 3/4" copper-bonded ground rod | Both | Both | Both | Both | |
| 1" copper-bonded ground rod | Both | Both | Both | - | |

GROUND ROD CLAMP WITH PREFABRICATED PIGTAIL

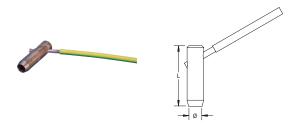

FEATURED HIGHLIGHTS

- Prefabricated assembly including grounding clamp with pigtail
- Fast and simple installation requires only a hammer

Material: Copper Insulation: Green and Yellow Insulated Cable

| Part Number | Ground Rod Diameter, Nominal | Length | Pigtail Length | Conductor Size | Unit Weight |
|----------------|---------------------------------|--------|----------------|-----------------------------|-------------|
| EPT1225300 | 1/2" | 2.8" | 11.8′ | 25 mm² Stranded | 1.1 lb |
| EPT1425350 | 5/8" | 3.0" | 13.8′ | 25 mm² Stranded | 1.1 lb |
| EPT1435350 | 5/8" | 3.0" | 13.8' | 35 mm² Stranded | 1.1 lb |
| EPT1450350 | 5/8" | 3.0" | 13.8' | 50 mm ² Stranded | 1.1 lb |

GROUND ROD SPLIT CLAMP, ROD TO TAPE





FEATURED HIGHLIGHTS


• Used to connect a ground rod to a lug or to tape with a punched hole


Material: Gunmetal

| Part Number | Ground Rod Diameter, Actual | Thread Size | |
|----------------|--------------------------------|----------------|--|
| RCC16 | 0.56" Max | M10 | |
| SRC15 | 0.58" Max | M10 | |

U-BOLT GROUND ROD CLAMP







FEATURED HIGHLIGHTS

- Connects conductors to ground rods
- Listed to UL® 96







| Part Number | Conductor Size, UL | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Depth | Height | Width | Unit Weight |
|----------------|--------------------------------|---------------------------------|--------------------------------|-------|--------|-------|-------------|
| LPC795 | Class 1 - Class 2 (4/0 Max) | 1/2" - 3/4" | 0.504" - 0.681" | 1.66" | 2 1/2" | 2" | 0.242 lb |

GROUND ROD CLAMP







FEATURED HIGHLIGHTS

- Unique stamped body design will not crack as mechanical forces are increased
- · Stainless steel threads will not strip if over-tightened
- Unique internal profile offers pull-out load in excess of four times the UL® 96 requirement
- · Listed to UL® 96


Material: Copper



| Part Number | Conductor Size, UL | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Height | Length | Width | Unit Weight |
|----------------|--------------------------------|---------------------------------|--------------------------------|--------|--------|-------|-------------|
| LPC790 | Class 1 - Class 2 (4/0 Max) | 1/2" - 3/4" | 0.504" - 0.681" | 1.65" | 1 3/4" | 0.94" | 0.336 lb |

COMPRESSION COUPLER FOR COPPER-BONDED GROUND ROD, POINTED





FEATURED HIGHLIGHTS

- Threadless compression coupler for use with pointed copper-bonded ground rods
- Inside of coupler is tapered so ground rod compresses during installation to form an irreversible conductive connection

Material: Steel Finish: Electrogalvanized




| Part Number | Ground Rod Diameter, Nominal | Length | Unit Weight | Complies With |
|----------------|------------------------------|--------|-------------|-----------------|
| CC12F | 1/2" | 2 3/4" | 0.29 lb | |
| CC34 | 3/4" | 2 3/4" | 0.44 lb | IEC® EN 62561-2 |
| CC58 | 5/8" | 2 3/4" | 0.32 lb | IEC® EN 62561-2 |

IEC® EN 62561-2 supercedes EN 50164-2.

COMPRESSION COUPLER FOR GALVANIZED GROUND ROD, POINTED





FEATURED HIGHLIGHTS


- Threadless compression coupler for use with galvanized steel ground rods
- Inside of coupler is tapered so ground rod compresses during installation to form an irreversible conductive connection

Material: Steel Finish: Electrogalvanized

| Part | | | | |
|--------|------------------------------|--------|-------------|--|
| Number | Ground Rod Diameter, Nominal | Length | Unit Weight | |
| GCC34 | 3/4" | 3 1/2" | 0.36 lb | |
| GCC58F | 5/8" | 3" | 0.31 lb | |

COMPRESSION COUPLER FOR STAINLESS STEEL GROUND ROD, POINTED





FEATURED HIGHLIGHTS

- Threadless compression coupler for use with pointed stainless steel ground rods in corrosive soils
- Inside of coupler is tapered so ground rod compresses during installation to form an irreversible conductive connection



Material: Stainless Steel 304 (EN 1.4301)

| Part Number | Ground Rod Diameter, Nominal | Length | Unit Weight | Certifications | |
|----------------|------------------------------|--------|-------------|----------------|--|
| CC34SS | 3/4" | 3 1/4" | 0.34 lb | cULus | |
| CC58SS | 5/8" | 3" | 0.25 lb | cULus | |
| CCSS14 | 14 mm | 2 3/4" | 0.10 lb | | |

THREADED COUPLER FOR COPPER-BONDED GROUND ROD, SECTIONAL



FEATURED HIGHLIGHTS


- High-strength couplings are threaded and chamfered at both ends for easy driving
- Corrosion-resistant couplings ensure permanent, low resistance copper-to-copper connections



| Part Number | Ground Rod Diameter, Nominal | Length | Thread Size | Unit Weight | Certifications | |
|----------------|---------------------------------|--------|-------------|-------------|----------------|--|
| Material: B | ronze | | | | | |
| CR12S | 9/16" | 2.5" | 9/16 UNC | 0.16 lb | CSA, cULus | |
| CR34 | 3/4" | 3.0" | 3/4 UNC | 0.34 lb | CSA, cULus | |
| CR58 | 5/8" | 2.4" | 5/8 UNC | 0.23 lb | CSA, cULus | |
| Material: S | ilicon Bronze | | | | | |
| CR100 | 1" | 3.9" | 1 UNC | 0.78 lb | cULus | |

THREADED COUPLER FOR STAINLESS STEEL GROUND ROD, SECTIONAL





FEATURED HIGHLIGHTS

 Corrosion-resistant couplings ensure permanent, low-resistance connections between ground rods




Material: Stainless Steel 304 (EN 1.4301)

| Material. Otali | idi. Otdinioso oteci oo i (Erv i. 1001) | | | | | | |
|-----------------|---|--------|-------------|-------------|----------------|--|--|
| Part Number | Ground Rod Diameter, Nominal | Length | Thread Size | Unit Weight | Certifications | | |
| CR34SS | 3/4" | 3.06" | 3/4 UNC | 0.40 lb | cULus | | |
| CR58C E | 5/8" | 2.75" | 5/8 UNC | 0.26 lb | | | |
| CR58SS | 5/8" | 3.06" | 5/8 UNC | 0.27 lb | cULus | | |

GROUNDING BUSBAR CONNECTOR, SOLID ROUND CONDUCTOR





FEATURED HIGHLIGHTS

· Used to connect Cu-Bond Round Conductor to grounding busbars


Material: Copper Alloy, Stainless Steel 18-8 (EN 1.4305) Finish: Tinned


| Part Number | Height | Diameter | Hole Size | Thread Size | ERICO CU-BOND Conductor | Complies With |
|----------------|--------|----------|-----------|-------------|----------------------------|---------------|
| BCR8T | 1.56" | 0.79" | 0.37" | M10 | CBSC8 | IEC® 62561-1 |

IEC compliance is valid only for ERICO CU-BOND Conductors listed.

STAMPED BONDING PLATE







FEATURED HIGHLIGHTS

- Stamped bonding plate suitable for structural steel applications
- · Listed to UL® 96




Conductor Size, UL: Class 1 - Class 2 (4/0 Max)


| Part Number | Contact Area | Depth | Height | Width | Hole Size 1 | Hole Size 2 | Unit Weight | |
|--|----------------------|--------|--------|--------|-------------|-------------|-------------|--|
| Material: Copper — Finish: Bare | | | | | | | | |
| LPC540 | 8 in² Min | 2 1/8" | 1 1/4" | 4 1/4" | 0.2" | 0.311" | 0.560 lb | |
| Material: Cop | pper – Finish: Tinne | d | | | | | | |
| LPC540L | 8 in² Min | 2 1/8" | 1 1/4" | 4 1/4" | 0.2" | 0.311" | 0.560 lb | |
| Material: Copper, Aluminum, Stainless Steel 304 (EN 1.4301) — Finish: Bare | | | | | | | | |
| LPC540A | 8 in² Min | 2 1/8" | 1 1/4" | 4 1/4" | 0.2" | 0.311" | 0.230 lb | |

Stainless steel separator included with LPC540A for bi-metallic applications.

BONDING PLATE







FEATURED HIGHLIGHTS

- Cast bonding plate for structural steel applications
- · Listed to UL® 96





Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

| Part Number | Contact Area | Depth | Height | Width | Hole Size | Unit Weight | |
|----------------|-----------------------|--------|--------|--------|-----------|-------------|--|
| Material: Br | ass | | | | | | |
| LPC532 | 8 in² Min | 2 7/8" | 0.66" | 2 7/8" | 5/16" | 0.640 lb | |
| Material: Br | rass — Finish: Tinned | | | | | | |
| LPC532L | 8 in² Min | 2 7/8" | 0.66" | 2 7/8" | 5/16" | 0.640 lb | |

CAST BEAM BONDING CLAMP







FEATURED HIGHLIGHTS

- Clamp for bonding cable to flat metal objects such as I-beams, angle irons and channel irons
- Listed to UL® 96





Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

| 0011440101 0120 | Conductor Gize, CE. Glass 1 Glass 2 (1/0 Max) | | | | | | | |
|-----------------|---|--------|-------|-------------|--|--|--|--|
| Part Number | Flange Thickness | Depth | Width | Unit Weight | | | | |
| Material: Copp | per — Finish: Bare | | | | | | | |
| LPC559 | 1/4" Max | 2 1/4" | 1.6" | 0.385 lb | | | | |
| Material: Copp | Material: Copper — Finish: Tinned | | | | | | | |
| LPC559L | 1/4" Max | 2 1/4" | 1.6" | 0.385 lb | | | | |

CAST TWO BOLT BEAM BONDING CLAMP







FEATURED HIGHLIGHTS

- Clamp for bonding cable to flat metal objects such as I-beams, angle irons and channel irons
- · Listed to UL® 96




Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

| Part Number | Flange Thickness | Depth | Height | Width | Contact Area | Unit Weight |
|----------------|-----------------------|--------|--------|-------|--------------|-------------|
| Material: Co | pper | | | | | |
| LPC557 | 1" Max | 2 3/4" | 2" | 4" | 8 in² Min | 2.055 lb |
| Material: Co | pper – Finish: Tinned | | | | | |
| LPC557L | 1" Max | 2 3/4" | 2" | 4" | 8 in² Min | 2.055 lb |

BEAM CLAMP FOR SOLID ROUND CONDUCTOR





FEATURED HIGHLIGHTS

- Clamp for attaching solid round conductor such as Cu-Bond Round Conductor to flat metal objects such as I-beams, angle irons and channel irons
- For use with copper-bonded, copper, or stainless steel solid conductors

Material: Stainless Steel 316 (EN 1.4401)

| Part Number | Width | Height | Depth | Flange Thickness | ERICO CU-BOND Conductor | Unit Weight | Complies With |
|----------------|-------|--------|-------|---------------------|----------------------------|-------------|---------------|
| SBCS0810 | 2.17" | 3.35" | 2.76" | 1/4" - 1" | CBSC8, CBSC10 | 0.61 lb | IEC® 62561-4 |
| SBCS1314 | 2.17" | 3.54" | 2.76" | 1/4" - 1" | CBSC13, CBSC14 | 0.61 lb | IEC® 62561-4 |

IEC compliance is valid only for Cu-Bond Conductors listed.

PREFABRICATED LUG BOND



FEATURED HIGHLIGHTS

- Made with bare annealed copper cable
- Tinned copper NEMA® lugs welded to the cable with Cadweld connections

Prefabricated lug bonds are custom made to specifications. Common usage includes cable tray bonding and grounding, structure bonds, surge arrester leads and power jumpers.


| B21-2-1L-12 | | |
|-------------|---|---|
| B21 | Lug Bond Assembly | |
| 2 | Lug Configuration | 2 = Double-Lug Bond, 1-Hole each on Straight Lugs 3 = Double-Lug Bond, 2-Holes each on Straight Lugs 6 = Single-Lug Bond Stub, 1-Hole on Straight Lug 7 = Single-Lug Bond Stub, 2-Holes on Straight Lug 8 = Single-Lug Bond Stub, 1-Hole on 45° Lug 9 = Single-Lug Bond Stub, 2-Holes on 45° Lug |
| 1L | Cable Code | 1L = #4 Stranded 1V = #2 Stranded 2C = 1/0 Stranded 2G = 2/0 Stranded 2Q = 4/0 Stranded 2Q = 4/0 Stranded 2V = 250 MCM Stranded |
| 12 | Bond Length in inches (from outer-most hole center) | |

| Part Number | Conductor Size | Number of Wires | Length 1 | Length 2 | Width | Thickness | Hole Size | Angle |
|----------------|-------------------------|--------------------|----------|----------|-------|-----------|-----------|-------|
| Lug Configurat | Lug Configuration: B212 | | | | | | | |
| B2121L8 | #4 Stranded | 7 | 8" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2121V12 | #2 Stranded | 7 | 12" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2122G16 | 2/0 Stranded | 7 | 16" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2122Q00318 | 4/0 Stranded | 7 | 318" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2122Q20 | 4/0 Stranded | 7 | 20" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2122Q24 | 4/0 Stranded | 7 | 24" | 1.47" | 1" | 0.19" | 9/16" | - |
| Lug Configurat | tion: B213 | | | | | | | |
| B2131L15 | #4 Stranded | 7 | 15" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L20 | #4 Stranded | 7 | 20" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L22 | #4 Stranded | 7 | 22" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L24 | #4 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L28 | #4 Stranded | 7 | 28" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L32 | #4 Stranded | 7 | 32" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L35 | #4 Stranded | 7 | 35" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L38 | #4 Stranded | 7 | 38" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L42 | #4 Stranded | 7 | 42" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131L44 | #4 Stranded | 7 | 44" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131V18 | #2 Stranded | 7 | 18" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2131V36 | #2 Stranded | 7 | 36" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132G11 | 2/0 Stranded | 7 | 11" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132G14 | 2/0 Stranded | 7 | 14" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132Q18 | 4/0 Stranded | 7 | 18" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132Q36 | 4/0 Stranded | 7 | 36" | 3.25" | 1" | 0.19" | 9/16" | - |

| Part Number | Conductor Size | Number of Wires | Length 1 | Length 2 | Width | Thickness | Hole Size | Angle |
|----------------|-----------------------|--------------------|----------|----------|-------|-----------|-----------|-------|
| B2132Q48 | 4/0 Stranded | 7 | 48" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132Q54 | 4/0 Stranded | 7 | 54" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132Q60 | 4/0 Stranded | 7 | 60" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2132V18 | 250 kcmil Stranded | 19 | 18" | 3.25" | 1" | 0.19" | 9/16" | - |
| Lug Configurat | ion: B216 | | | | | | | |
| B2162C72 | 1/0 Stranded | 7 | 72" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2162C96 | 1/0 Stranded | 7 | 96" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2162Q24 | 4/0 Stranded | 7 | 24" | 1.47" | 1" | 0.19" | 9/16" | - |
| B2162Q8 | 4/0 Stranded | 7 | 8" | 1.47" | 1" | 0.19" | 9/16" | - |
| Lug Configurat | ion: B217 | | | | | | | |
| B2171L24 | #4 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2172C12 | 1/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2172G24 | 2/0 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2172Q00196 | 4/0 Stranded | 7 | 196" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2172Q12 | 4/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | - |
| B2172Q24 | 4/0 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | - |
| Lug Configurat | ion: B218 | | | | | | | |
| B2182Q30 | 4/0 Stranded | 7 | 30" | 1.47" | 1" | 0.19" | 9/16" | 45° |
| Lug Configurat | ion: B219 | | | | | | | |
| B2192C12 | 1/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | 45° |
| B2192Q08 | 4/0 Stranded | 7 | 8" | 3.25" | 1" | 0.19" | 9/16" | 45° |
| B2192Q12 | 4/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | 45° |

LAY-IN LUG





FEATURED HIGHLIGHTS


- Often used in solar bonding lug applications
- Lay-in features allows for easy positioning
- Set screw hardware made of 304 stainless steel

Material: Copper, Stainless Steel 304 (EN 1.4301) Finish: Tinned



| Part Number | Length | Width | Height | Hole Size | Thread Size | Conductor Size |
|----------------|--------|-------|--------|-----------|-------------|--|
| EL6CADB | 1.04" | 0.39" | 0.76" | 0.22" | 1/4 NF | #14 Solid - #4 Stranded, 2.5 mm² Stranded - 16 mm² Stranded |

SOLAR BONDING LUG

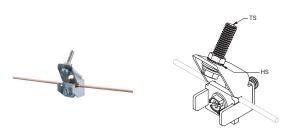

Material: Bronze, Stainless Steel 18-8 (EN 1.4305) Finish: Tinned

FEATURED HIGHLIGHTS


- Bonds the frames and mounting structures of solar photo voltaic systems in accordance with NEC® requirements
- Copper alloy is corrosion resistant and galvanically compatible with copper grounding conductors and aluminum photovoltaic module frames
- Lay-in feature allows for easy positioning along multiple frames



| Part Number | Direct Burial | Conductor Size | Hole Size | Screw Included | Thread Size |
|----------------|---------------|-------------------------|-----------|----------------|-------------|
| EL6CS | No | #14 Solid - #6 Stranded | 0.221" | Yes | 10 UNS |
| EL6CS8 | No | #14 Solid - #6 Stranded | 0.221" | Yes | 8 UNS |
| EL6CSDB | Yes | #14 Solid - #6 Stranded | 0.221" | Yes | 10 UNS |
| EL6CSDB8 | Yes | #14 Solid - #6 Stranded | 0.221" | Yes | 8 UNS |
| EL6CSDBNH | Yes | #14 Solid - #6 Stranded | 0.221" | No | |
| EL6CSNH | No | #14 Solid - #6 Stranded | 0.221" | No | |

TRANSFORMER TANK GROUNDING CONNECTOR WITH ROTATING EYE BOLT





FEATURED HIGHLIGHTS


- · Rotating eye bolt accommodates cable either vertically or horizontally
- Fits all EEI®-NEMA® distribution transformers
- No special tools required; use regular lineman's wrench

Material: Bronze, Stainless Steel 302 (EN 1.4324), Stainless Steel 304 (EN 1.4301)

| Part Number | Conductor Size | Thread Size |
|----------------|--------------------------|-------------|
| TGC2/0 | #10 Solid - 2/0 Stranded | 1/2 UNC |

TRANSFORMER TANK GROUNDING CONNECTOR, EXTERNAL THREAD





FEATURED HIGHLIGHTS


- Fits all EEI®-NEMA® distribution transformers
- · No special tools required; use regular lineman's wrench

Material: Bronze

| Part Number | Conductor Size | Thread Size |
|----------------|-------------------------|-------------|
| Finish: Tinned | | |
| CC207 | #6 Solid - 1/0 Stranded | 1/2 UNC |

TRANSFORMER TANK GROUNDING CONNECTOR, INTERNAL THREAD





FEATURED HIGHLIGHTS


- Fits all EEI®-NEMA® distribution transformers
- No special tools required; use regular lineman's wrench

Material: Bronze, Stainless Steel 304 (EN 1.4301)

| Part Number | Conductor Size | Thread Size |
|----------------|-------------------------|-------------|
| VC207IT | #6 Solid - 1/0 Stranded | 3/8 UNC |

EARTH BOSS





FEATURED HIGHLIGHTS

• Provides preferential equipotential bonding connection point


Material: Stainless Steel 316 (EN 1.4401), Steel


| Part Number | Length | Diameter | Thread Size |
|----------------|--------|----------|-------------|
| 50010EBOSS | 1.97" | 1.97" | M10 |

The surface of the earth boss needs to be cleaned before welding. Welding procedures vary, depending on the type of steel used.

516 PARALLEL CABLE CONNECTOR







FEATURED HIGHLIGHTS

- Cable splice with positive single bolt tension grip on cable or wire
- For use with all full size cables on Class I/II structures
- Listed to UL® 96





Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

| Conductor Size | e, UL: Class 1 - Class 2 (4/ | 'U Max) | | | | | |
|---|------------------------------|---------|-------------|--|--|--|--|
| Part Number | Depth | Width | Unit Weight | | | | |
| Material: Copp | oer — Finish: Bare | | | | | | |
| LPC516 | 1.84" | 1 1/2" | 0.40 lb | | | | |
| Material: Copp | per — Finish: Tinned | | | | | | |
| LPC516L | 1.84" | 1 1/2" | 0.40 lb | | | | |
| Material: Copper, Aluminum, Stainless Steel 18-8 (EN 1.4305) — Finish: Bare | | | | | | | |
| LPC516A | 1.84" | 1 1/2" | 0.26 lb | | | | |
| | | | | | | | |

517 PARALLEL CABLE CONNECTOR







FEATURED HIGHLIGHTS

- Cable splice with positive two bolt tension grip on cable or wire
- For use with all full size cables on Class I/II structures
- · Listed to UL® 96


Conductor Size, UL: Class 1 - Class 2 (4/0 Max)




| Part Number | Depth | Width | Unit Weight | | | |
|-----------------------------------|-------|-------|-------------|--|--|--|
| Material: Copper | | | | | | |
| LPC517 | 1.91" | 1.66" | 0.514 lb | | | |
| Material: Copper — Finish: Tinned | | | | | | |
| LPC517L | 1.91" | 1.66" | 0.514 lb | | | |

CABLE CLAMP







FEATURED HIGHLIGHTS

- Clamps to flat metal objects such as I-beams, angle irons and channel irons
- Can be used as a parallel conductor clamp
- Positive bolt tension draws tight on steel member to UL® 96
- Listed to UL® 96

Conductor Size, UL: Class 1 - Class 2 (4/0 Max), Secondary





| Part Number | Flange Thickness | Depth | Width | Unit Weight | |
|-------------------------|------------------|-------|-------|-------------|--|
| Material: Brass | | | | | |
| LPC858 | 1/2" Max | 1.66" | 0.89" | 0.240 lb | |
| Material: Brass — Finis | sh: Tinned | | | | |
| LPC858L | 1/2" Max | 1.66" | 0.89" | 0.240 lb | |

Flange thickness will impact the maximum cable holding capability.

STAMPED BOLTED PARALLEL CABLE CONNECTOR







FEATURED HIGHLIGHTS

- For positive bolt tension cable clamping
- · Listed to UL® 96

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)




| Part Number | Depth | Height | Width | Unit Weight |
|---------------------------|-----------------------------|-----------|-------|-------------|
| Material: Copper | | | | |
| LPC502 | 1 1/2" | 1 1/2" | 1.78" | 0.215 lb |
| Material: Copper — Finish | n: Tinned | | | |
| LPC502L | 1 1/2" | 1 1/2" | 1.78" | 0.215 lb |
| Material: Copper, Alumin | um, Stainless Steel 304 (EN | l 1.4301) | | |
| LPC502A | 1 1/2" | 1 1/2" | 1.78" | 0.194 lb |

Stainless steel separator included with LPC502A for bi-metallic applications.

JUMPER CLAMP FOR TELECOM





FEATURED HIGHLIGHTS

• For use in telecom applications

Material: Bronze Finish: Tinned





| Part Number | Width | Thread Size | Conductor Size |
|----------------|-------|-------------|----------------|
| KUL | 1.4" | 5/16 UNC | #6 Solid |

Although a #6 Solid conductor is similar in size to a metric 16 mm² Solid conductor, the UL listing is currently only for #6 Solid.

CROSS-RUN CABLE CONNECTORS, SOLID ROUND CONDUCTOR







FEATURED HIGHLIGHTS

- Can be used as a cross-run cable connector
- Four bolts for positive bolt tension grip on
- For use with Cu-Bond Round Conductors

Material: Brass


| Part Number | Depth | Height | Width | ERICO CU-BOND Conductor | Unit Weight | Complies With |
|----------------|-------|--------|-------|----------------------------|-------------|---------------|
| LPC595NB | 2" | 1" | 2" | CBSC8, CBSC10 | 0.62 lb | IEC® 62561-1 |

IEC compliance is valid only for Cu-Bond Conductors listed.

T-CONNECTOR








FEATURED HIGHLIGHTS

• For 90° conductor connections

| Part Number | Conductor Size | Depth | Height | Width | ERICO CU-BOND Conductor | Unit Weight | Complies With |
|----------------|-------------------------|-------|--------|-------|----------------------------|-------------|---------------|
| Material: B | rass | | | | | | |
| CTR8CU | 8 mm Solid, 10 mm Solid | 0.83" | 1.81" | 1.58" | CBSC10 | 0.37 lb | IEC® 62561-1 |
| Material: Z | inc Alloy | | | | | | |
| CTR10 | 8 mm Solid, 10 mm Solid | 0.80" | 1.92" | 1.04" | | 0.26 lb | |

IEC compliance is valid only for Cu-Bond Conductors listed.

IN-LINE CABLE CONNECTOR

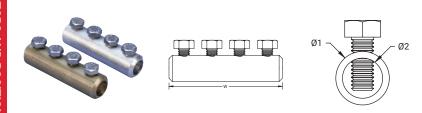

FEATURED HIGHLIGHTS

- Cable splicer with four bolts for pressure on each cable
- LPC513 is compatible with Cu-Bond **Round Conductors**



Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

| Part Number | Diameter 1 | Diameter 2 | Width | Cu-Bond Conductor | Unit Weight | Complies With |
|------------------|------------------|------------|--------|-----------------------|-------------|---------------|
| Material: Copper | | | | | | |
| LPC513 | 3/4" | 0.563" | 3 1/4" | CBSC8, CBSC10, CBSC13 | 0.37 lb | IEC® 62561-1 |
| Material: Copper | – Finish: Tinned | | | | | |
| LPC513L | 3/4" | 0.563" | 3 1/4" | | 0.37 lb | |

IEC compliance is valid only for ERICO CU-BOND Conductors listed.

MESH BONDING NETWORK CONNECTOR, MBNC240



For complete pedestal clamp assembly, reference part MBNUPCJ240

FEATURED HIGHLIGHTS

- Allows for fast, simple and economical field connection of grounding and bonding wires
- Heavy duty clamps with stainless steel hardware are suitable for direct burial
- Can accommodate additional pigtails that can be used to connect to building steel and equipment
- Can be combined with Universal Pedestal Clamp for bonding to various pedestal sizes for mesh bonding networks



Material: Copper, Stainless Steel 304 (EN 1.4301)

| Part Number | Conductor Size | Cu-Bond Conductor | Complies With | Standard Packaging Quantity |
|----------------|---|-----------------------|---------------|--------------------------------|
| MBNC240 | #2 Solid - 4/0 Stranded, 35 mm² - 100 mm² | CBSC8, CBSC10, CBSC13 | IEC® 62561-1 | 25 pc |

IEC compliance is valid only for Cu-Bond Conductors listed.

MESH BONDING NETWORK CONNECTOR, MBNC240A





For complete pedestal clamp assembly, reference part number MBNUPCJ240

FEATURED HIGHLIGHTS

- · Allows for fast, simple and economical field connection of grounding and bonding wires
- Heavy duty clamps with stainless steel hardware are suitable for direct burial
- · Can be combined with Universal Pedestal Clamp for bonding to various pedestal sizes for mesh bonding networks




Material: Copper, Stainless Steel 304 (EN 1.4301)

| Part | | |
|----------|---|-----------------------------|
| Number | Conductor Size | Standard Packaging Quantity |
| MBNC240A | #2 Solid - 4/0 Stranded, 35 mm² - 100 mm² | 25 pc |

MESH BONDING NETWORK CONNECTOR, MBNC82





For complete pedestal clamp assembly, reference part number MBNUPJ82

FEATURED HIGHLIGHTS

- · Allows for fast, simple and economical field connection of grounding and bonding wires
- · Heavy duty clamps with stainless steel hardware are suitable for direct burial
- Can accommodate additional pigtails that can be used to connect to building steel and equipment
- Can be combined with Universal Pedestal Clamp for bonding to various pedestal sizes for mesh bonding networks




Material: Bronze, Stainless Steel 304 (EN 1.4301)

| Part | | |
|--------|--|-----------------------------|
| Number | Conductor Size | Standard Packaging Quantity |
| MBNC82 | #8 Solid - #2 Stranded, 10 mm² Solid - 35 mm² Stranded | 25 pc |

SRG CONNECTOR





FEATURED HIGHLIGHTS

- Allows for fast, simple and economical field connection of grounding and bonding wires
- Heavy duty clamps with stainless steel hardware are suitable for direct burial
- Can accommodate additional pigtails that can be used to connect to building steel and equipment
- Can be combined with Universal Pedestal Clamp for bonding to various pedestal sizes for mesh bonding networks




Material: Bronze, Stainless Steel 304 (EN 1.4301)

| Part Number | Conductor Size |
|----------------|---|
| SRGC46 | #6 Solid - #4 Stranded, 16 mm² Stranded |

SPLIT BOLT CONNECTOR





FEATURED HIGHLIGHTS

- Unplated high-strength silicon bronze accommodates copper to copper connections
- Tin plated, high-strength copper alloy split bolt with spacer separates dissimilar conductors and accommodates copper-tocopper, copper-to-aluminum and aluminumto-aluminum connections


Material: Silicon Bronze



| Part | | |
|------------------|---|----------------|
| Number | Conductor Size | Certifications |
| Tin Plating: No | | |
| ESB2 | #6 Solid - #2 Stranded, 16 mm² Stranded - 25 mm² Stranded | cULus |
| ESB2/0 | #2 Solid - 2/0 Stranded, 35 mm² Stranded - 50 mm² Stranded | UL |
| ESB4 | #8 Solid - #4 Solid, 10 mm² Stranded - 16 mm² Stranded | cULus |
| ESB4/0 | 1/0 Solid - 250 kcmil Stranded, 70 mm² Stranded - 120 mm² Stranded | |
| ESB6 | #10 Solid - #6 Stranded, 6 mm² Stranded - 10 mm² Stranded | cULus |
| ESB8 | #16 Stranded - #8 Stranded, 1.5 mm² Stranded - 6 mm² Stranded | cULus |
| Tin Plating: Yes | | |
| ESBP1/0 | #6 Solid - 1/0 Stranded, 16 mm² Stranded - 50 mm² Stranded | UL |
| ESBP2 | #8 Solid - #2 Stranded, 10 mm² Stranded - 25 mm² Stranded | UL |
| ESBP2/0 | #8 Solid - 2/0 Stranded, 10 mm² Stranded - 50 mm² Stranded | UL |
| ESBP350 | 3/0 Stranded - 350 kcmil Stranded, 95 mm² Stranded - 150 mm² Stranded | |
| ESBP4 | #8 Solid - #3 Stranded, 10 mm² Stranded - 25 mm² Stranded | UL |
| ESBP4/0 | #4 Stranded - 250 kcmil Stranded, 25 mm² Stranded - 120 mm² Stranded | |
| ESBP6 | #10 Stranded - #6 Stranded, 6 mm² Stranded - 10 mm² Stranded | UL |
| ESBP8 | #14 Stranded - #8 Stranded, 2.5 mm² Stranded - 6 mm² Stranded | UL |

VISE CLAMP





FEATURED HIGHLIGHTS


• Used to splice two conductors together

Material: Bronze

| Part Number | Conductor Size |
|----------------|--|
| VC62 | #6 Solid - #2 Solid, 16 mm² Solid - 25 mm² Solid |

VISE CLAMP FOR TELECOM





FEATURED HIGHLIGHTS


- Used to bond messenger wire to ground tap conductors
- When clamp is tightened, the piercing teeth puncture the insulation on the messenger wire, forming a positive ground connection without stripping the cable

Material: Copper Alloy, Stainless Steel 304 (EN 1.4301) Finish: Tinned

| Part Number | Height | Width | Depth | Diameter | Thread Size | Unit Weight |
|----------------|--------|--------|-------|-----------------|-------------|-------------|
| EVC167P | 1 5/8" | 1 1/4" | 1" | 0.146" - 0.312" | 5/16 UNC | 0.21 lb |

MULTI-PURPOSE GROUNDING CLAMP, STAINLESS STEEL





FEATURED HIGHLIGHTS

- Convenient multi-purpose clamp designed to accommodate round conductors, flat conductors, ground rods and rebar
- Stainless steel material with inner plate allows compatibility between most dissimilar metals

Material: Stainless Steel 304 (EN 1.4301)


Conductor Size: 35 mm² Stranded - 50 mm² Stranded, #2 Stranded - 1/0 Solid


Tape Size: 40 x 4 mm Max

| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Rebar Size, Metric | Rebar Size, US | Rebar Size, Canada | Length | Width |
|----------------|---------------------------------|--------------------------------|-----------------------|----------------|-----------------------|--------|-------|
| MPSC404SS | 5/8" - 3/4" | 0.561" - 0.750" | 16 – 20 mm | #5 - #6 | 15M - 20M | 2.6" | 2.6" |

UNIVERSAL CLAMP, SOLID ROUND CONDUCTOR







FEATURED HIGHLIGHTS

• For parallel connections of Cu-Bond Round Conductor

Material: Brass

| Part Number | Depth | Width | ERICO CU-BOND Conductor | Unit Weight | Complies With | |
|----------------|--------|--------|-------------------------|-------------|---------------|--|
| LPC466B | 1 1/4" | 2 1/2" | CBSC10, CBSC13 | 0.615 lb | IEC® 62561-1 | |

IEC compliance is valid only for ERICO CU-BOND Conductors listed.

WATER PIPE GROUND CLAMP





FEATURED HIGHLIGHTS

- High-strength silicone bronze
- Used for connecting copper conductors to metallic water pipe or ground rods





| Part Number | Pipe Size, Nominal | Conductor Size | Certifications |
|-----------------|--------------------|---|----------------|
| Material: Silio | con Bronze | | |
| CWP1JJ | 1/2" - 1" | #10 Solid - #4 Stranded, 6 mm² Stranded - 16 mm² Stranded | |
| CWP1JU | 1/2" - 1" | #10 Solid - #2 Stranded, 6 mm² Stranded - 25 mm² Stranded | CSA, cULus |
| CWP2JU | 1 1/4" - 2" | #10 Solid - #2 Stranded, 6 mm² Stranded - 25 mm² Stranded | CSA, cULus |
| CWP4J | 2 1/2" - 4" | #10 Solid - #4 Stranded, 6 mm² Stranded - 16 mm² Stranded | CSA, cULus |
| CWP6J | 4 1/2" - 6" | #10 Solid - #4 Stranded, 6 mm² Stranded - 16 mm² Stranded | CSA |
| Material: Zind | c Alloy | | |
| ZWP1J | 1/2" - 1" | #10 Solid - #6 Solid, 6 mm² Stranded - 10 mm² Stranded | cULus |

Optional copper screw for use in direct burial applications.

WATER/GAS PIPE GROUND CLAMP





FEATURED HIGHLIGHTS

- High-strength silicone bronze
- Used for connecting copper conductors to metallic water pipe, ground rods, or flexible gas pipe (CSST) with brass hex fittings
- Conform to the requirements of the 2009 edition of NFPA® 54, NFGC® (National Fuel Gas Code) and NEC® (National Electric Code) for bonding corrugated stainless steel tubing (CSST) gas piping systems to the grounding conductor of the building's electrical system
- SH version for outdoor applications







Material: Silicon Bronze

| Part Number | Pipe Size, Nominal | Hex Width | Conductor Size | Certifications |
|----------------|--------------------|-----------------|---|----------------|
| For Outdoor | | | | |
| CWP1J | 1/2" - 1" | 1" - 1 1/4" | #10 Solid - #2 Solid, 6 mm² Solid - 25 mm² Stranded | CSA, cULus |
| CWP2J | 1 1/4" - 2" | 1 1/2" - 2 1/8" | #10 Solid - #2 Stranded, 6 mm² Stranded - 25 mm² Stranded | CSA, cULus |
| CWP3J | 2 1/2" - 4" | 2 1/2" - 3 1/8" | #10 Solid - #4 Stranded, 6 mm² Stranded - 16 mm² Stranded | cULus |
| For Outdoor | Use: Yes | | | |
| CWP1JSH | 1/2" - 1" | 1" - 1 1/4" | #10 Solid - #2 Stranded, 6 mm² Stranded - 25 mm² Stranded | cULus |
| CWP2JSH | 1 1/4" - 2" | 1 1/2" - 2 1/8" | #10 Solid - #2 Stranded, 6 mm² Solid - 25 mm² Stranded | cULus |
| CWP3JSH | 2 1/2" - 4" | 2 1/2" - 3 1/8" | #10 Solid - #4 Stranded, 6 mm² Stranded - 16 mm² Stranded | cULus |

CAST PIPE CLAMP







FEATURED HIGHLIGHTS

- Clamp for bonding horizontal or vertical pipes to the lightning protection system
- Listed to UL® 96





Conductor Size, UL: Class 1 - Class 2 (4/0 Max), Secondary

| Part Number | Outer Diameter | Depth | Width | Unit Weight | |
|----------------------------------|----------------|--------|--------|-------------|--|
| Material: Brass — F | inish: Bare | | | | |
| LPC580 | 0.75" - 1.32" | 1 1/2" | 2 3/4" | 0.59 lb | |
| Material: Brass — Finish: Tinned | | | | | |
| LPC580L | 0.75" - 1.32" | 1 1/2" | 2 3/4" | 0.59 lb | |

CAST U-BOLT PIPE CLAMP







FEATURED HIGHLIGHTS

- Clamp for bonding conductor to handrails, pipes and rebar to lightning protection system
- Listed to UL® 96





Conductor Size, UL: Class 1 - Class 2 (4/0 Max), Secondary

| Part Number Material: Brass — Fi | Outer Diameter | Depth | Height | Width | Unit Weight |
|--|----------------|-------|--------|-------|-------------|
| LPC570 | 0.68" - 1.50" | 1.8" | 3" | 2.67" | 0.715 lb |
| Material: Brass — Finish: Tinned | | | | | |
| LPC570L | 0.68" - 1.50" | 1.8" | 3" | 2.67" | 0.715 lb |

NOTCHED CAST U-BOLT PIPE CLAMP







FEATURED HIGHLIGHTS

- Clamp for bonding of handrails and pipes to the lightning protection system
- Notched hole makes assembly easy and eliminates loose hardware
- Listed to UL® 96



Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

| Part Number | Outer Diameter | Depth | Height | Width | Unit Weight | |
|-----------------------------------|----------------|-------|--------|-------|-------------|--|
| Material: Aluminum — Finish: Bare | | | | | | |
| LPA571 | 2" - 2 1/2" | 1.96" | 3 1/2" | 3.63" | 0.400 lb | |
| Material: Brass - | – Finish: Bare | | | | | |
| LPC571 | 2" - 2 1/2" | 1.96" | 3 1/2" | 3.63" | 0.835 lb | |
| Material: Brass — Finish: Tinned | | | | | | |
| LPC571L | 2" - 2 1/2" | 1.96" | 3 1/2" | 3.63" | 0.835 lb | |

PIPE TO RIGID CONDUIT GROUND CLAMP





FEATURED HIGHLIGHTS


• For use in grounding rigid conduit systems to metallic water pipe

Material: Bronze

| Part Number | Water Pipe Size | Rigid Conduit Size | Conductor Size |
|----------------|-----------------|--------------------|--------------------------|
| CWP1JH12 | 1/2" - 1" | 1/2" | #10 Solid - #6 Solid |
| CWP1JH34 | 1/2" - 1" | 3/4" | #10 Solid - 2/0 Stranded |
| CWP2JH34 | 1 1/4" - 2" | 3/4" | #10 Solid - 2/0 Stranded |
| CWP2JH44 | 1 1/4" – 2" | 1" | #10 Solid - 3/0 Stranded |
| CWP4JH34 | 2 1/2" – 4" | 3/4" | #10 Solid - 2/0 Stranded |

STAMPED U-BOLT PIPE CLAMP







FEATURED HIGHLIGHTS


- Clamp for bonding of pipes and exhaust stacks to the lightning protection system
- Listed to UL® 96




| Part Number | Outer Diameter | Depth | Height | Width | Unit Weight |
|-------------------|---------------------------|--------|----------|--------|-------------|
| Material: Copper, | Stainless Steel 304 (EN 1 | .4301) | | | |
| LPC5964 | 3.900" - 4.625" | 2" | 5 13/16" | 6.250" | 0.885 lb |
| LPC5966 | 0.438" - 6.858" | 2" | 8 13/16" | 8.313" | 0.820 lb |

STAMPED U-BOLT PIPE CLAMP, 90°







FEATURED HIGHLIGHTS

- · Clamp for bonding of pipes, handrails and exhaust stacks to the lightning protection system
- · Listed to UL® 96

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)



| Part Number | Outer Diameter | Depth | Height | Width | Unit Weight |
|------------------------|--------------------------|-------|--------|--------|-------------|
| Material: Copper, Stai | nless Steel 304 (EN 1.43 | 301) | | | |
| LPC5962 | 1.900" - 2.625" | 2" | 3.625" | 4.675" | 0.515 lb |
| LPC5963 | 2.630" - 3.630" | 2" | 4.693" | 5.500" | 0.763 lb |

THIN WALL PIPE GROUND CLAMP ASSEMBLY



FEATURED HIGHLIGHTS

- Tinned copper strap draws tightly around pipe
- All hardware is included
- Includes emery cloth and anti-oxidant compound
- Conductor stub is easily spliced to ground conductor
- Cadweld connection of conductor to strap eliminates a mechanical interface


Material: Copper, Silicon Bronze


Finish: Tinned

| Part Number | Width | Water Pipe Size | Conductor Size | Cable Length |
|----------------|-------|-----------------|----------------|--------------|
| B852A12C1G96 | 2" | 3" - 12" | #6 Solid | 96' |
| B852A12C2Q60 | 2" | 3" - 12" | 4/0 Concentric | 60' |
| B852A8C1G48 | 2" | 3" - 8" | #6 Solid | 48' |
| B852A8C1G96 | 2" | 3" - 8" | #6 Solid | 96' |

CABLE/POINT PIPE SUPPORT







- Clamp for bonding horizontal or vertical pipes to the lightning protection system
- May be used as a vertical support for air terminals
- Listed to UL® 96



| Part Number | Diameter | Outer Diameter | Depth | Width | Unit Weight | |
|--------------------------------|---------------|----------------|--------|-------|-------------|--|
| Material: Brass — Finish: Bare | | | | | | |
| LPC330 | 3/8" | 1.40" - 1.75" | 1 5/8" | 3.5" | 0.790 lb | |
| LPC331 | 3/8" | 1.85" - 2.75" | 1 5/8" | 3.9" | 0.835 lb | |
| Material: Brass — F | inish: Tinned | | | | | |
| LPC330L | 3/8" | 1.40" - 1.75" | 1 5/8" | 3.5" | 0.790 lb | |
| LPC331L | 3/8" | 1.85" - 2.75" | 1 5/8" | 3.9" | 0.835 lb | |

FENCE CLAMP, ONE CONDUCTOR





Material: Bronze, Stainless Steel 304 (EN 1.4301) Finish: Tinned

FEATURED HIGHLIGHTS

- Theft-deterrent appearance
- Stainless steel hardware included
- Tin plating minimizes the risk of corrosion
- The clamp accepts the conductor either in parallel or at right angles to the pipe




| 1 1111011. 111 | IIICa | | | | | |
|----------------|-----------------------------|--|---|----------------------|---------------|----------------|
| Part Number | Fence Post Size, Nominal | Fence Post Outside Diameter, Actual | Conductor Size | Cu-Bond Conductor | Complies With | Certifications |
| FC073 | 1 1/2" | 1.90" | #4 Solid - 2/0 Stranded, 16 mm² Stranded - 70 mm² Stranded | | | |
| FC074 | 1 1/2" | 1.90" | 2/0 Solid - 250 kcmil Stranded, 50 mm² Stranded - 120 mm² Stranded | | | |
| FC075 | 2" | 2.38" | #4 Solid - 2/0 Stranded, 16 mm² Stranded - 70 mm² Stranded | CBSC8 | IEC® 62561-1 | cULus |
| FC076 | 2" | 2.38" | 2/0 Solid - 250 kcmil Stranded, 50 mm² Stranded - 120 mm² Stranded | CBSC10, CBSC13 | IEC® 62561-1 | |
| FC078 | 2 1/2" | 2.88" | 2/0 Solid - 250 kcmil Stranded, 16 mm² Stranded - 120 mm² Stranded | | | |
| FC079 | 3" | 3.50" | #4 Solid - 2/0 Stranded, 16 mm² Stranded - 70 mm² Stranded | | | |
| FC080 | 3" | 3.50" | 2/0 Solid - 250 kcmil Stranded, 50 mm² Stranded - 120 mm² Stranded | | | |
| FC082 | 3 1/2" | 4.00" | #4 Solid - 2/0 Stranded, 16 mm² Stranded - 120 mm² Stranded | | | |

IEC compliance is valid only for Cu-Bond Conductors listed.

FENCE CLAMP, TWO CONDUCTORS





FEATURED HIGHLIGHTS

- Theft-deterrent appearance
- · Stainless steel hardware included
- Tin plating minimizes the risk of corrosion

Material: Copper Alloy, Stainless Steel 304 (EN 1.4301) Finish: Tinned



| Part Number | Fence Post Size, Nominal | Fence Post Outside Diameter, Actual | Conductor Size |
|-------------|--------------------------|-------------------------------------|--|
| FC076DH | 2" | 2.38" | 2/0 Solid - 250 kcmil Stranded, 50 mm² Stranded - 120 mm² Stranded |
| FC078DH | 2 1/2" | 2.88" | 2/0 Solid - 250 kcmil Stranded, 16 mm² Stranded - 120 mm² Stranded |
| FC082DH | 3 1/2" | 4.00" | #4 Solid - 2/0 Stranded, 16 mm² Stranded - 120 mm² Stranded |

FENCE CLAMP FOR FIELD-WELDED CONNECTIONS





Material: Electrolytic Copper

Finish: Tinned

• Ideal for when Cadweld connections cannot be made

- to aluminum pipe or thin-wall steel tube
- · Stainless steel hardware included

FEATURED HIGHLIGHTS

· Can be used when field-welding conductors

| Part Number | Fence Post Size, Nominal | Fence Post Outside Diameter, Actual |
|-------------|--------------------------|-------------------------------------|
| B522B | 1 1/4" | 1.66" |
| B522C | 1 1/2" | 1.90" |
| B522D | 2" | 2.38" |
| B522E | 2 1/2" | 2.88" |
| B522F | 3" | 3.50" |
| B522G | 3 1/2" | 4.00" |
| B522H | 4" | 4.50" |
| B522K | 6" | 6.63" |

FLEXIBLE JUMPER FOR FENCE AND GATE GROUNDING

FEATURED HIGHLIGHTS



- Used to bond gates, switch operating handles and any other item where movement or vibration requires a flexible grounding jumper
- Multi-stranded insulated ropelay conductor provides flexibility and strand protection
- · Swaged ends of jumper allow larger conductor to fit in the same mold as concentric conductor
- Connections are made with Cadweld exothermic connections using the same mold required for other fence post connections

| Part Number | Article Number | Color Code Ring |
|-------------|---------------------------|---|
| FJ | Flexible Jumper | |
| 2Q | Cable Code | #2 Solid = 1T 2/0 Stranded = 2G 4/0 Stranded = 2Q |
| 24 | Length of Jumper (inches) | |

Material: Copper, Polyethylene Rubber

| Part Number | Cable Code | Conductor Size | Cable Length |
|-------------|------------|----------------|--------------|
| FJ1T18 | 1T | #2 Solid | 18" |
| FJ1T24 | 1T | #2 Solid | 24" |
| FJ1T240 | 1T | #2 Solid | 240" |
| FJ1T42 | 1T | #2 Solid | 42" |
| FJ1T96 | 1T | #2 Solid | 96" |
| FJ2G12 | 2G | 2/0 Stranded | 12" |
| FJ2G120 | 2G | 2/0 Stranded | 120" |
| FJ2G132 | 2G | 2/0 Stranded | 132" |
| FJ2G144 | 2G | 2/0 Stranded | 144" |
| FJ2G16 | 2G | 2/0 Stranded | 16" |
| FJ2G168 | 2G | 2/0 Stranded | 168" |
| FJ2G18 | 2G | 2/0 Stranded | 18" |

| Part Number | Cable Code | Conductor Size | Cable Length |
|-------------|------------|----------------|--------------|
| FJ2G180 | 2G | 2/0 Stranded | 180" |
| FJ2G228 | 2G | 2/0 Stranded | 228" |
| FJ2G24 | 2G | 2/0 Stranded | 24" |
| FJ2G30 | 2G | 2/0 Stranded | 30" |
| FJ2G36 | 2G | 2/0 Stranded | 36" |
| FJ2G360 | 2G | 2/0 Stranded | 360" |
| FJ2G72 | 2G | 2/0 Stranded | 72" |
| FJ2G84 | 2G | 2/0 Stranded | 84" |
| FJ2G96 | 2G | 2/0 Stranded | 96" |
| FJ2Q120 | 2Q | 4/0 Stranded | 120" |
| FJ2Q156 | 2Q | 4/0 Stranded | 156" |
| FJ2Q16 | 2Q | 4/0 Stranded | 16" |
| FJ2Q168 | 2Q | 4/0 Stranded | 168" |
| FJ2Q18 | 2Q | 4/0 Stranded | 18" |
| FJ2Q180 | 2Q | 4/0 Stranded | 180" |
| FJ2Q216 | 2Q | 4/0 Stranded | 216" |
| FJ2Q24 | 2Q | 4/0 Stranded | 24" |
| FJ2Q240 | 2Q | 4/0 Stranded | 240" |
| FJ2Q252 | 2Q | 4/0 Stranded | 252" |
| FJ2Q36 | 2Q | 4/0 Stranded | 36" |
| FJ2Q384 | 2Q | 4/0 Stranded | 384" |
| FJ2Q48 | 2Q | 4/0 Stranded | 48" |
| FJ2Q600 | 2Q | 4/0 Stranded | 600" |
| FJ2QA24 | 2Q | 4/0 Stranded | 24" |

PREFABRICATED FENCE CLAMP ASSEMBLY WITH SINGLE GROUND LEAD



FEATURED HIGHLIGHTS

- Ideal for when Cadweld connections cannot be made to aluminum pipe or thin-wall steel tube
- Stainless steel hardware included
- Available in either left or right-hand orientation

Material: Copper, Polyethylene Rubber

| A235-D-2G-2-RH | | |
|----------------|------------------------------|--|
| A235 | Series | |
| D | Nominal Pipe Size (inches) | B = 1 1/4" C = 1 1/2" D = 2" E = 2 1/2" F = 3" G = 3-1/2" H = 4" |
| 2G | Ground Lead Cable Code (AWG) | 2C = 1/0 Stranded 2G = 2/0 Stranded 2Q = 4/0 Stranded |
| 2 | Ground Lead Length (feet) | |
| RH | Ground Lead Side | LH = Left Hand RH = Right Hand |

Material: Copper, Stainless Steel 18-8 (EN 1.4305), Stainless Steel 304 (EN 1.4301)

Finish: Tinned

| Part Number | Fence Post Size, Nominal | Fence Post Outside Diameter, Actual | Ground Lead Conductor Size | Ground Lead Length |
|-------------------|--------------------------|-------------------------------------|-----------------------------------|--------------------|
| Orientation: Left | Hand | | | |
| A235C2C1LH | 1 1/2" | 1.90" | 1/0 Str | 1' |
| A235D2G4LH | 2" | 2.38" | 2/0 Str | 4' |
| A235D2Q4LH | 2" | 2.38" | 4/0 Str | 4' |
| A235D2Q5LH | 2" | 2.38" | 4/0 Str | 5' |
| A235E2G4LH | 2 1/2" | 2.88" | 2/0 Str | 4' |
| A235E2Q4LH | 2 1/2" | 2.88" | 4/0 Str | 4' |
| A235E2Q5LH | 2 1/2" | 2.88" | 4/0 Str | 5' |
| A235F2C2LH | 3" | 3.50" | 1/0 Str | 2' |
| Orientation: Righ | t Hand | | | |
| A235D2G2RH | 2" | 2.38" | 2/0 Str | 2' |
| A235D2Q4RH | 2" | 2.38" | 4/0 Str | 4' |
| A235D2Q5RH | 2" | 2.38" | 4/0 Str | 5' |
| A235E2Q2RH | 2 1/2" | 2.88" | 4/0 Str | 2' |
| A235E2Q5RH | 2 1/2" | 2.88" | 4/0 Str | 5' |
| A235G2Q2RH | 3 1/2" | 4.00" | 4/0 Str | 2' |
| A235H2C10RH | 4" | 4.50" | 1/0 Str | 10' |

Right hand orientation shown in diagram.

PREFABRICATED GATE JUMPER ASSEMBLY



FEATURED HIGHLIGHTS

- Ideal for when Cadweld connections cannot be made to aluminum pipe or thin-wall steel tube
- Jumper conductor is insulated
- Stainless steel hardware included
- Available in either left or right-hand orientation

| A238-EB-2S-12-LH | | |
|------------------|-------------------------------------|--|
| A238 | Series | |
| EB | Clamp Code | EB = 2 1/2" Gate, 1 1/4" Post EC = 2 1/2" Gate, 1 1/2" Post FB = 3" Gate, 1 1/4" Post FC = 3" Gate, 1 1/2" Post GB = 3 1/2" Gate, 1 1/4" Post GC = 3 1/2" Gate, 1 1/2" Post HB = 4" Gate, 1 1/4" Post HC = 4" Gate, 1 1/2" Post |
| 2S | 4/0 AWG Flexible Jumper Designation | |
| 12 | Jumper Length (inches) | |
| LH | Jumper Side | LH = Left Hand RH = Right Hand |

Material: Copper, Stainless Steel 18-8 (EN 1.4305), Stainless Steel 304 (EN 1.4301)


Finish: Tinned

| Part Number | Fixed Gate Diameter, Nominal | Fixed Gate Diameter, Actual | Post Frame Diameter, Nominal | Post Frame Diameter, Actual | Jumper Conductor Size | Jumper Length |
|---------------------|------------------------------|--------------------------------|---------------------------------|--------------------------------|--------------------------|----------------|
| Orientation: Left H | | Diameter, Actual | Diameter, Normal | Diameter, Actual | Conductor Cize | odinper Length |
| A238EB2S12LH | 2 1/2" | 2.88" | 1 1/4" | 1.66" | 4/0 Str | 12" |
| A238EC2S12LH | 2 1/2" | 2.88" | 1 1/2" | 1.90" | 4/0 Str | 12" |
| A238EC2S24LH | 2 1/2" | 2.88" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238FC2S12LH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 12" |
| A238FC2S16LH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 16" |
| A238FC2S18LH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 18" |
| A238FC2S24LH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238FD2S18LH | 3" | 3.50" | 2" | 2.38" | 4/0 Str | 18" |
| A238GC2S12LH | 3 1/2" | 4.00" | 1 1/2" | 1.90" | 4/0 Str | 12" |
| A238GC2S18LH | 3 1/2" | 4.00" | 1 1/2" | 1.90" | 4/0 Str | 18" |
| A238GC2S24LH | 3 1/2" | 4.00" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238HB2S18LH | 4" | 4.50" | 1 1/4" | 1.66" | 4/0 Str | 18" |
| A238HC2S24LH | 4" | 4.50" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238KC2S24LH | 6" | 6.63" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| | | | | | | |
| A238EC2S12RH | 2 1/2" | 2.88" | 1 1/2" | 1.90" | 4/0 Str | 12" |
| A238EC2S24RH | 2 1/2" | 2.88" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238FC2S12RH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 12" |
| A238FC2S16RH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 16" |
| A238FC2S18RH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 18" |
| A238FC2S24RH | 3" | 3.50" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238FD2S18RH | 3" | 3.50" | 2" | 2.38" | 4/0 Str | 18" |
| A238FF2S12RH | 3" | 3.50" | 3" | 3.50" | 4/0 Str | 12" |
| A238GC2S12RH | 3 1/2" | 4.00" | 1 1/2" | 1.90" | 4/0 Str | 12" |
| A238GC2S18RH | 3 1/2" | 4.00" | 1 1/2" | 1.90" | 4/0 Str | 18" |
| A238GC2S24RH | 3 1/2" | 4.00" | 1 1/2" | 1.90" | 4/0 Str | 24" |

| Part Number | Fixed Gate Diameter, Nominal | Fixed Gate Diameter, Actual | Post Frame Diameter, Nominal | Post Frame Diameter, Actual | Jumper Conductor Size | Jumper Length |
|--------------|---------------------------------|--------------------------------|---------------------------------|--------------------------------|--------------------------|---------------|
| A238GD2S24RH | 3 1/2" | 4.00" | 2" | 2.38" | 4/0 Str | 24" |
| A238HB2S18RH | 4" | 4.50" | 1 1/4" | 1.66" | 4/0 Str | 18" |
| A238HD2S24RH | 4" | 4.50" | 2" | 2.38" | 4/0 Str | 24" |
| A238KC2S24RH | 6" | 6.63" | 1 1/2" | 1.90" | 4/0 Str | 24" |
| A238KD2S24RH | 6" | 6.63" | 2" | 2.38" | 4/0 Str | 24" |

[&]quot;Fixed gate" refers to the pipe on the fence itself, while "post frame" refers to the post on the swinging door.Left hand orientation shown in diagram.

PREFABRICATED GATE JUMPER ASSEMBLY WITH GROUND LEADS

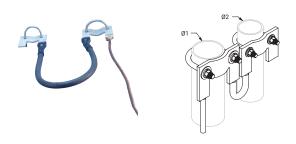

FEATURES

- Ideal for when Cadweld connections cannot be made to aluminum pipe or thin-wall steel tube
- Jumper conductor is insulated
- Stainless steel hardware included
- Available in either left or right-hand orientation

| A239-EB-2S-24-2Q-4-RH | | |
|-----------------------|-------------------------------------|--|
| A239 | Series | |
| EB | Clamp Code | EB = 2 1/2" Gate, 1 1/4" Post EC = 2 1/2" Gate, 1 1/2" Post FB = 3" Gate, 1 1/4" Post FC = 3" Gate, 1 1/2" Post GB = 3 1/2" Gate, 1 1/4" Post GC = 3 1/2" Gate, 1 1/2" Post HB = 4" Gate, 1 1/4" Post HC = 4" Gate, 1 1/2" Post |
| 2S | 4/0 AWG Flexible Jumper Designation | |
| 24 | Jumper Length (inches) | |
| 2Q | Ground Lead Cable Code (AWG) | 2C = 1/0 Stranded 2G = 2/0 Stranded 2Q = 4/0 Stranded 9F = Copper-Clad Steel #9, 19-Strand |
| 4 | Ground Lead Length (feet) | |
| RH | Ground Lead Side | LH = Left Hand RH = Right Hand |

Material: Copper, Stainless Steel 18-8 (EN 1.4305), Stainless Steel 304 (EN 1.4301) Finish: Tinned

| Part Number | Fixed Gate Diameter, Nominal | Fixed Gate Diameter, Actual | Post Frame Diameter, Nominal | Post Frame Diameter, Actual | Jumper Conductor Size | Jumper Length | Ground Lead Conductor Size | Ground Lead Length |
|------------------------|------------------------------------|-----------------------------------|------------------------------------|-----------------------------------|-----------------------------|------------------|----------------------------------|-----------------------|
| Orientation: Left Hand | | | | | | | | |
| A239DC2S242C4LH | 2" | 2.38" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 4' |
| A239EC2S182Q6LH | 2 1/2" | 2.88" | 1 1/2" | 1.9" | 4/0 Str | 18" | 4/0 Str | 6' |
| A239EC2S242C4LH | 2 1/2" | 2.88" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 4' |
| A239EC2S242G8LH | 2 1/2" | 2.88" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 8' |
| A239EC2S242Q4LH | 2 1/2" | 2.88" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239FC2S242C2LH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 2' |
| A239FC2S242G4LH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 4' |
| A239FC2S242G5LH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 5' |
| A239FC2S242Q10L | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 10' |
| A239FC2S242Q2LH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 2' |
| A239FC2S242Q4LH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239FC2S242Q8LH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 8' |

| Part Number | Fixed Gate Diameter, Nominal | Fixed Gate Diameter, Actual | Post Frame Diameter, Nominal | Post Frame Diameter, Actual | Jumper Conductor Size | Jumper Length | Ground Lead Conductor Size | Ground Lead Length |
|-------------------------|------------------------------------|-----------------------------------|------------------------------------|-----------------------------------|-----------------------------|------------------|----------------------------------|-----------------------|
| A239FD2S241V1LH | 3" | 3.50" | 2" | 2.4" | 4/0 Str | 24" | #2 Str | 1' |
| A239FD2S242G4LH | 3" | 3.50" | 2" | 2.4" | 4/0 Str | 24" | 2/0 Str | 4' |
| A239GC2S242Q4LH | 3 1/2" | 4.00" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239HC2S182C5LH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 18" | 1/0 Str | 5' |
| A239HC2S182Q6LH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 18" | 4/0 Str | 6' |
| A239HC2S242C10L | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 10' |
| A239HC2S242C4LH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 4' |
| A239HC2S242G30L | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 30' |
| A239HC2S242G4LH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 4' |
| A239HC2S242G5LH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 5' |
| A239HC2S242Q2LH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 2' |
| A239HD2S242Q2LH | 4" | 4.50" | 2" | 2.4" | 4/0 Str | 24" | 4/0 Str | 2' |
| A239HD2S242Q5LH | 4" | 4.50" | 2" | 2.4" | 4/0 Str | 24" | 4/0 Str | 5' |
| Orientation: Right Hand | | | | | | | | |
| A239EB2S242Q4RH | 2 1/2" | 2.88" | 1 1/4" | 1.7" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239EC2S242C4RH | 2 1/2" | 2.88" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 4' |
| A239EC2S242Q4RH | 2 1/2" | 2.88" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239FC2S122G24R | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 12" | 2/0 Str | 24' |
| A239FC2S242C2RH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 2' |
| A239FC2S242G4RH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 4' |
| A239FC2S242G5RH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 5' |
| A239FC2S242Q4RH | 3" | 3.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239FD2S242G4RH | 3" | 3.50" | 2" | 2.4" | 4/0 Str | 24" | 2/0 Str | 4' |
| A239GC2S242Q4RH | 3 1/2" | 4.00" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 4' |
| A239HB2S242Q1RH | 4" | 4.50" | 1 1/4" | 1.7" | 4/0 Str | 24" | 4/0 Str | 1' |
| A239HC2S182C5RH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 18" | 1/0 Str | 5' |
| A239HC2S242C10R | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 10' |
| A239HC2S242C4RH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 1/0 Str | 4' |
| A239HC2S242G30R | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 30' |
| A239HC2S242G5RH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 2/0 Str | 5' |
| A239HC2S242Q2RH | 4" | 4.50" | 1 1/2" | 1.9" | 4/0 Str | 24" | 4/0 Str | 2' |
| A239HD2S242Q2RH | 4" | 4.50" | 2" | 2.4" | 4/0 Str | 24" | 4/0 Str | 2' |
| A239HD2S242Q5RH | 4" | 4.50" | 2" | 2.4" | 4/0 Str | 24" | 4/0 Str | 5' |
| A239KD2S242Q4RH | 6" | 4.50" | 2" | 2.4" | 4/0 Str | 24" | 4/0 Str | 4' |

[&]quot;Fixed gate" refers to the pipe on the fence itself, while "post frame" refers to the post on the swinging door. Left hand orientation shown in diagram.

REBAR GROUNDING CLAMP, PARALLEL



Material: Bronze, Stainless Steel 304 (EN 1.4301) Connection Type: Parallel

FEATURED HIGHLIGHTS

- Universal use for rebar, rods or pipes
- Lay-in feature cuts installation time
- Bronze alloy construction with Stainless Steel 304 screws
- Approved for direct burial in earth and concrete

Conductor Size: Rebar Size, Canada Part Number Ground Rod Diameter, Actual **Water Pipe Size** Rebar Size, Metric Rebar Size, US 10M - 25M 0.5" - 1.0" 1/2" - 1" 12 - 25 mm #4 - #8

EK16

REBAR GROUNDING CLAMP, PERPENDICULAR





Material: Bronze, Stainless Steel 304 (EN 1.4301)

Connection Type: Perpendicular

Conductor Size:

FEATURED HIGHLIGHTS

- Universal use for rebar, rods or pipes
- · Lay-in feature cuts installation time
- Bronze alloy construction with Stainless Steel 304 screws
- · Approved for direct burial in earth and concrete




| Part Number | Ground Rod Diameter, Actual | Water Pipe Size | Rebar Size, Metric | Rebar Size, US | Rebar Size, Canada |
|-------------|-----------------------------|-----------------|--------------------|----------------|--------------------|
| EK17 | 0.5" - 1.0" | 1/2" - 1" | 12 – 25 mm | #4 - #8 | 10M - 25M |

REBAR GROUNDING CLAMP, HEAVY DUTY








- Provides two connection points to concrete encased electrodes (rebar) for states where the Authority Having Jurisdiction (AHJ) requires it
- Meets 2005 NEC® standard requirement for bonding to rebar into the grounding system
- Has high-strength bronze alloy construction
- Easy to install




| Part Number | Rebar Size, Metric | Rebar Size, US | Rebar Size, Canada |
|--------------------|---|--------------------|--------------------|
| Conductor Size: #8 | 8 Solid - 2/0 Stranded, 10 mm² Stranded | - 70 mm² Stranded | |
| RC70 | 8 – 18 mm | #3 - #6 | 10M - 20M |
| Conductor Size: # | 8 Solid - 4/0 Stranded, 10 mm² Stranded | - 100 mm² Stranded | |
| RC100 | 18 – 36 mm | #6 - #11 | 20M - 35M |

REBAR BONDING CLAMP







FEATURED HIGHLIGHTS

• Provides bond from lightning protection system to rebar



Material: Brass Conductor Size, UL: Class 2 (4/0 Max)



| Part Number | Rebar Size, Canada | Rebar Size, Metric | Rebar Size, US | Depth | Width | Unit Weight |
|-------------|--------------------|--------------------|----------------|--------|--------|-------------|
| LPC466 | 10M Max | 29 mm Max | #9 Max | 1 1/4" | 2 1/2" | 0.615 lb |

ARC WELDABLE BOND



FEATURED HIGHLIGHTS


- 19-strand concentric cable flash-welded to steel rod for a bonding connection to structural steel and to rebar
- Economical alternative to exothermic welding when only a few connections need to be made and an arc welder is available on site
- Rod is sized to match the ampacity of the cable for fault currents

Material: Copper, Steel

| Part Number | Conductor Size | Cable Length | Rod Size | Rod Length |
|-------------|-----------------|--------------|----------|------------|
| EWB2G9164 | 2/0 Stranded | 4' | 9/16" | 8" |
| EWB2L584 | 3/0 Stranded | 4' | 5/8" | 8" |
| EWB2Q344 | 4/0 Stranded | 4' | 3/4" | 8" |
| EWBCS701 | 70 mm² Stranded | 3' | 1/2" | 8" |

UNIVERSAL PEDESTAL CLAMP WITH CABLE MANAGEMENT, MBNUPCJ240





For individual connector, reference part number MBNC240A

Material: Copper, Steel, Stainless Steel 304 (EN 1.4301) Finish: nVent CADDY Armour, Electrogalvanized


FEATURED HIGHLIGHTS

- Only one attachment required for both mesh bonding and cable management
- Eliminates the need for separate mounting brackets for different pedestal types or sizes
- Stainless steel construction of bracket and hardware reduces potential for galvanic corrosion
- Mesh bonding conductors do not have to bend around each pedestal to conform to grid pattern
- Suitable for round or square pedestals

| Part Number | Conductor Size | Pedestal Size | Standard Packaging Quantity |
|-------------|---|---------------------------|-----------------------------|
| MBNUPCJ240 | #2 Solid - 4/0 Stranded, 35 mm² - 100 mm² | 7/8" - 2" Round or Square | 25 pc |

UNIVERSAL PEDESTAL CLAMP WITH CABLE MANAGEMENT, MBNUPCJ82





For individual connector, reference part number MBNC82

FEATURED HIGHLIGHTS

- Only one attachment required for both mesh bonding and cable management
- Eliminates the need for separate mounting brackets for different pedestal types or sizes
- Stainless steel construction of bracket and hardware reduces potential for galvanic corrosion
- Mesh bonding conductors do not have to bend around each pedestal to conform to grid pattern
- Suitable for round or square pedestals

Material: Copper, Steel, Stainless Steel 304 (EN 1.4301) Finish: nVent CADDY Armour, Electrogalvanized



| Part Number | Conductor Size | Pedestal Size | Standard Packaging Quantity |
|-------------|--|---------------------------|-----------------------------|
| MBNUPCJ82 | #8 Solid - #2 Stranded, 10 mm² Solid - 35 mm² Stranded | 7/8" - 2" Round or Square | 25 pc |

SRG CONNECTOR PEDESTAL MOUNTING BRACKET



FEATURED HIGHLIGHTS

- Only one attachment required for both mesh bonding and cable management
- Eliminates the need for separate mounting brackets for different pedestal types or sizes
- Stainless steel construction of bracket and hardware reduces potential for galvanic corrosion
- Mesh bonding conductors do not have to bend around each pedestal to conform to grid pattern
- Suitable for round or square pedestals


C UL US


Material: Stainless Steel 304 (EN 1.4301), Bronze

| Part Number | Pedestal Size | Standard Packaging Quantity |
|-------------|-----------------------|-----------------------------|
| SRGC46BR | 7/8" Square; 1" Round | 10 pc |

COMMON BONDING NETWORK JUMPER







FEATURED HIGHLIGHTS

- Helps to achieve a secure electrical connection in telecommunications
- Stranded wire allows for small radius bends
- Tinned copper lug and hardware included

Material: Steel, Copper Finish: Electrogalvanized, Tinned Number of Wires: 7 Insulation: Green Insulated Conductor

| Part Number | Length | Width | A | Thickness | Hole Size | Slot Size | Angle | Conductor Size | Cable Length | Standard Packaging Quantity |
|-------------|--------|-------|-------|-----------|-----------|---------------|-------|----------------|--------------|--------------------------------|
| CBNJ09 | 1.27" | 0.48" | 0.57" | 0.08" | 0.27" | 0.27" x 0.40" | 45° | #6 Stranded | 9' | 25 pc |
| CBNJ09P10 | 1.27" | 0.48" | 0.57" | 0.08" | 0.27" | 0.27" x 0.40" | 45° | #6 Stranded | 9' | 5 x 10 pc |

COPPER LUG MECHANICAL CONNECTOR



FEATURED HIGHLIGHTS

- Simple to use and install
- Suitable for telecom and equipotential bonding applications




Material: Copper

| Part Number | Conductor Size | Thread Size | Hole Size |
|-------------|---|-------------|-----------|
| EL4 | #14 Solid - #4 Stranded, 2.5 mm ² Stranded - 16 mm ² Stranded | 5/16 UNF | 0.3" |


FLUSH MOUNT POSITIONER, SOLID ROUND CONDUCTOR

FEATURED HIGHLIGHTS



• For use with copper-bonded, copper, or stainless steel solid conductors






Material: Stainless Steel 18-8 (EN 1.4305), Stainless Steel 316 (EN 1.4401)

| Part Number | Width 1 | Width 2 | Height 1 | Height 2 | Depth | Cu-Bond Conductor | Unit Weight | Complies With |
|-------------|---------|---------|----------|----------|-------|-------------------|-------------|---------------|
| CSS0810000 | 3.74" | 3.15" | 0.79" | 0.2" | 0.67" | CBSC8, CBSC10 | 0.2 kg | IEC® 62561-4 |
| CSS1314000 | 3.74" | 3.15" | 0.79" | 0.2" | 0.67" | CBSC13, CBSC14 | 0.2 kg | IEC® 62561-4 |
| CSS1618000 | 3.74" | 3.15" | 0.98" | 0.2" | 0.67" | CBSC16, CBSC18 | 0.2 kg | IEC® 62561-4 |

IEC compliance is valid only for Cu-Bond Conductors listed.

50 MM OFFSET POSITIONER, SOLID ROUND CONDUCTOR

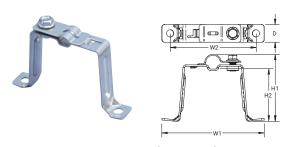

FEATURED HIGHLIGHTS


- Positioning clamps with 50 mm (1.97") offset for use with solid round conductors, including Cu-Bond Round Conductor
- For use with copper-bonded, copper, or stainless steel solid conductors

Material: Stainless Steel 18-8 (EN 1.4305), Stainless Steel 316 (EN 1.4401)

| Part Number | Width 1 | Width 2 | Height 1 | Height 2 | Depth | Cu-Bond Conductor | Unit Weight | Complies With |
|-------------|---------|---------|----------|----------|-------|-------------------|-------------|---------------|
| CSS0810050 | 3.94" | 3.15" | 2.56" | 1.97" | 0.67" | CBSC8, CBSC10 | 0.24 lb | IEC® 62561-4 |
| CSS1314050 | 3.94" | 3.15" | 2.56" | 1.97" | 0.67" | CBSC13, CBSC14 | 0.24 lb | IEC® 62561-4 |
| CSS1618050 | 3.94" | 3.15" | 2.75" | 1.97" | 0.67" | CBSC16, CBSC18 | 0.24 lb | IEC® 62561-4 |

IEC compliance is valid only for Cu-Bond Conductors listed.

150 MM OFFSET POSITIONER, SOLID ROUND CONDUCTOR



FEATURED HIGHLIGHTS

- Positioning clamps with 150 mm (5.9") offset for use with solid round conductors, including Cu-Bond Round Conductor
- · For use with copper-bonded, copper, or stainless steel solid conductors
- Ideal for use in positioning solid round conductor in a horizontal orientation, such as on a roof or parapet


Material: Stainless Steel 18-8 (EN 1.4305), Stainless Steel 316 (EN 1.4401)

| Part Number | Width 1 | Width 2 | Height 1 | Height 2 | Depth | Cu-Bond Conductor | Unit Weight | Complies With |
|-------------|---------|---------|----------|----------|-------|--------------------------|-------------|---------------|
| CSS0810150 | 2.17" | 1" | 7.28" | 5.9" | 0.67" | CBSC8, CBSC10 | 0.29 kg | IEC® 62561-4 |
| CSS1314150 | 2.17" | 1" | 7.28" | 5.9" | 0.67" | CBSC13, CBSC14 | 0.29 kg | IEC® 62561-4 |

IEC compliance is valid only for Cu-Bond Conductors listed.

THEFT DETERRENT COMPOSITE CABLE CLIP





FEATURED HIGHLIGHTS


• For use with CC5A04 Theft Deterrent Composite Cable

Material: Aluminum

| Part Number | Conductor Size | Hole Size |
|-------------|---|-----------|
| CCL04A | #14 Solid - 2/0 Solid, 2.5 mm² Stranded - 10 mm² Stranded | 0.2" |

Conductors

CU-BOND ROUND CONDUCTOR

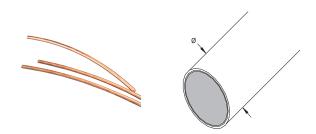

For decades, nVent ERICO has provided the market with high quality copper-bonded ground rods. nVent ERICO has taken that same concept in ground rods and made this into a revolutionary new grounding conductor. The core of the nVent ERICO Cu-Bond Round Conductor is a low carbon steel grade for improved flexibility in the field. The steel core is plated with nickel then electro-plated with a coating of copper. This electro-plating process helps ensure a long-lasting molecular bond between the copper layer and the steel.

Material: Copper-Bonded Steel Plating Thickness: 10 mil

Complies With: IEC® 62305-3 Edition 2; IEC® 62561-2; EN 62561-2

FEATURED HIGHLIGHTS

- Theft-deterrent: steel core is hard to cut with hand tools
- Cost-effective; copper bonded to a steel core minimizes the amount of copper in the cable
- · Superior corrosion resistance; application life of typically 30-40 years in most soil conditions
- · Copper-bonded coating will not crack or tear when the conductor is bent
- High resistance to corrosion and provides a low-resistance path to ground
- Cu-Bond Round Conductor is marked every meter (3.28') for easy measurement in the field
- Meets the requirements of IEC® 62305-3 Edition 2 and IEC/EN 62561-2 for lightning protection applications
- · Cu-Bond Round Conductors are UL certified to IEC® 62561-2



| · | • | * | | | |
|----------------|----------|--------|--------------------------------|---------------------------|-------------|
| Part Number | Diameter | Length | Fusing Capacity Equivalency | Cadweld Conductor Code | Unit Weight |
| CBSC10 | 0.39" | 328' | #2 | T2 | 139.4 lb |
| CBSC10A | 0.39" | 82' | #2 | T2 | 34.9 lb |
| CBSC10B | 0.39" | 164' | #2 | T2 | 69.7 lb |
| CBSC13 | 0.52" | 328' | 1/0 | ТЗ | 239.0 lb |
| CBSC13A | 0.52" | 82' | 1/0 | Т3 | 59.8 lb |
| CBSC13B | 0.52" | 164' | 1/0 | ТЗ | 119.5 lb |
| CBSC14 | 0.56" | 328' | 2/0 | T4 | 277.7 lb |
| CBSC14A | 0.56" | 82' | 2/0 | T4 | 69.4 lb |
| CBSC14B | 0.56" | 164' | 2/0 | T4 | 138.9 lb |
| CBSC16 | 0.62" | 328' | 3/0 | T5 | 332.5 lb |
| CBSC16A | 0.62" | 82' | 3/0 | T5 | 83.1 lb |
| CBSC16B | 0.62" | 164' | 3/0 | T5 | 166.3 lb |
| CBSC18 | 0.70" | 328' | 4/0 | Т6 | 427.0 lb |
| CBSC18A | 0.70" | 82' | 4/0 | Т6 | 106.8 lb |
| CBSC18B | 0.70" | 164' | 4/0 | Т6 | 213.5 lb |
| CBSC8 | 0.31" | 328' | #4 | T1 | 86.6 lb |
| CBSC8A | 0.31" | 82' | #4 | T1 | 21.7 lb |
| CBSC8B | 0.31" | 164' | #4 | T1 | 43.3 lb |
| | | | | | |

Resistance per unit length measurements made in mΩ/m, CBSC compared with respect to AWG/Metric.The IEEE® 837 standard (Annex C) provides a method of calculating the fusing current for conductors. This chart is a reference of the calculations for copper-bonded steel conductor according to the IEEE 837 standard. This information is for reference only.

CONDUCTOR PHYSICAL SIZE COMPARISON

| Conductor Size | Approximate Diameter | Approximate Diameter | Cross Section | Cross Section |
|----------------|-------------------------|-------------------------|----------------------|------------------------|
| #4 AWG | 0.235" | 5.97 mm | - | - |
| 25 mm² | 0.266" | 6.76 mm | - | - |
| #2 AWG | 0.292" | 7.42 mm | - | - |
| 35 mm² | 0.301" | 7.65 mm | - | |
| CBSC8 | 0.315" | 8 mm | 0.08 in ² | 50.27 mm ² |
| 50 mm² | 0.35" | 8.89 mm | - | - |
| 1/0 AWG | 0.373" | 9.47 mm | - | - |
| CBSC10 | 0.394" | 10 mm | 0.12 in ² | 78.52 mm ² |
| 2/0 AWG | 0.419" | 10.64 mm | - | - |
| 70 mm² | 0.421" | 10.69 mm | - | |
| 3/0 AWG | 0.41" | 10.4 mm | - | - |
| 95 mm² | 0.49" | 12.47 mm | - | |
| CBSC13 | 0.52" | 13.2 mm | 0.21 in ² | 138.07 mm² |
| 4/0 AWG | 0.528" | 13.41 mm | - | |
| CBSC14 | 0.56" | 14.2 mm | 0.25 in ² | 158.90 mm ² |
| 120 mm² | 0.56" | 14.22 mm | - | - |
| 250 MCM | 0.575" | 14.61 mm | - | - |
| CBSC16 | 0.618" | 15.7 mm | 0.31 in ² | 199.84 mm² |
| 150 mm² | 0.62" | 15.75 mm | - | - |
| 300 MCM | 0.629" | 15.98 mm | - | - |
| 185 mm² | 0.695" | 17.65 mm | - | - |
| CBSC18 | 0.697" | 17.7 mm | 0.38 in ² | 243.27 mm ² |
| | | | | |

CONDUCTIVITY COMPARISON

| Part Number | AWG (Ω/km) | CBSC Resistance per Length Comparison | mm² (Ω/km) | CBSC Resistance per Length Comparison |
|-------------|------------|--|--------------------|--|
| 000010 | 1/0 AWG | 118.52% | 50 mm² | 110.82% |
| CBSC18 | 2 AWG | 74.54% | 35 mm² | 77.57% |
| OD0016 | 2 AWG | 102.20% | 35 mm² | 106.36% |
| CBSC16 | 4 AWG | 64.27% | 25 mm² | 75.97% |
| ODC014 | 2 AWG | 137.78% | 25 mm² | 102.42% |
| CBSC14 | 4 AWG | 86.65% | 16 mm² | 65.55% |
| OD0010 | 2 AWG | 134.46% | 25 mm² | 99.95% |
| CBSC13 | 4 AWG | 84.56% | 16 mm² | 63.97% |
| OBCO10 | 4 AWG | 132.25% | 16 mm² | 100.05% |
| CBSC10 | 6 AWG | 83.17% | 10 mm² | 62.53% |
| 2000 | 6 AWG | 107.85% | 16 mm² | 129.73% |
| CBSC8 | 8 AWG | 67.83% | 10 mm ² | 81.08% |

| Fusing Current I rms (kA) - IEEE® 837 A | nnex C | | | | | | |
|--|--------|---------|---------|---------|---------|---------|---------|
| Conductor Type Copper-bonded, Steel Core, Rod a | | CBSC8 | CBSC10 | CBSC13 | CBSC14 | CBSC16 | CBSC18 |
| Conductor Cross Section in mm 2 | А | 50.265 | 78.52 | 138.07 | 158.903 | 199.84 | 243.27 |
| Initial Conductor Temperature in °C | Та | 40 | 40 | 40 | 40 | 40 | 40 |
| Time of Current Flow in Seconds | t c | 2 | 2 | 2 | 2 | 2 | 2 |
| Maximum Allowable Temperature in °C | Tm | 1084 | 1084 | 1084 | 1084 | 1084 | 1084 |
| Thermal Coefficient of Resistivity at | | | | | | | |
| Reference Temperature T r | ar | 0.00378 | 0.00378 | 0.00378 | 0.00378 | 0.00378 | 0.00378 |
| Resistivity of the Ground Conductor at | | | | | | | |
| Reference Temperature T r in m&-cm | rr | 8.621 | 8.621 | 8.621 | 8.621 | 8.621 | 8.621 |
| 1/a 0 or (1/a r)-T r in °C | K 0 | 245 | 245 | 245 | 245 | 245 | 245 |
| Thermal Capacity Factor in Joules/cm 3 /°C | TCAP | 3.846 | 3.846 | 3.846 | 3.846 | 3.846 | 3.846 |
| Material Conductivity (%) | % | 24.5 | 20.4 | 18.8 | 15.9 | 16.3 | 17.7 |
| Fusing Current Calculation | ß | 84.73 | 84.73 | 84.73 | 84.73 | 84.73 | 84.73 |
| | 1 | 4.79 | 7.48 | 13.16 | 15.15 | 19.05 | 23.19 |
| | I 90% | 4.31 | 6.74 | 11.84 | 13.63 | 17.14 | 20.87 |
| | I 80% | 3.83 | 5.99 | 10.53 | 12.12 | 15.24 | 18.55 |

CU-BOND ROUND CONDUCTOR MANUAL STRAIGHTENING TOOL




- Hand tool used to reduce curvature in Cu-Bond Round Conductor
- Can be used with Cu-Bond Round Conductors CBSC8, CBSC10, and CBSC13

| Part Number | Length |
|-------------|---------|
| EGRA15 | 53 1/2" |

CU-BOND ROUND CONDUCTOR POWERED STRAIGHTENING TOOL



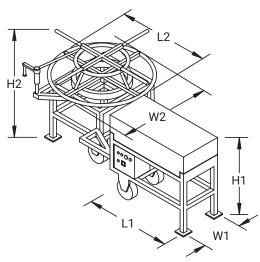

FEATURED HIGHLIGHTS

- · Operates on 220/240V (single phase) or 110/120V with step-up transformer included on **CBSCSSMT**
- Two operating modes: Automatic with speed control and manual forward/reverse
- Interchangeable rollers allow the machine to straighten CBSC8, CBSC10, and CBSC13
- Manual straightening bar straightens the first few sections of Cu-Bond Round Conductor prior to feeding it into the machine
- Enclosure covers moving internal parts
- · Safety switch for emergency shutoff
- Includes control rod to calibrate setup of the straightening machine
- · Designed to be able to be moved on site by a forklift
- Wheels and collapsible handles allow for easy movement on the jobsite
- · Add-on uncoiler holds Cu-Bond Round Conductor coils and provides a method of feeding material into the machine and gives repeatable and precise straightness results

| Part Number | Length 1 | Length 2 | Width 1 | Width 2 | Height 1 | Height 2 | Operating Voltage | Unit Weight |
|----------------|----------|----------|---------|---------|----------|----------|---------------------|-------------|
| CBSCSSM | 43 1/4" | 44 1/2" | 20" | 44 1/2" | 39 1/4" | 40" | 220/240V | 507 lb |
| CBSCSSMT | 43 1/4" | 44 1/2" | 20" | 44 1/2" | 39 1/4" | 40" | 110/120V - 220/240V | 507 lb |

Spare parts are available for order. Contact your nVent ERICO representative for more information.

CU-BOND COMPOSITE CABLE



Cu-Bond is a bare concentric stranded conductor that consists of peripheral tinned copper plated steel which protects and conceals the internal copper stranding.

Material: Copper, Copper-Bonded Steel Finish: Tinned Insulated: No

FEATURED HIGHLIGHTS


- Outer strands comprised of tinned copper-bonded steel for theft deterrence and improved corrosion resistance
- Inner copper stranding is tinned for superior corrosion resistance
- Copper stranding inside of conductor increases conductivity and conductor flexibility
- Copper strands are hidden by outer galvanized steel strands
- Available in three sizes/configurations with electrical equivalency to 4, 2/0 and 4/0 AWG copper
- Suitable for direct burial applications
- More flexible and easier to work with than copper clad steel conductors

| Part Number | Stranding | Resistance | Fusing Capacity Equivalency | Cable Diameter | Cable Length | Conductor Code | Hammerlock | Unit Weight |
|----------------|--|---------------|--------------------------------|-------------------|-----------------|-------------------|-----------------------|----------------|
| CC5A05CB | (19) Strands: (3) Tinned Copper, (16) Tin Plated Copper-Bonded Steel | 0.374 Ω/1000' | #4 | 0.320" | 250′ | S1 | EHL58C2G, EHL34C2G | 61 lb |
| CC5A20CB | (154) Strands: (133) Tinned Copper, (21) Tin Plated Copper-Bonded Steel | 0.087 Ω/1000′ | 2/0 | 0.524" | 200' | S5 | | 113 lb |
| CC5A40CB | (161) Strands: (133) Tinned Copper, (27) Tinned Copper- Bonded Steel | 0.056 Ω/1000' | 4/0 | 0.651" | 200' | S7 | | 174 lb |

Weight does not include reel.

INSULATED COPPER CONDUCTOR





FEATURED HIGHLIGHTS

- Insulated copper conductor is compacted, so the diameter is smaller than conventional insulated copper conductor
- Green and yellow insulation protects the strands of the conductor

Material: Copper, Polyvinylchloride


| Part Number | Conductor Size | Number of Wires | Wire Diameter | Cable Diameter | Outer Diameter | Cable Length | Insulation Thickness | Unit Weight |
|----------------|-----------------------|--------------------|------------------|-------------------|-------------------|-----------------|-------------------------|----------------|
| Conductosr - | Гуре: Concentric, Com | pacted | | | | | | |
| ICECH120C | 120 mm² Stranded | 24 | 0.11" | 0.508" | 0.63" | 1,640' | 0.04" | 1,279 lb |
| ICECH150C | 150 mm² Stranded | 30 | 0.11" | 0.557" | 0.70" | 1,640' | 0.04" | 1,698 lb |
| ICECH185C | 185 mm² Stranded | 37 | 0.11" | 0.624" | 0.78" | 1,640' | 0.04" | 2,315 lb |
| ICECH240C | 240 mm² Stranded | 37 | 0.11" | 0.719" | 0.89" | 1,640' | 0.04" | 3,009 lb |

| Part Number | Conductor Size | Number of Wires | Wire Diameter | Cable Diameter | Outer Diameter | Cable Length | Insulation Thickness | Unit Weight |
|----------------|-----------------------|--------------------|------------------|-------------------|-------------------|-----------------|-------------------------|----------------|
| ICECH50C | 50 mm² Stranded | 10 | 0.11" | 0.321" | 0.43" | 164' | 0.04" | 57 lb |
| ICECH70C | 70 mm² Stranded | 14 | 0.11" | 0.380" | 0.49" | 1,640' | 0.04" | 794 lb |
| ICECH95C | 95 mm² Stranded | 19 | 0.11" | 0.447" | 0.57" | 1,640' | 0.04" | 1,080 lb |
| Conductor T | ype: Concentric, Non- | Compacted | | | | | | |
| ICECH25 | 25 mm² Stranded | 7 | 0.90" | 0.230" | 0.33" | 164' | 0.04" | 29 lb |

Outer diameter dimensions are approximate.

NON-INSULATED SOLID CONDUCTOR





FEATURED HIGHLIGHTS

- · Solid cable for a variety of applications
- Available in smaller spool sizes for convenience
- LPA and LPC parts are used for lightning protection system downconductor or grounding applications




| Part | | | | | | |
|-----------------|------------------|---------------|----------------|----------|-------------|----------------|
| Number | Length | Cross Section | Conductor Size | Diameter | Unit Weight | Certifications |
| Material: Coppe | er — Finish: Ba | re | | | | |
| A809A06F100 | 100' | 41.70 kcmil | #4 Solid | 0.204" | 0.038 lb | |
| LPC151250 | 250' | 26.24 kcmil | #6 Solid | 0.161" | 0.024 lb | UL |
| LPC151CTO | | 26.24 kcmil | #6 Solid | 0.161" | 0.024 lb | UL |
| LPC154CTO | | 66.36 kcmil | #2 Solid | 0.325" | 0.062 lb | UL |
| RCEC6 | 328' | 55.80 kcmil | 6 mm² Solid | 0.236" | 0.050 lb | |
| Material: Coppe | er – Finish: Tir | ned | | | | |
| LPC154LCTO | | 66.36 kcmil | #2 Solid | 0.325" | 0.062 lb | UL |

Unit weight is per foot (0.3048 m). Cut-to-order (CTO) lengths are available for an additional charge.

NON-INSULATED STRANDED CONDUCTOR





- Stranded pure electrolytic copper cable conductors for a variety of applications
- Stranded grounded conductor cut into standard lengths for easy field installation

Material: Copper Conductor Type: Concentric


| Part Number | Number of Wires | Wire Diameter | Diameter | Length | Cross Section | Conductor Size | Unit Weight |
|----------------|--------------------|---------------|----------|--------|---------------|------------------|-------------|
| A800A09F100 | 19 | 0.084" | 0.500" | 100' | 133.0 kcmil | 2/0 Stranded | 41.1 lb |
| A800A09F65 | 19 | 0.084" | 0.500" | 65' | 133.0 kcmil | 2/0 Stranded | 26.7 lb |
| A800A22F100 | 19 | 0.106" | 0.528" | 100' | 211.6 kcmil | 4/0 Stranded | 65.0 lb |
| SCEC120 | 37 | 0.079" | 0.560" | 1,640' | 236.8 kcmil | 120 mm² Stranded | 1,135.0 lb |

| Part Number | Number of Wires | Wire Diameter | Diameter | Length | Cross Section | Conductor Size | Unit Weight |
|----------------|--------------------|---------------|----------|--------|---------------|-----------------------------|-------------|
| SCEC150 | 37 | 0.089" | 0.620" | 1,640' | 296.0 kcmil | 150 mm² Stranded | 1,466.0 lb |
| SCEC185 | 37 | 0.099" | 0.695" | 1,640' | 365.1 kcmil | 185 mm² Stranded | 1,843.0 lb |
| SCEC25 | 7 | 0.084" | 0.253" | 164' | 49.3 kcmil | 25 mm² Stranded | 25.0 lb |
| SCEC35 | 7 | 0.099" | 0.301" | 164' | 69.1 kcmil | 35 mm² Stranded | 25.0 lb |
| SCEC50 | 19 | 0.070" | 0.350" | 164' | 98.7 kcmil | 50 mm ² Stranded | 51.0 lb |
| SCEC95 | 19 | 0.099" | 0.496" | 1,640' | 187.5 kcmil | 95 mm² Stranded | 936.0 lb |

Outer diameter dimensions are approximate.

CPI GROUNDING AND BONDING BRAID, STAINLESS STEEL





High-quality CPI stainless steel grounding and bonding braids can be installed in extremely corrosive environments, like offshore applications or coastal applications. The full range of CPI braids are ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation, oil and chemical industry.

Material: Stainless Steel 316L (EN 1.4404) Certification Details: UL® 467

- Superior abrasion, corrosion, chemical and UV resistance make CPI braids ideal for outdoor applications
- Great for expansion joints where constant movement requires a flexible and durable solution
- · Ready to use out of the box, eliminates the need for cutting, stripping, crimping and punching
- Quick and easy to install
- Resistant to vibration and fatigue, reducing maintenance
- Will not rust or discolor, so the appearance will never fade or change
- Excellent electrical contact
- · No additional lugs or terminals needed
- Non-magnetic material
- · Recommended by the EMC/EMI directives
- GOST compliant
- · RoHS compliant






| Complies With: | | | | | | | | | |
|----------------|-------------------|------------------|---------|-----------|--------|--------|--------|--------|-------------|
| Part Number | Article Number | Cross Section | Length | Hole Size | A | В | С | D | Unit Weight |
| CPI16-150-8 | 554277 | 31.57 kcmil | 5.906" | 0.335" | 0.689" | 0.787" | 0.394" | 0.118" | 0.068 lb |
| CPI16-200-8 | 554278 | 31.57 kcmil | 7.874" | 0.335" | 0.689" | 0.787" | 0.394" | 0.118" | 0.082 lb |
| CPI16-250-8 | 554279 | 31.57 kcmil | 9.843" | 0.335" | 0.689" | 0.787" | 0.394" | 0.118" | 0.095 lb |
| CPI16-300-8 | 554280 | 31.57 kcmil | 11.811" | 0.335" | 0.689" | 0.787" | 0.394" | 0.118" | 0.110 lb |
| CPI16-400-8 | 554282 | 31.57 kcmil | 15.748" | 0.335" | 0.689" | 0.787" | 0.394" | 0.118" | 0.137 lb |
| CPI16-600-8 | 554286 | 31.57 kcmil | 23.622" | 0.335" | 0.689" | 0.787" | 0.394" | 0.118" | 0.192 lb |
| CPI25-150-10 | 554299 | 49.34 kcmil | 5.906" | 0.413" | 1.043" | 1.181" | 0.591" | 0.138" | 0.128 lb |
| CPI25-200-10 | 554300 | 49.34 kcmil | 7.874" | 0.413" | 1.043" | 1.181" | 0.591" | 0.138" | 0.150 lb |
| CPI25-250-10 | 554301 | 49.34 kcmil | 9.843" | 0.413" | 1.043" | 1.181" | 0.591" | 0.138" | 0.172 lb |
| CPI25-300-10 | 554302 | 49.34 kcmil | 11.811" | 0.413" | 1.043" | 1.181" | 0.591" | 0.138" | 0.194 lb |
| CPI25-400-10 | 554304 | 49.34 kcmil | 15.748" | 0.413" | 1.043" | 1.181" | 0.591" | 0.138" | 0.238 lb |
| CPI25-600-10 | 554308 | 49.34 kcmil | 23.622" | 0.413" | 1.043" | 1.181" | 0.591" | 0.138" | 0.324 lb |
| CPI35-150-12 | 554321 | 69.07 kcmil | 5.906" | 0.512" | 1.043" | 1.181" | 0.591" | 0.157" | 0.157 lb |
| CPI35-200-12 | 554322 | 69.07 kcmil | 7.874" | 0.512" | 1.043" | 1.181" | 0.591" | 0.157" | 0.187 lb |
| CPI35-250-12 | 554323 | 69.07 kcmil | 9.843" | 0.512" | 1.043" | 1.181" | 0.591" | 0.157" | 0.218 lb |
| CPI35-300-12 | 554324 | 69.07 kcmil | 11.811" | 0.512" | 1.043" | 1.181" | 0.591" | 0.157" | 0.247 lb |
| CPI35-400-12 | 554326 | 69.07 kcmil | 15.748" | 0.512" | 1.043" | 1.181" | 0.591" | 0.157" | 0.309 lb |
| CPI35-600-12 | 554330 | 69.07 kcmil | 23.622" | 0.512" | 1.043" | 1.181" | 0.591" | 0.157" | 0.430 lb |
| CPI50-150-12 | 554343 | 98.68 kcmil | 5.906" | 0.512" | 1.181" | 1.181" | 0.591" | 0.197" | 0.245 lb |
| CPI50-200-12 | 554344 | 98.68 kcmil | 7.874" | 0.512" | 1.181" | 1.181" | 0.591" | 0.197" | 0.287 lb |
| CPI50-250-12 | 554345 | 98.68 kcmil | 9.843" | 0.512" | 1.181" | 1.181" | 0.591" | 0.197" | 0.331 lb |
| CPI50-300-12 | 554346 | 98.68 kcmil | 11.811" | 0.512" | 1.181" | 1.181" | 0.591" | 0.197" | 0.375 lb |
| CPI50-400-12 | 554348 | 98.68 kcmil | 15.748" | 0.512" | 1.181" | 1.181" | 0.591" | 0.197" | 0.461 lb |
| CPI50-600-12 | 554352 | 98.68 kcmil | 23.622" | 0.512" | 1.181" | 1.181" | 0.591" | 0.197" | 0.635 lb |
| CPI70-1100-12 | 554384 | 138.15 kcmil | 43.307" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 1.464 lb |
| CPI70-150-12 | 554365 | 138.15 kcmil | 5.906" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 0.306 lb |

| Part Number | Article Number | Cross Section | Length | Hole Size | A | В | С | D | Unit Weight |
|----------------|-------------------|------------------|---------|-----------|--------|--------|--------|--------|-------------|
| CPI70-200-12 | 554366 | 138.15 kcmil | 7.874" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 0.368 lb |
| CPI70-250-12 | 554367 | 138.15 kcmil | 9.843" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 0.428 lb |
| CPI70-300-12 | 554368 | 138.15 kcmil | 11.811" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 0.489 lb |
| CPI70-400-12 | 554370 | 138.15 kcmil | 15.748" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 0.611 lb |
| CPI70-600-12 | 554374 | 138.15 kcmil | 23.622" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 0.855 lb |
| CPI70-800-12 | 554378 | 138.15 kcmil | 31.496" | 0.512" | 1.181" | 1.181" | 0.591" | 0.228" | 1.098 lb |

MBJ GROUNDING AND BONDING BRAID, TINNED COPPER





MBJ Grounding and Bonding Braids are a reliable and convenient grounding solution for applications that require flexibility and durability. The tinned copper ground braids with massivated palms come ready to install without any additional cutting, stripping, crimping or punching and do not require the addition of tin or crimped lugs. The proprietary manufacturing process optimizes the electrical contact between each wire and helps eliminate moisture issues in the palms, preventing corrosion and lengthening the useful life of the braid.

Material: Copper Finish: Tinned

Working Temperature: 221 °F Max

Complies With:

- Complete range of earth/ground flexible connections from 6 - 100 mm² (11.84 - 197.35 kcmil) cross section and from 100 - 500 mm (3.937" - 19.685") length
- Integral palm, without tin or crimped lugs for superior electrical contact and tensile strength resistance
- Resistant to vibration and fatigue, reducing maintenance
- Provides weight savings, material savings and lower impedance when compared to similar lugged cables with insulation
- · Ready to use out of the box, eliminates the need for cutting, stripping, crimping and punching
- Quick and easy to install
- Recommended by the EMC/EMI directives and less impedance than cables
- GOST compliant
- · RoHS compliant






| complies With: | | | | | | | | | |
|----------------|-------------------|-----------|-----------|---------------|---------|-----------|--------|--------|-------------|
| Part Number | Article Number | Intensity | Thickness | Cross Section | Length | Hole Size | A | В | Unit Weight |
| MBJ100-250-16 | 563500 | 349 A | 0.157" | 197.35 kcmil | 9.843" | 0.650" | 1.969" | 2.165" | 0.559 lb |
| MBJ100-250-30 | 563510 | 349 A | 0.157" | 197.35 kcmil | 9.843" | 1.201" | 1.969" | 2.165" | 0.559 lb |
| MBJ100-500-16 | 563520 | 349 A | 0.157" | 197.35 kcmil | 19.685" | 0.650" | 1.969" | 2.165" | 1.118 lb |
| MBJ100-500-30 | 563530 | 349 A | 0.157" | 197.35 kcmil | 19.685" | 1.201" | 1.969" | 2.165" | 1.118 lb |
| MBJ10-200-6 | 556930 | 75 A | 0.043" | 19.74 kcmil | 7.874" | 0.256" | 0.433" | 0.709" | 0.048 lb |
| MBJ10-300-6 | 556610 | 75 A | 0.043" | 19.74 kcmil | 11.811" | 0.256" | 0.433" | 0.709" | 0.073 lb |
| MBJ16-100-6 | 563540 | 120 A | 0.059" | 31.57 kcmil | 3.937" | 0.256" | 0.591" | 0.787" | 0.040 lb |
| MBJ16-100-8 | 556620 | 120 A | 0.059" | 31.57 kcmil | 3.937" | 0.335" | 0.591" | 0.787" | 0.040 lb |
| MBJ16-150-6 | 563550 | 120 A | 0.059" | 31.57 kcmil | 5.906" | 0.256" | 0.591" | 0.787" | 0.077 lb |
| MBJ16-150-8 | 556630 | 120 A | 0.059" | 31.57 kcmil | 5.906" | 0.335" | 0.591" | 0.787" | 0.077 lb |
| MBJ16-200-6 | 563300 | 120 A | 0.059" | 31.57 kcmil | 7.874" | 0.256" | 0.591" | 0.787" | 0.073 lb |
| MBJ16-200-8 | 556640 | 120 A | 0.059" | 31.57 kcmil | 7.874" | 0.335" | 0.591" | 0.787" | 0.073 lb |
| MBJ16-250-8 | 556650 | 120 A | 0.059" | 31.57 kcmil | 9.843" | 0.335" | 0.591" | 0.787" | 0.088 lb |
| MBJ16-300-6 | 563320 | 120 A | 0.059" | 31.57 kcmil | 11.811" | 0.256" | 0.591" | 0.787" | 0.110 lb |
| MBJ16-300-8 | 556660 | 120 A | 0.059" | 31.57 kcmil | 11.811" | 0.335" | 0.591" | 0.787" | 0.110 lb |
| MBJ16-500-8 | 556940 | 120 A | 0.059" | 31.57 kcmil | 19.685" | 0.335" | 0.591" | 0.787" | 0.180 lb |
| MBJ25-100-10 | 556670 | 150 A | 0.059" | 49.34 kcmil | 3.937" | 0.413" | 0.866" | 1.102" | 0.059 lb |
| MBJ25-150-10 | 556680 | 150 A | 0.059" | 49.34 kcmil | 5.906" | 0.413" | 0.866" | 1.102" | 0.086 lb |
| MBJ25-200-10 | 556690 | 150 A | 0.059" | 49.34 kcmil | 7.874" | 0.413" | 0.866" | 1.102" | 0.114 lb |
| MBJ25-200-12 | 563430 | 150 A | 0.059" | 49.34 kcmil | 7.874" | 0.492" | 0.866" | 1.102" | 0.114 lb |
| MBJ25-200-6 | 563340 | 150 A | 0.059" | 49.34 kcmil | 7.874" | 0.256" | 0.866" | 1.102" | 0.114 lb |
| MBJ25-250-10 | 556700 | 150 A | 0.059" | 49.34 kcmil | 9.843" | 0.413" | 0.866" | 1.102" | 0.141 lb |
| MBJ25-300-10 | 556710 | 150 A | 0.059" | 49.34 kcmil | 11.811" | 0.413" | 0.866" | 1.102" | 0.169 lb |
| MBJ25-500-10 | 556950 | 150 A | 0.059" | 49.34 kcmil | 19.685" | 0.413" | 0.866" | 1.102" | 0.286 lb |

| Part Number | Article Number | Intensity | Thickness | Cross Section | Length | Hole Size | A | В | Unit Weight |
|----------------|-------------------|-----------|-----------|---------------|---------|-----------|--------|--------|-------------|
| MBJ30-100-10 | 556720 | 180 A | 0.079" | 59.20 kcmil | 3.937" | 0.413" | 0.866" | 1.102" | 0.070 lb |
| MBJ30-150-10 | 556730 | 180 A | 0.079" | 59.20 kcmil | 5.906" | 0.413" | 0.866" | 1.102" | 0.103 lb |
| MBJ30-200-10 | 556740 | 180 A | 0.079" | 59.20 kcmil | 7.874" | 0.413" | 0.866" | 1.102" | 0.136 lb |
| MBJ30-250-10 | 556750 | 180 A | 0.079" | 59.20 kcmil | 9.843" | 0.413" | 0.866" | 1.102" | 0.165 lb |
| MBJ30-300-10 | 556760 | 180 A | 0.079" | 59.20 kcmil | 11.811" | 0.413" | 0.866" | 1.102" | 0.202 lb |
| MBJ30-500-10 | 556960 | 180 A | 0.079" | 59.20 kcmil | 19.685" | 0.413" | 0.866" | 1.102" | 0.341 lb |
| MBJ35-100-10 | 556770 | 197 A | 0.083" | 69.07 kcmil | 3.937" | 0.413" | 0.866" | 1.102" | 0.081 lb |
| MBJ35-150-10 | 556780 | 197 A | 0.083" | 69.07 kcmil | 5.906" | 0.413" | 0.866" | 1.102" | 0.119 lb |
| MBJ35-200-10 | 556790 | 197 A | 0.083" | 69.07 kcmil | 7.874" | 0.413" | 0.866" | 1.102" | 0.158 lb |
| MBJ35-250-10 | 556800 | 197 A | 0.083" | 69.07 kcmil | 9.843" | 0.413" | 0.866" | 1.102" | 0.196 lb |
| MBJ35-250-25 | 565000 | 197 A | 0.059" | 69.07 kcmil | 9.843" | 1.004" | 1.575" | 1.772" | 0.196 lb |
| MBJ35-300-10 | 556810 | 197 A | 0.083" | 69.07 kcmil | 11.811" | 0.413" | 0.866" | 1.102" | 0.242 lb |
| MBJ35-500-10 | 556970 | 197 A | 0.083" | 69.07 kcmil | 19.685" | 0.413" | 0.866" | 1.102" | 0.396 lb |
| MBJ50-100-10 | 556820 | 250 A | 0.098" | 98.68 kcmil | 3.937" | 0.413" | 1.102" | 1.300" | 0.114 lb |
| MBJ50-150-10 | 556830 | 250 A | 0.098" | 98.68 kcmil | 5.906" | 0.413" | 1.102" | 1.300" | 0.169 lb |
| MBJ50-200-10 | 556840 | 250 A | 0.098" | 98.68 kcmil | 7.874" | 0.413" | 1.102" | 1.300" | 0.264 lb |
| MBJ50-200-12 | 563440 | 250 A | 0.098" | 98.68 kcmil | 7.874" | 0.492" | 1.102" | 1.300" | 0.264 lb |
| MBJ50-200-16 | 563360 | 250 A | 0.098" | 98.68 kcmil | 7.874" | 0.650" | 1.102" | 1.300" | 0.242 lb |
| MBJ50-200-18 | 563370 | 250 A | 0.098" | 98.68 kcmil | 7.874" | 0.728" | 1.102" | 1.300" | 0.242 lb |
| MBJ50-200-6 | 563350 | 250 A | 0.098" | 98.68 kcmil | 7.874" | 0.256" | 1.102" | 1.300" | 0.264 lb |
| MBJ50-250-10 | 556850 | 250 A | 0.098" | 98.68 kcmil | 9.843" | 0.413" | 1.102" | 1.300" | 0.279 lb |
| MBJ50-300-10 | 556860 | 250 A | 0.098" | 98.68 kcmil | 11.811" | 0.413" | 1.102" | 1.300" | 0.337 lb |
| MBJ50-300-16 | 563390 | 250 A | 0.098" | 98.68 kcmil | 11.811" | 0.650" | 1.102" | 1.300" | 0.330 lb |
| MBJ50-300-18 | 563400 | 250 A | 0.098" | 98.68 kcmil | 11.811" | 0.728" | 1.102" | 1.300" | 0.308 lb |
| MBJ50-300-6 | 563380 | 250 A | 0.098" | 98.68 kcmil | 11.811" | 0.256" | 1.102" | 1.300" | 0.330 lb |
| MBJ50-500-10 | 556980 | 250 A | 0.098" | 98.68 kcmil | 19.685" | 0.413" | 1.102" | 1.300" | 0.561 lb |
| MBJ50-500-12 | 563560 | 250 A | 0.098" | 98.68 kcmil | 19.685" | 0.492" | 1.102" | 1.300" | 0.561 lb |
| MBJ6-150-6 | 556600 | 40 A | 0.043" | 11.84 kcmil | 5.906" | 0.256" | 0.433" | 0.709" | 0.022 lb |
| MBJ6-200-6 | 563410 | 40 A | 0.043" | 11.84 kcmil | 7.874" | 0.256" | 0.433" | 0.709" | 0.037 lb |
| MBJ70-300-10 | 563460 | 290 A | 0.133" | 138.15 kcmil | 11.811" | 0.413" | 1.102" | 1.300" | 0.462 lb |
| MBJ70-300-12 | 563420 | 290 A | 0.133" | 138.15 kcmil | 11.811" | 0.492" | 1.102" | 1.300" | 0.462 lb |
| MBJ70-300-16 | 563470 | 290 A | 0.133" | 138.15 kcmil | 11.811" | 0.650" | 1.102" | 1.300" | 0.440 lb |
| MBJ70-300-22 | 563480 | 290 A | 0.110" | 138.15 kcmil | 11.811" | 0.886" | 1.575" | 1.772" | 0.440 lb |
| MBJ70-300-6 | 563450 | 290 A | 0.133" | 138.15 kcmil | 11.811" | 0.256" | 1.102" | 1.300" | 0.462 lb |
| MBJ70-500-10 | 563490 | 290 A | 0.133" | 138.15 kcmil | 19.685" | 0.413" | 1.102" | 1.300" | 0.748 lb |

TAPE CONDUCTOR





- Lower impedance than equivalent sized round conductor
- Used for lightning protection system downconductor or grounding applications

Material: Copper Finish: Bare


| Part Number | Length | Width | Thickness | Unit Weight |
|---------------|--------|-------|-----------|-------------|
| A811A26F50 | 50' | 2" | 26 GA | 0.152 lb |
| A811A26F500 | 500' | 2" | 26 GA | 0.152 lb |
| A811A26W4F500 | 500' | 4" | 26 GA | 0.231 lb |
| A811C20F100 | 100' | 3" | 20 GA | 0.410 lb |

| Part Number | Length | Width | Thickness | Unit Weight |
|-------------|--------|-------|-----------|-------------|
| A811C20F20 | 20' | 3" | 20 GA | 0.410 lb |
| LPC172CTO | | 3/4" | 8 GA | 0.110 lb |

Cut-to-order (CTO) lengths are available for an additional charge. Unit weight is per meter (3.28').

LOW IMPEDANCE RISER





FEATURED HIGHLIGHTS

- Used to connect the signal reference grid to equipment
- Welded to the SRG using Cadweld mold type TW
- Has a lower impedance than a 4/0 AWG copper conductor


Material: Copper

| Part Number | Length | Width | Thickness | Hole Size | |
|----------------|--------|-------|-----------|-----------|--|
| B802D01A12 | 12" | 2" | 26 GA | 5/16" | |
| B802D01A120 | 120" | 2" | 26 GA | 5/16" | |
| B802D01A24 | 24" | 2" | 26 GA | 5/16" | |
| B802D01A36 | 36" | 2" | 26 GA | 5/16" | |
| B802D01A48 | 48" | 2" | 26 GA | 5/16" | |
| B802D01A5 | 5" | 2" | 26 GA | 5/16" | |
| | | | | | |

Grounding & Bonding

COPPER-BONDED GROUND ROD, POINTED





FEATURED HIGHLIGHTS

- 99.9% pure electrolytic copper coating
- Molecular bond to nickel-sealed high strength steel core
- Rods have a high carbon steel core and tip that provide superior strength when driving
- · Copper coating will not crack when bent or tear when driven
- Minimum copper coating of 10 mils on rods listed to UL® 467
- nVent ERICO name, length, diameter and part number is roll-stamped within 12" (304,8 mm) of chamfered end
- UL logo and control number where applicable stamped on each rod for easy inspection after installation

Material: Copper-Bonded Steel Tensile Strength: 80 000 psi Min






| Tensile Strengt | th: 80,000 psi Min | | | | | | | |
|-----------------|---------------------------------|--------------------------------|--------|----------------------|----------------|-----------|-------------------------------------|----------------|
| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Length | Plating Thickness | Unit Weight | UPC Label | Complies With | Certifications |
| 611300 | 1/2" | 0.504" | 10.0' | 10 mil | 6.9 lb | No | ANSI®/NEMA® GR1 | CSA, cULus |
| 611300UPC | 1/2" | 0.504" | 10.0' | 10 mil | 6.9 lb | Yes | ANSI®/NEMA® GR1 | cULus |
| 611303 | 1/2" | 0.505" | 10.0' | 13 mil | 7.4 lb | No | ANSI®/NEMA® GR1 | cULus |
| 611330 | 1/2" | 0.504" | 3.0' | 10 mil | 2.2 lb | No | | |
| 611340 | 1/2" | 0.504" | 4.0' | 10 mil | 2.8 lb | No | | |
| 611350 | 1/2" | 0.504" | 5.0' | 10 mil | 3.5 lb | No | | |
| 611353 | 1/2" | 0.505" | 5.0' | 13 mil | 3.7 lb | No | | |
| 511360 | 1/2" | 0.504" | 6.0' | 10 mil | 4.4 lb | No | | |
| 511360UPC | 1/2" | 0.504" | 6.0' | 10 mil | 4.4 lb | Yes | | |
| 511380 | 1/2" | 0.504" | 8.0' | 10 mil | 5.5 lb | No | ANSI®/NEMA® GR1 | UL |
| 511380UPC | 1/2" | 0.504" | 8.0' | 10 mil | 5.5 lb | Yes | ANSI®/NEMA® GR1 | UL |
| 613400 | 3/4" | 0.681" | 10.0' | 10 mil | 12.6 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | CSA, cULus |
| 613400UPC | 3/4" | 0.681" | 10.0' | 10 mil | 12.6 lb | Yes | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 513403 | 3/4" | 0.681" | 10.0′ | 13 mil | 12.4 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 513412 | 3/4" | 0.681" | 12.0′ | 10 mil | 14.9 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 513415 | 3/4" | 0.681" | 15.0' | 10 mil | 18.5 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 613440 | 3/4" | 0.681" | 4.0' | 10 mil | 5.6 lb | No | IEC® EN 62561-2 | |
| 513450 | 3/4" | 0.681" | 5.0' | 10 mil | 6.2 lb | No | IEC® EN 62561-2 | |
| 513460 | 3/4" | 0.681" | 6.0' | 10 mil | 7.5 lb | No | IEC® EN 62561-2 | |
| 513480 | 3/4" | 0.681" | 8.0' | 10 mil | 10.1 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | UL |
| 613483 | 3/4" | 0.681" | 8.0' | 13 mil | 10.0 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 513840 | 3/8" | 0.358" | 4.0' | 10 mil | 1.3 lb | No | | |
| 513840UPC | 3/8" | 0.358" | 4.0' | 10 mil | 1.3 lb | Yes | | |
| 513850 | 3/8" | 0.358" | 5.0' | 10 mil | 1.6 lb | No | | |
| 513860 | 3/8" | 0.358" | 6.0' | 10 mil | 2.0 lb | No | | |
| 513880 | 3/8" | 0.358" | 8.0' | 10 mil | 2.7 lb | No | | |
| 514400 | 1" | 0.914" | 10.0' | 10 mil | 22.0 lb | No | ANSI®/NEMA® GR1 | CSA, cULus |
| 615800 | 5/8" | 0.560" | 10.0' | 10 mil | 8.5 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | CSA, cULus |
| 615800UPC | 5/8" | 0.560" | 10.0' | 10 mil | 8.4 lb | Yes | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 615803 | 5/8" | 0.561" | 10.0' | 13 mil | 8.4 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 615812 | 5/8" | 0.560" | 12.0' | 10 mil | 10.0 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| 615815 | 5/8" | 0.560" | 15.0' | 10 mil | 12.8 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | cULus |
| | | | | | | | | |

| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Length | Plating Thickness | Unit Weight | UPC Label | Complies With | Certifications |
|----------------|---------------------------------|--------------------------------|--------|----------------------|----------------|-----------|-------------------------------------|----------------|
| 615823 | 5/8" | 0.560" | 1.9' | 10 mil | 1.8 lb | No | IEC® EN 62561-2 | |
| 615830 | 5/8" | 0.560" | 3.0' | 10 mil | 2.5 lb | No | IEC® EN 62561-2 | |
| 615840 | 5/8" | 0.560" | 4.0' | 10 mil | 3.4 lb | No | IEC® EN 62561-2 | |
| 615840UPC | 5/8" | 0.560" | 4.0' | 10 mil | 3.4 lb | Yes | IEC® EN 62561-2 | |
| 615843 | 5/8" | 0.561" | 4.0' | 13 mil | 3.4 lb | No | IEC® EN 62561-2 | |
| 615850 | 5/8" | 0.560" | 5.0' | 10 mil | 4.2 lb | No | IEC® EN 62561-2 | |
| 615853 | 5/8" | 0.561" | 5.0' | 13 mil | 4.5 lb | No | IEC® EN 62561-2 | |
| 615860 | 5/8" | 0.560" | 6.0' | 10 mil | 5.1 lb | No | IEC® EN 62561-2 | |
| 615860UPC | 5/8" | 0.560" | 6.0' | 10 mil | 5.1 lb | Yes | IEC® EN 62561-2 | |
| 615863 | 5/8" | 0.561" | 6.0' | 13 mil | 5.4 lb | No | IEC® EN 62561-2 | |
| 615880 | 5/8" | 0.560" | 8.0' | 10 mil | 6.8 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | UL |
| 615880UPC | 5/8" | 0.560" | 8.0' | 10 mil | 6.8 lb | Yes | IEC® EN 62561-2, ANSI®/NEMA® GR1 | UL |
| 615883 | 5/8" | 0.561" | 8.0' | 13 mil | 6.8 lb | No | IEC® EN 62561-2, ANSI®/NEMA® GR1 | UL |
| 615883UPC | 5/8" | 0.561" | 8.0' | 13 mil | 6.8 lb | Yes | IEC® EN 62561-2, ANSI®/NEMA® GR1 | UL |

For rods to be listed to UL® 467, they must be at least 8' (2.43 m) in length.IEC® EN 62561-2 supercedes EN 50164-2.Additional lengths available.

COPPER-BONDED GROUND ROD, SECTIONAL





- Cold-rolled threads with continuous, unbroken grain flows preserve copper coating and are stronger than cut threads
- 99.9% pure electrolytic copper coating
- Molecular bond to nickel-sealed high strength steel core
- Rods have a high carbon steel core and tip that provide superior strength when driving
- Copper coating will not crack when bent or tear when driven
- Minimum copper coating of 10 mils on rods listed to UL® 467
- nVent ERICO name, length, diameter and part number is roll-stamped within 12" (304,8 mm) of chamfered end
- UL logo and control number where applicable stamped on each rod for easy inspection after installation





| Material: Copper-Bonded Steel |
|----------------------------------|
| Tensile Strength: 80,000 psi Min |

| remone or | 1611gti1: 00,000 p31 W | 1111 | | | | | | |
|----------------|---------------------------------|--------------------------------|-------------|--------|----------------------|----------------|--|----------------|
| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Thread Size | Length | Plating Thickness | Unit Weight | Complies With | Certifications |
| Thread Lo | ocation: Chamfered (N | Ion-Pointed) End On | ly | | | | | |
| 625850 | 5/8" | 0.560" | 5/8 UNC | 5' | 10 mil | 4.2 lb | IEC® EN 62561-2 | |
| Thread Lo | ocation: Pointed and C | hamfered Ends | | | | | | |
| 631300 | 1/2" | 0.504" | 9/16 UNC | 10' | 10 mil | 6.9 lb | ANSI®/NEMA® GR1 | CSA, cULus |
| 631303 | 1/2" | 0.505" | 9/16 UNC | 10' | 13 mil | 7.0 lb | ANSI®/NEMA® GR1 | cULus |
| 631340 | 1/2" | 0.504" | 9/16 UNC | 4' | 10 mil | 2.7 lb | | |
| 631350 | 1/2" | 0.504" | 9/16 UNC | 5' | 10 mil | 3.5 lb | | |
| 631360 | 1/2" | 0.504" | 9/16 UNC | 6' | 10 mil | 4.2 lb | | |
| 631380 | 1/2" | 0.504" | 9/16 UNC | 8' | 10 mil | 5.4 lb | ANSI®/NEMA® GR1 | UL |
| 633400 | 3/4" | 0.680" | 3/4 UNC | 10' | 10 mil | 12.5 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | CSA, cULus |
| 633403 | 3/4" | 0.681" | 3/4 UNC | 10' | 13 mil | 12.5 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | cULus |
| 633415 | 3/4" | 0.680" | 3/4 UNC | 15' | 10 mil | 18.8 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | cULus |
| | | | | | | | | |

| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Thread Size | Length | Plating Thickness | Unit Weight | Complies With | Certifications |
|----------------|---------------------------------|--------------------------------|-------------|--------|----------------------|----------------|--|----------------|
| 633430 | 3/4" | 0.680" | 3/4 UNC | 3' | 10 mil | 3.8 lb | IEC® EN 62561-2 | |
| 633440 | 3/4" | 0.680" | 3/4 UNC | 4' | 10 mil | 4.9 lb | IEC® EN 62561-2 | |
| 633450 | 3/4" | 0.680" | 3/4 UNC | 5' | 10 mil | 6.2 lb | IEC® EN 62561-2 | |
| 633460 | 3/4" | 0.680" | 3/4 UNC | 6' | 10 mil | 7.1 lb | IEC® EN 62561-2 | |
| 633463 | 3/4" | 0.681" | 3/4 UNC | 6' | 13 mil | 7.1 lb | IEC® EN 62561-2 | |
| 633470 | 3/4" | 0.680" | 3/4 UNC | 7' | 10 mil | 8.5 lb | IEC® EN 62561-2 | |
| 633480 | 3/4" | 0.680" | 3/4 UNC | 8' | 10 mil | 9.6 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | UL |
| 634400 | 1" | 1.000" | 1 UNC | 10' | 10 mil | 22.1 lb | ANSI®/NEMA® GR1 | CSA, cULus |
| 635800 | 5/8" | 0.560" | 5/8 UNC | 10' | 10 mil | 8.4 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | CSA, cULus |
| 635803 | 5/8" | 0.561" | 5/8 UNC | 10' | 13 mil | 8.5 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | cULus |
| 635830 | 5/8" | 0.560" | 5/8 UNC | 3' | 10 mil | 2.6 lb | IEC® EN 62561-2 | |
| 635840 | 5/8" | 0.560" | 5/8 UNC | 4' | 10 mil | 3.4 lb | IEC® EN 62561-2 | |
| 635843 | 5/8" | 0.561" | 5/8 UNC | 4' | 13 mil | 3.4 lb | IEC® EN 62561-2 | |
| 635850 | 5/8" | 0.560" | 5/8 UNC | 5' | 10 mil | 4.2 lb | IEC® EN 62561-2 | |
| 635860 | 5/8" | 0.560" | 5/8 UNC | 6' | 10 mil | 5.0 lb | IEC® EN 62561-2 | |
| 635870 | 5/8" | 0.560" | 5/8 UNC | 7' | 10 mil | 6.4 lb | IEC® EN 62561-2 | |
| 635880 | 5/8" | 0.560" | 5/8 UNC | 8' | 10 mil | 6.7 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | UL |
| 635883 | 5/8" | 0.561" | 5/8 UNC | 8' | 13 mil | 6.7 lb | ANSI [®] /NEMA [®] GR1, IEC [®] EN 62561-2 | UL |
| | | | | | | | | |

For rods to be listed to UL® 467, they must be at least 8' (2.43 m) in length.IEC® EN 62561-2 supercedes EN 50164-2.

CONVENIENT GROUND ELECTRODE KIT



- Kit includes two ground rods, ground clamp, compression coupler and drive sleeve
- UL®-Listed and NEC®-Compliant
- · Allows for installation from ground level
- Two 4' (1.2 m) ground rods with coupler provide more convenient storage and transportation than one 8' (2.4 m) ground rod



| Part Number Material: (| Ground Rods Copper-Bonded Stee | Clamp Bronze | Hammerlock | Drive Sleeve | Conductor Size | | | | |
|---------------------------------------|-----------------------------------|-------------------|------------|--------------|---|--|--|--|--|
| CGE5CP | 615840 | CP58 | | EDS58 | #8 Solid - #2 Stranded, 10 mm² Solid - 35 mm² Stranded | | | | |
| Material: Copper-Bonded Steel, Copper | | | | | | | | | |
| CGE51K | 615840 | | EHL58C1K | EDS58 | #4 Solid - #6 Solid, 10 mm² Stranded - 16 mm² Stranded | | | | |



FEATURED HIGHLIGHTS

- Segmented portable ground rod kit specified by the United States military
- Each of the three ground rod sections is 3' (0.91 m) long, thus creating a total depth of 9' (2.74 m) of earth grounding
- All accessories are provided in the kit to assemble the portable ground
- 6' (1.83 m) of copper grounding cable connected to the rod, makes for an easy connection to a vehicle or other item requiring a ground

Part Number

635837

Kit Includes: 3 sectional copper-bonded ground rods - 5/8" x 3" (190.5 mm x 0.91 m), 3 threaded couplers, 1 drive stud, 1 heavy duty ground rod clamp, Tang and collar lugs, and 6' (1.83 m) of #6 copper wire.

STAINLESS STEEL GROUND ROD, POINTED



FEATURED HIGHLIGHTS

· For use in highly-corrosive soils

Material: Stainless Steel 302 (EN 1.4324), Stainless Steel 304 (EN 1.4301) Tensile Strength: 85,000 psi Min



| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Length | Unit Weight | UPC Label | Certifications |
|----------------|---------------------------------|--------------------------------|--------|-------------|-----------|----------------|
| 681300 | 1/2" | 0.500" | 10' | 6.6 lb | No | |
| 683400 | 3/4" | 0.750" | 10' | 15.0 lb | No | cULus |
| 683412 | 3/4" | 0.750" | 12' | 19.0 lb | No | |
| 683450 | 3/4" | 0.750" | 5' | 6.9 lb | No | |
| 683480 | 3/4" | 0.750" | 8' | 10.1 lb | No | UL |
| 684400 | 1" | 1.000" | 10' | 26.8 lb | No | |
| 684415 | 1" | 1.000" | 15' | 30.0 lb | No | |
| 685800 | 5/8" | 0.625" | 10' | 10.4 lb | No | cULus |
| 685880 | 5/8" | 0.625" | 8' | 8.3 lb | No | UL |
| 685880UPC | 5/8" | 0.625" | 8' | 8.3 lb | Yes | UL |

STAINLESS STEEL GROUND ROD, SECTIONAL



FEATURED HIGHLIGHTS

• Utilizes a cut thread for highly corrosive soil




Tensile Strength: 70,000 psi Min

| remaine ourering | tii: 70,000 poi iviiii | | | | | |
|---|---------------------------------|--------------------------------|-------------|--------|-------------|----------------|
| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Thread Size | Length | Unit Weight | Certifications |
| Material: Stair | nless Steel 302 (EN 1.4324), | Stainless Steel 304 (EN 1.43 | 801) | | | |
| 681300S | 1/2" | 0.500" | 1/2 UNC | 10' | 6.6 lb | |
| 683450S | 3/4" | 0.750" | 3/4 UNC | 5′ | 6.9 lb | |
| 684400S | 1" | 1.000" | 1 UNC | 10' | 26.8 lb | |
| 685800S | 5/8" | 0.625" | 5/8 UNC | 10' | 10.4 lb | cULus |
| 685880S | 5/8" | 0.625" | 5/8 UNC | 8' | 7.8 lb | UL |
| Material: Stainless Steel 316 (EN 1.4401) | | | | | | |
| 683400S316 | 3/4" | 0.750" | 3/4 UNC | 10' | 13.8 lb | cULus |
| | | | | | | |


CHEMICAL GROUND ELECTRODE



Chemical ground electrodes provide a low impedance ground in locations of high soil resistivity and dry soil conditions. Used in conjunction with a Bentonite backfill and nVent ERICO's unique GEM material, the nVent ERICO chemical ground rod electrode systems provide a method to improve soil resistivity directly surrounding the electrode, and can replace multiple conventional ground rods. It maintains a low ground resistance, maintenance-free installation that dissipates lightning energy and other dangerous electrical fault currents, even in sandy or rocky soil conditions.




Horizontal with Pigtail Up




Horizontal with Pigtail Down

FEATURED HIGHLIGHTS

- Contains natural electrolytic salts, which permeate into the surrounding soil to condition the soil and increase its conductivity
- Easy connection to ground electrode conductor using the factory provided pigtail (up or down orientation)
- Provides decades of reliable services due to rugged construction and high-quality metals with a 30-year minimum service life
- 2-1/8" (54 mm) outside diameter copper pipe with 0.083" (2.1 mm) wall
- Available in continuous sections up to 10' (3.05 m) in length; longer rods can be field assembled using 5' (1.52 m) or 10' (3.05 m) extensions
- Optional factory-attached radial strips are available to reduce impedance to high-frequency lightning energy and to control the direction of the dissipation
- L-shaped rods are available for horizontal installation applications where it is impractical to auger deep vertical holes
- Access segment on horizontal (L-shaped) chemical ground electrodes is 32" (813 mm) deep



Vertical with Pigtail Up



Vertical with Pigtail Down

| ECR-V-10-2Q-4-U-B | | |
|-------------------|--|---|
| ECR | nVent ERICO Chemical Ground Electrode System | |
| V | Installation | H: Horizontal HE: Horizontal Extended V: Vertical E: Vertical Extended |
| 10 | Electrode Length (') | |
| 2Q | Cable Size | 1G: #6 Sol, 1L: #4 Str, 1T: #2 Sol, 1V: #2 Str 2C: 1/0 Str, 2G: 2/0 Str, 2K: 3/0 Sol, 2L: 3/0 Str, 2Q: 4/0 Str 2V: 250 kcmil Str, 3D: 350 kcmil Str, 3Q: 500 kcmil Str, 4L: 750 kcmil Str |
| 4 | Pigtail Length (') | |
| U | Pigtail Orientation | U: Up, D: Down |
| B* | Rod assembly only | Add "B" for rod assembly only. Leave blank for kit. |

$_{\text{C}}\text{(UL)}_{\text{US}}$

Material: Copper

| Material: Copper | | | | | ه رقی ه |
|--------------------|------------------|----------------|-------|--------------------|---------|
| Global Part Number | Electrode Length | Pigtail Length | Depth | Conductor Size | Kit |
| ECRE152Q4U | 15' | 4.0' | | 4/0 Stranded | Yes |
| ECRE201T4U | 20' | 4.0' | | #2 Solid | Yes |
| ECRE202G4U | 20' | 4.0' | | 2/0 Stranded | Yes |
| ECRE202Q4U | 20' | 4.0' | | 4/0 Stranded | Yes |
| ECRE401T4D | 40' | 4.0' | | #2 Solid | Yes |
| ECRE402Q4U | 40' | 4.0' | | 4/0 Stranded | Yes |
| ECRH081T4D | 8' | 4.0' | 32" | #2 Solid | Yes |
| ECRH081T4U | 8' | 4.0' | 32" | #2 Solid | Yes |
| ECRH081T4UB | 8' | 4.0' | 32" | #2 Solid | No |
| ECRH082C4U | 8' | 4.0' | 32" | 1/0 Stranded | Yes |
| ECRH101T4D | 10' | 4.0' | 32" | #2 Solid | Yes |
| ECRH101T4U | 10' | 4.0' | 32" | #2 Solid | Yes |
| ECRH102G4U | 10' | 4.0' | 32" | 2/0 Stranded | Yes |
| ECRH102Q4D | 10' | 4.0' | 32" | 4/0 Stranded | Yes |
| ECRH102Q4U | 10' | 4.0' | 32" | 4/0 Stranded | Yes |
| ECRHE151G4U | 15' | 4.0' | 32" | #6 Solid | Yes |
| ECRHE152Q4U | 15' | 4.0' | 32" | 4/0 Stranded | Yes |
| ECRV082Q4D | 8' | 4.0' | | 4/0 Stranded | Yes |
| ECRV082Q4U | 8' | 4.0' | | 4/0 Stranded | Yes |
| ECRV101V4U | 10' | 4.0' | | #2 Stranded | Yes |
| ECRV102C4U | 10' | 4.0' | | 1/0 Stranded | Yes |
| ECRV102G4U | 10' | 4.0' | | 2/0 Stranded | Yes |
| ECRV102L4U | 10' | 4.0' | | 3/0 Stranded | Yes |
| ECRV102Q10U | 10' | 10.0' | | 4/0 Stranded | Yes |
| ECRV102Q4D | 10' | 4.0' | | 4/0 Stranded | Yes |
| ECRV102Q4U | 10' | 4.0' | | 4/0 Stranded | Yes |
| ECRV102Q4UB | 10' | 4.0' | | 4/0 Stranded | No |
| ECRV102V4U | 10' | 4.0' | | 250 kcmil Stranded | Yes |
| ECRV103Q4D | 10' | 4.0' | | 500 kcmil Stranded | Yes |
| ECRV121T4U | 12' | 4.0' | | #2 Solid | Yes |
| ECRV122V4D | 12' | 4.0' | | 250 kcmil Stranded | Yes |
| ECRV123Q4D | 12' | 4.0' | | 500 kcmil Stranded | Yes |
| | | | | | |

CHEMICAL GROUND ELECTRODE SALT MIX




FEATURED HIGHLIGHTS

• Individual packages of salt mix are available for sale separately from the chemical ground rod assembly

| ECRCHM15LB 15 lb | Part Number | Unit Weight | | |
|------------------|-------------|-------------|--|--|
| | | | | |

SOLID COPPER GROUND ROD, POINTED





FEATURED HIGHLIGHTS

• Solid copper ground rods made of high conductive hard drawn bare copper

Material: Copper


Tensile Strength: 42,000 psi Min



| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Length | Unit Weight | Certifications |
|----------------|---------------------------------|--------------------------------|--------|-------------|----------------|
| LPC700 | 1/2" | 0.500" | 8' | 6.1 lb | UL |
| LPC702 | 1/2" | 0.500" | 10' | 7.6 lb | cULus |
| LPC704 | 5/8" | 0.625" | 8' | 9.5 lb | UL |
| LPC706 | 5/8" | 0.625" | 10' | 11.8 lb | cULus |
| LPC711 | 3/4" | 0.750" | 10' | 17.0 lb | cULus |

Due to the inherent softness of the copper material, special consideration should be given when driving this product into the soil.

GALVANIZED GROUND ROD, POINTED

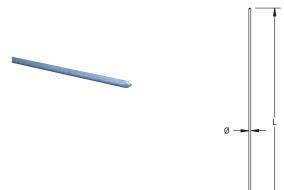

FEATURED HIGHLIGHTS

- Meets ANSI®/NEMA® GR1
- Zinc-coated exteriors are hot-dip galvanized for solid protection against corrosion, in accordance with ASTM® specification A153-78
- Surfaces are rigidly inspected to eliminate seams, slivers and other defects

Material: Steel

Finish: Hot-Dip Galvanized Tensile Strength: 80,000 psi Min



| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Length | Unit Weight | UPC Label | Certifications |
|----------------|---------------------------------|--------------------------------|--------|-------------|-----------|----------------|
| 811260UPC | 1/2" | 0.507" | 6' | 4.1 lb | Yes | |
| 811280UPC | 1/2" | 0.507" | 8' | 5.4 lb | Yes | |
| 811350 | 1/2" | 0.507" | 5' | 3.4 lb | No | |
| 811360 | 1/2" | 0.507" | 6' | 4.1 lb | No | |
| 811380 | 1/2" | 0.507" | 8' | 5.4 lb | No | |
| 813400 | 3/4" | 0.732" | 10' | 14.0 lb | No | CSA |
| 813400UPC | 3/4" | 0.732" | 10' | 14.3 lb | Yes | |
| 813480 | 3/4" | 0.732" | 8' | 11.2 lb | No | |
| 814400 | 1" | 1.011" | 10' | 27.2 lb | No | CSA |
| 815800 | 5/8" | 0.631" | 10' | 10.6 lb | No | CSA |
| 815800UPC | 5/8" | 0.631" | 10' | 10.6 lb | Yes | |
| 815840 | 5/8" | 0.631" | 4' | 4.2 lb | No | |
| 815850 | 5/8" | 0.631" | 5' | 5.3 lb | No | |
| 815860 | 5/8" | 0.631" | 6' | 6.4 lb | No | |
| 815860UPC | 5/8" | 0.631" | 6' | 6.4 lb | Yes | |
| 815880 | 5/8" | 0.631" | 8' | 8.5 lb | No | |
| 815880UPC | 5/8" | 0.631" | 8' | 8.4 lb | Yes | |

NVENT ERICO GROUND ENHANCEMENT MATERIAL (GEM)



nVent ERICO Ground Enhancement Material (GEM) is a superior conductive material that solves your toughest grounding problems. It is the ideal material to use in areas of poor conductivity, such as rocky ground, mountain tops and sandy soil. GEM dramatically reduces earth resistance and impedance measurements. Furthermore, GEM may reduce the size of the grounding system where conventional methods are unsatisfactory. Once installed, GEM is maintenance-free, not requiring periodic charging or the presence of water to maintain its conductivity.

To learn more about GEM, please see pages 18-20.

Unit Weight: 25 lb


FEATURED HIGHLIGHTS

- Maintains constant resistance for the life of the system once in its set form
- · Performs in all soil conditions even during dry spells
- · Does not require periodic charging treatments or placement
- Does not require the continuous presence of water to maintain its conductivity
- Fully sets within 3 days, fully cures within 28 days
- · Does not dissolve, decompose, or leach out with time
- Non-corrosive
- Reduces vandalism and theft since conductors are hard to remove from concrete
- Easy-to-handle 25 lb (11.3kg) bags or buckets
- · Requires only one person to install
- Exceeds IEC® 62561-7 which sets the benchmark for corrosion, leaching, sulfur content, and other environmental regulations
- Complies to the United States Environmental Protection Agency (EPA) Toxicity Characteristic Leaching Procedure (TCLP), EPA test method 1311
- Can be installed using trench or ground rod backfill methods

| Part Number | |
|----------------|---------------------------------|
| Number | Packaging |
| GEM25A | Bag with handles |
| GEM25ABKT | Plastic bucket with locking lid |

INSPECTION HOUSING, HIGH DENSITY POLYETHYLENE (HDPE)





FEATURED HIGHLIGHTS


- · Pedestrian load rating
- · Suitable for lighter load rating applications in turf
- · Chemical, UV and corrosion resistant
- 3/8" x 1 3/4" (44 mm) stainless steel lock bolt included
- Boxes and covers nest in 3 1/4" (83 mm) increments
- Two 3 1/2" x 1 1/2" (89 x 38 mm) knockouts per box
- T416BH includes four additional holes in the cover to allow water to enter the inspection well, typically for use with chemical ground rods

Material: High Density Polyethylene (HDPE) Color: Green Load Rating: 300 psf

| Part Number | Diameter, Grade Level | Outer Diameter | Height | Unit Weight | |
|----------------|-----------------------|----------------|--------|-------------|--|
| T416B | 10 1/4" | 13.1" | 10" | 4.5 lb | |
| T416BH | 10 1/4" | 13.1" | 10" | 4.5 lb | |

INSPECTION HOUSING WITH CONDUIT CUTOUT, HIGH DENSITY POLYETHYLENE (HDPE)





FEATURED HIGHLIGHTS

- · Suitable for lighter load rating applications in turf
- · Chemical, UV and corrosion resistant

Material: High Density Polyethylene (HDPE) Color: Black

Load Rating: 300 psf

| Part Number | Diameter, Grade Level | Outer Diameter | Height | Hole Size | Unit Weight | |
|----------------|-----------------------|----------------|---------|-----------|-------------|--|
| T416C | 14 1/4" | 24.38" | 18 1/4" | 2 3/4" | 16.2 lb | |

KEY FOR T416C INSPECTION HOUSING



FEATURED HIGHLIGHTS

- Replacement key for the T416C Inspection Housing
- Useful for maintenance crews or inspectors in the field

INSPECTION HOUSING, LIGHTWEIGHT POLYMER CONCRETE



FEATURED HIGHLIGHTS

- Tier 15 Design Load of 15,000 lbs (6,804 kg) with a test load of 22,500 lbs (10,206 kg)
- · Non-slip cover suitable for non-deliberate, incidental traffic
- Cuts with a standard hole saw, no concrete tools required


Material: Polymer Concrete

| Part Number | | | | |
|----------------|--------|--------|-------|-------------|
| Number | Height | Length | Width | Unit Weight |
| T416A | 18" | 25.1" | 16.2" | 75 lb |
| T416D | 12" | 15.4" | 15.4" | 31 lb |
| T416E | 18" | 15.4" | 15.4" | 35 lb |
| T416F | 23" | 15.4" | 15.4" | 47 lb |

Product specifications subject to change without notice.

INSPECTION HOUSING, HIGH-IMPACT POLYPROPYLENE





FEATURED HIGHLIGHTS


- Offers a high level of protection for critical grounding terminations through the use of its lockable lid
- Easy-locking lid only opened with security key
- Ease of ground termination maintenance due to large working aperture
- Lightweight design allows easy handling, storage and transportation
- Suitable for both paving and hot tar applications
- · UV-stabilized against degredation by sunlight
- · Non-brittle to prevent cold weather damage
- Base designed to accommodate Grounding Busbar for Inspection Housing (545135)

Material: High-Impact Polypropylene

| Part Number | Height | Length | Width | Unit Weight |
|----------------|--------|--------|-------|-------------|
| PIT03 | 8.5" | 9.5" | 8.2" | 2.8 lb |

INSPECTION HOUSING, CONCRETE





FEATURED HIGHLIGHTS

- · Concrete design for higher load rating
- · Available with a central lifting hook
- · Flush-fitting lid with plain surface minimizes slipping
- Suitable for most grounding and lightning protection installations
- Base designed to accept 545140 Grounding Busbar for Inspection Housings
- · Square shape

Material: Concrete Color: Gray

| Part Number | Height | Length | Width | Unit Weight |
|----------------|--------|--------|-------|-------------|
| IP900C | 6" | 13" | 13" | 57.2 lb |

INSPECTION HOUSING, SEAL KIT






FEATURED HIGHLIGHTS

- Prevents the ingress of ground water into and surrounding the inspection housing
- Waterproofing is achieved by enclosing an upper section of copper-bonded ground rod within a plastic pipe with seals located on both sides of the concrete pour
- The two plate-style flange serves to reduce pressure, which may occur from the capillary effect of water on the outside of the seal and inspection housing
- The flanges are intended to prevent water pressure from "popping" the inspection pit out of the concrete
- Delivered as a kit, including a 3.9 foot (1.2 meter) PVC pipe, to be adjusted to site conditions

Material: Thermoplastic

| Part Number | Length (L) | Width (W) | Depth (D) | A | Diameter | Water Pressure | Working Load (F) | Unit Weight |
|----------------|---------------|--------------|--------------|------|----------|----------------|---------------------|-------------|
| WGRS200 | 9.7" | 9.7" | 4.6' | 8.2" | 13.8" | 80 psi Max | 13,227 lb | 9.5 lb |

GROUNDING BUSBAR FOR INSPECTION HOUSING




FEATURED HIGHLIGHTS

• Grounding busbar for use in conjunction with ground rod inspection housings

Material: Copper

| Part Number | Length | Width | Thickness | A | Hole Size | Number of Holes | Inspection Housing | Unit Weight |
|----------------|--------|-------|-----------|-------|-----------|--------------------|-----------------------|-------------|
| 545135 | 7.87" | 0.98" | 0.02" | 0.98" | 0.41" | 8 | PIT03 | 0.49 lb |
| 545140 | 11.81" | 0.98" | 0.02" | 0.98" | 0.41" | 12 | IP-900-C | 0.73 lb |
| 545530 | 5.90" | 0.98" | 0.02" | 0.98" | 0.41" | 6 | 103470, 103480 | 0.37 lb |

GROUND MAT

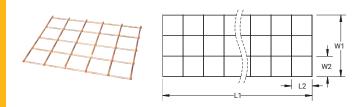

Prefabricated ground mats, made of wire mesh, are ideal for systems designed for safety purposes to protect operators against "touch potentials" at manually operated disconnect switches.

FEATURED HIGHLIGHTS

- Silver brazed joints (35% silver alloy brazing material) provide strength to resist separation during installation and bear the traffic of heavy vehicles
- Conductor spacing available in standard configurations
- Option to add center wire into the mat configuration is available
- Ground mats are laid flat onto pallets for shipping


Material: Copper. Copper-Bonded Steel

| Material: Copper, Copper-Bonded Steel | |
|---------------------------------------|---|
| Part Number | MAT |
| Length 1 (L1) | 96" Max |
| Width 1 (W1) | 72" Max |
| Grid Spacing (L2 x W2) | 2" x 2" 4" x 4"' 6" x 6" 8" x 8" 10" x 10" 12" x 12" |
| Conductor Size | #4 Solid Copper #6 Solid Copper #6 Copper-Clad Steel (30% or 40% Conductivity #8 Solid Copper #8 Copper-Clad Steel (30% or 40% Conductivity) |
| Center Wire Conductor Size | 1/0 Solid or Stranded 2/0 Solid or Stranded 4/0 Solid or Stranded 250 kcmil Stranded 300 kcmil Stranded 350 kcmil Stranded 500 kcmil Stranded |
| Overhang | Standard: Half Conductor Spacing + 2" (51 mm) With Center Wire With Overhanging Center Wire |
| | |

W2 and L2 available in listed Grid Spacing only.

GROUND MESH





FEATURED HIGHLIGHTS

- Prefabricated ground mesh wound into a roll format for shipping
- Silver brazed joints (35% silver alloy brazing material) provide strength to resist separation during installation and bear the traffic of heavy vehicles
- Conductor spacing in many rectangular configurations up to 24" x 48" (610 mm x 1219 mm) in 2" (51 mm) increments
- · Normally supplied in sections with standard overhang for interconnecting half conductor spacing + 2" (51 mm)

Prefabricated ground mesh from nVent ERICO is a convenient, efficient and economical means of improving grounding systems at facilities with high voltage installations and wherever large area grounds are required. Equipotential mesh reduces step potentials at power plants and substations, and effectively minimizes ground plane fluctuations at communications antenna sites. Wire mesh is also an excellent ground screen, reflector and electronic shield for large facilities.

Material: Copper, Copper-Bonded Steel


| Part Number | MESH |
|----------------|--|
| Length 2 (L2) | 2" - 24" |
| Width 1 (W1) | 20' Max |
| Width 2 (W2) | 2" - 48" |
| Conductor Size | #6 Solid Copper #6 Copper-Clad Steel (30% or 40% Conductivity) #8 Solid Copper #8 Copper-Clad Steel (30% or 40% Conductivity) #10 Solid Copper |
| Overhang | Standard: Half Conductor Spacing + 2" (51 mm) None Half Conductor Spacing |
| Unit Weight | 500 lb Max |


| Conductor Spacing (W2 x L2) | Copper-clad Steel Conductor (AWG) | | | Solid Copper | Solid Copper Conductor (AWG) | | |
|--------------------------------|-----------------------------------|---------|---------|--------------|------------------------------|---------|--|
| | #6 | #8 | #10 | #6 | #8 | #10 | |
| 2" x 2" | 888 lbs | 558 lbs | 351 lbs | 974 lbs | 609 lbs | 383 lbs | |
| 4" × 4" | 443 lbs | 279 lbs | 175 lbs | 487 lbs | 305 lbs | 192 lbs | |
| 6" x 6" | 295 lbs | 186 lbs | 117 lbs | 325 lbs | 203 lbs | 128 lbs | |
| 8" x 8" | 222 lbs | 139 lbs | 88 lbs | 243 lbs | 153 lbs | 96 lbs | |
| 12" × 12" | 148 lbs | 93 lbs | 59 lbs | 163 lbs | 102 lbs | 64 lbs | |
| 24" x 24" | 74 lbs | 47 lbs | 29 lbs | 91 lbs | 51 lbs | 32 lbs | |

Length 1 (L1) is unlimited, up to 500 lbs. (227 kg) maximum. Length 2 (L2) and Width 2 (W2) are available in 2" (51 mm) increments only.

EXPANDED COPPER MESH







FEATURED HIGHLIGHTS


• Produced from copper plate and contains no welds or joints

Material: Copper

| Part Number | Length | Width | Thickness | A | В |
|-----------------|--------|-------|-----------|------|----|
| EMMCU080X36X96A | 96" | 36" | 0.08" | 0.9" | 2" |

POOL MESH





FEATURED HIGHLIGHTS

• Convenient, efficient and economical solution for equipotential bonding grids for swimming pool applications

The requirements for bonding and grounding permanently installed indoor and outdoor swimming pools are provided in Article 680 "Swimming Pools, Fountains and Similar Installations" of the 2005 Edition of the National Electrical Code (NEC®). All of the bonded parts in or around swimming pools must be attached to an equipotential bonding grid. This grid must extend 3' (0.91 m) beyond the inside surface of the pool under concrete, stone or other paved walking surfaces.


Material: Copper

| Part Number | Length 1 | Width 1 | Grid Spacing | Conductor Size |
|----------------|----------|---------|--------------|----------------|
| POOLMESH2100 | 100' | 2' | 12" x 12" | #8 Solid |
| POOLMESH250 | 50' | 2' | 12" x 12" | #8 Solid |
| POOLMESH3100 | 100' | 3' | 12" x 12" | #8 Solid |
| POOLMESH350 | 50' | 3' | 12" x 12" | #8 Solid |

| Net Weight (lbs) per Standard Mat | | | | | | | | | | |
|-----------------------------------|---------------------------------|----------|---------|----------|---------|---------|---------|---------|-----------|---------|
| Grid Spacing | | | | | | | | | | |
| | 2" x 2" | | 4" x 4" | | 6" x 6" | | 8" x 8" | | 12" x 12" | |
| Conductor Size | Standard Mat Size (square feet) | | | | | | | | | |
| | 4' x 4' | 4' x 6' | 4' x 4' | 4' x 6' | 4' x 4' | 4' x 6' | 4' x 4' | 4' x 6' | 4' x 4' | 4' x 6' |
| #6 Copper-Clad Steel Wire | 14.6 lbs | 21.7 lbs | 7.6 lbs | 11.2 lbs | 5.3 lbs | 7.7 lbs | 4.1 lbs | 6 lbs | 2.9 lbs | 4.2 lbs |
| #8 Copper-Clad Steel Wire | 9.2 lbs | 13.7 lbs | 4.8 lbs | 7.1 lbs | 3.3 lbs | 4.9 lbs | 2.6 lbs | 3.8 lbs | 1.9 lbs | 2.7 lbs |

Weights are for copper-clad steel wire. Add 10% for approximate weight of solid copper wire. Mats are palletized for shipment. Add 50 lbs per pallet for gross weight. Maximum of 100 mats per pallet.

SIGNAL REFERENCE GRID

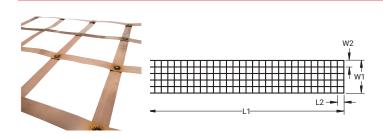

FEATURED HIGHLIGHTS

- Provides a low impedance equipotential plane to protect sensitive electronic equipment from transient noise
- Pre-engineered welded grid of 26 gauge copper strips reduces voltage differences between interconnected electronic equipment
- Welded connections do not deteriorate, corrode or loosen with time
- · Can be easily field-welded to suit any size computer room
- Complies with IEEE® Standard 1100-1992




Material: Copper

| Part | | | | | |
|----------|----------|---------|--------------|-----------|-------------|
| Number | Length 1 | Width 1 | Grid Spacing | Thickness | Strip Width |
| SRGBD100 | 100' | 10' | 24" x 24" | 0.016" | 2" |
| SRGBE100 | 100' | 12' | 24" x 24" | 0.016" | 2" |
| SRGBG100 | 100' | 16' | 24" x 24" | 0.016" | 2" |

Custom sizes available upon request. Contact your nVent ERICO representative for more information.

COPPER GROUND PLATE





FEATURED HIGHLIGHTS


- $\boldsymbol{\cdot}$ Provides a large surface area to dissipate current into the ground
- Available in a variety of sizes and pigtail configurations

| GPE-C-E-A-H-024-1L-024-(T) | | |
|----------------------------|--|---|
| GPE | Ground Plate Electrode | |
| С | Material | A: Steel (HRS M1020) B: Stainless Steel (SS304) C: Copper (C11000) D: Galvanized Steel |
| D: Galvanized Steel | | |
| E | Pigtail Connection Type | C: Continuous (2 x "L J" nVent ERICO Cadweld Connection) E: End ("L J" Cadweld Connection Style) N: No Pigtail |
| A | Plate Thickness Code (Stock Tolerance) | A: 1/32" (Min. for Lightning – Cu) B: 1/16" (Min. for Power – Cu) C: 3/32" D: 1/8" E: 1/4" (Min. for Power – Stl.) F: 3/8" G: 1/2" H: 1/64" (26 Gauge) J: 3/16" |
| Н | Plate Width Code | A: 1" · B: 2" · C: 3" · D: 4" · E: 5" · F: 6" · G: 9" · H: 12" · J: 18" K: 24" · L: 30" · M: 36" · N: 42" · P: 48" · Q: 17" · R: 10" |
| 024 | Plate Length Code (inches) (3 digits required) | |
| 1 <u>L</u> * | Pigtail Cable Type (nVent ERICO Cable Code) | |
| 024* | Pigtail Length (inches) | |
| (T)* | Tinned | |

Pigtail Connection








| Part Number | Width | Length | Pigtail Connection | Pigtail Length | Conductor Size | Thickness |
|--------------------------|-------|-----------|--------------------|----------------|--------------------|-----------|
| GPECCAM036 | 36" | 36" | None | | | 1/32" |
| GPECCAM0361H024 | 36" | 36" | Continuous | 24" | #6 Stranded | 1/32" |
| GPECCBJ0181T024 | 18" | 18" | Continuous | 24" | #2 Solid | 1/16" |
| GPECCBJ0181T060 | 18" | 18" | Continuous | 60" | #2 Solid | 1/16" |
| GPECCBJ181T108S | 18" | 18" | Continuous | 108" | #2 Solid | 1/16" |
| GPECCDK0241L024 | 24" | 24" | Continuous | 24" | #4 Stranded | 1/8" |
| GPECCEK0242C036 | 24" | 24" | Continuous | 36" | 1/0 Stranded | 1/4" |
| GPECEAJ0181G024 | 18" | 18" | End | 24" | #6 Solid | 1/32" |
| SPECEAJ0241G024 | 18" | 24" | End | 24" | #6 Solid | 1/32" |
| GPECEAK0241G024 | 24" | 24" | End | 24" | #6 Solid | 1/32" |
| SPECEAK0241H024 | 24" | 24" | End | 24" | #6 Stranded | 1/32" |
| GPECEAK0242V024 | 24" | 24" | End | 24" | 250 kcmil Stranded | 1/32" |
| SPECEAM0361H024 | 36" | 36" | End | 24" | #6 Stranded | 1/32" |
| PECEAM0362V012 | 36" | 36" | End | 12" | 250 kcmil Stranded | 1/32" |
| SPECEAP0481H024 | 48" | 48" | End | 24" | #6 Stranded | 1/32" |
| SPECEBH0121V024 | 12" | 12" | End | 24" | #2 Stranded | 1/16" |
| SPECEBH0241K024 | 12" | 24" | End | 24" | #4 Solid | 1/16" |
| GPECEBQ0171G120 | 17" | 17" | End | 120" | #6 Solid | 1/16" |
| GPECEDK0241L024 | 24" | 24" | End | 24" | #4 Stranded | 1/10 |
| | | | | | | |
| SPECEDK0242Q036 | 24" | 24" | End | 36" | 4/0 Stranded | 1/8" |
| SPECEEK0241T024 | 24" | 24" | End | 24" | #2 Solid | 1/4" |
| GPECEEK0242Q008 | 24" | 24" | End | 8" | 4/0 Stranded | 1/4" |
| GPECEEK0242Q060 | 24" | 24" | End | 60" | 4/0 Stranded | 1/4" |
| GPECEEK0242Q120 | 24" | 24" | End | 120" | 4/0 Stranded | 1/4" |
| GPECEEK0242Q180 | 24" | 24" | End | 180" | 4/0 Stranded | 1/4" |
| GPECEEK0361T024 | 24" | 36" | End | 24" | #2 Solid | 1/4" |
| GPECNAJ018 | 18" | 18" | None | | | 1/32" |
| GPECNAK024 | 24" | 24" | None | | | 1/32" |
| SPECNBH012 | 12" | 12" | None | | | 1/16" |
| SPECNBH024 | 12" | 24" | None | | | 1/16" |
| GPECNDF006 | 6" | 6" | None | | | 1/8" |
| SPECNDH024 | 12" | 24" | None | | | 1/8" |
| SPECNEB024 | 2" | 24" | None | | | 1/4" |
| SPECNED004 | 4" | 4" | None | | | 1/4" |
| SPECNED012 | 4" | 12" | None | | | 1/4" |
| GPECNED014 | 4" | 14" | None | | | 1/4" |
| SPECNED096 | 4" | 96" | None | | | 1/4" |
| SPECNEG024 | 9" | 24" | None | | | 1/4" |
| PECNEH016 | 12" | 16" | None | | | 1/4" |
| SPECNEK024 | 24" | 24" | None | | | 1/4" |
| SPECNEM040 | 36" | 40" | None | | | 1/4" |
| SPECNEN040 | 42" | 40" | None | | | 1/4" |
| SPECNFH033 | 12" | 33" | None | | | 3/8" |
| SPECNFK024 | 24" | 24" | None | | | 3/8" |
| SPECNGF012 | 6" | 12" | None | | | 1/2" |
| SPECNGK024 | 24" | 24" | None | | | 1/2" |
| SPECNGKU24 SPECNHM096 | 36" | 24 96" | | | | 1/2 |
| Finish: Tinned | 3U | 30 | None | | | 1/04 |
| | 26" | 26" | Continuous | 10" | #2 Colid | 1/0" |
| SPECCDM0361T10T | 36" | 36" | Continuous | 10" | #2 Solid | 1/8" |
| SPECEJK0361T24T | 24" | 36" | End | 24" | #2 Solid | 3/16" |
| GPECNDK024T | 24" | 24" | None | | | 1/8" |
| GPECNDM036T | 36" | 36" | None | | | 1/8" |

COPPER GROUND PLATE WITH BENT CORNERS





FEATURED HIGHLIGHTS

- Used to ground utility poles
- $\boldsymbol{\cdot}$ The corners of the ground plate are nailed into the base of the pole

Material: Copper

| Part Number | Length | Width | Thickness | Hole Size | Conductor Size | Pigtail Included | Pigtail Length | | |
|--|---|-------|-----------|-----------|----------------|------------------|----------------|--|--|
| Finish: Bare - | Finish: Bare — Type: Ground Plate, No Holes | | | | | | | | |
| GPECEHX1 | 17" | 17" | 0.064" | | #6 Solid | Yes | 12' | | |
| GPECEHX3 | 17" | 17" | 0.064" | | #2 Stranded | Yes | 12' | | |
| Finish: Tinned — Type: Ground Plate With Holes | | | | | | | | | |
| GPECEHX1T | 17" | 17" | 0.064" | 1/2" | #6 Solid | Yes | 12' | | |

The pigtail for GPECEHX1T is tinned, but the plate itself is bare copper.

COPPER GROUND PLATE WITH CABLE ATTACHMENTS



FEATURED HIGHLIGHTS

- Bonding plates provide mechanical attachment points to ground plate
- Listed to UL® 96





| Part Number | Width | Length | Thickness |
|--------------------------------|-------|--------|-----------|
| Number of Cable Attachments: 1 | | | |
| LPC753 | 12" | 24" | 20 GA |
| LPC754 | 18" | 18" | 20 GA |
| LPC755 | 36" | 36" | 20 GA |
| Number of Cable Attachments: 2 | | | |
| LPC750 | 12" | 24" | 20 GA |
| LPC751 | 18" | 18" | 20 GA |
| LPC752 | 36" | 36" | 20 GA |
| LPC756 | 24" | 24" | 20 GA |





FEATURED HIGHLIGHTS


- Provides a large surface area to dissipate current into the ground
- Wrap around the bottom of a utility pole to install

| Part Number | Connector | Length | Width | Thickness | Standard Packaging Quantity |
|----------------|-----------------|---------|--------|-----------|--------------------------------|
| UGP719 | SRGC46 | 19 1/4" | 7 1/2" | 1/16" | 1 pc |
| UGP719BP5 | SRGC46 | 19 1/4" | 7 1/2" | 1/16" | 5 pc |
| UGP719SBP5 | ESB2 Split Bolt | 19 1/4" | 7 1/2" | 1/16" | 5 pc |
| UGP738 | SRGC46 | 38 1/2" | 7 1/2" | 1/16" | 1 pc |
| UGP738P10 | SRGC46 | 38 1/2" | 7 1/2" | 1/16" | 10 pc |
| UGP738P5 | SRGC46 | 38 1/2" | 7 1/2" | 1/16" | 5 pc |
| UGP738SBP5 | ESB2 Split Bolt | 38 1/2" | 7 1/2" | 1/16" | 5 pc |

COPPER UTILITY POLE BOTTOM PLATE








FEATURED HIGHLIGHTS

- Integrated connector provides a convenient method for terminating the grounding conductor
- Quick and easy installation
- Cost-effective ground electrode solution
- Manufactured of corrosion-resistant electrolytic copper
- Construction meets the requirements of the NESC®
- Fix cable and nail to base before raising pole

Material: Copper

| Part | | | | |
|----------|------------|---|----------|-----------|
| Number | Connector | Conductor Size | Diameter | Thickness |
| EGP100 | Lug | #14 Solid - #4 Stranded, 2.5 mm² Stranded - 16 mm² Stranded | 7 1/2" | 0.025" |
| EGP100HL | Hammerlock | #14 Solid - #4 Stranded, 2.5 mm² Stranded - 16 mm² Stranded | 7 1/2" | 0.025" |

STEEL GROUND PLATE



FEATURED HIGHLIGHTS

- Provides a large surface area to dissipate current into the ground
- Includes a welded steel rod pigtail







| Part Number | Connector | Length 1 | Length 2 | Width | Thickness | Diameter | Certifications | |
|---------------------------|-----------|----------|----------|-------|-----------|----------|----------------|--|
| Finish: Electrogalvanized | | | | | | | | |
| EGGP | None | 16" | 2" | 10" | 1/4" | 5/8" | C-CSA-US | |
| EGGPC | HDC58 | 16" | 2" | 10" | 1/4" | 5/8" | C-CSA-US | |
| Finish: Plain | | | | | | | | |
| EBGP | None | 16" | 2" | 10" | 1/4" | 5/8" | | |

B162 EARTHPOINT, TWO STUD







FEATURED HIGHLIGHTS

- · Long-lasting design
- · Low ground resistance and impedance
- Superior electrical conductivity and resistance to corrosion
- Electrically and mechanically robust and reliable
- Easy to install as a Prefabricated Earthbridge once Cadweld welded to a piece of conductor


Material: Brass


| Part Number | Width 1 | Width 2 | Depth | Height | Diameter | Thread Size | |
|----------------|---------|---------|--------|--------|----------|-------------|--|
| B1622Q | 1 3/4" | 3 1/4" | 1 5/8" | 3" | 0.53" | 1/2 UNC | |

Assemblies require conductors and Cadweld connections, which must be ordered separately.

B161/B164 EARTHPOINT, FOUR STUD







FEATURED HIGHLIGHTS

- · Long-lasting design
- Low ground resistance and impedance
- Superior electrical conductivity and resistance to corrosion
- Electrically and mechanically robust and reliable
- Easy to install as a Prefabricated Earthbridge once Cadweld welded to a piece of conductor


Material: Brass


| Part Number | Width 1 | Width 2 | Depth 1 | Depth 2 | Height | Diameter | Thread Size |
|----------------|---------|---------|---------|---------|--------|----------|-------------|
| B1612Q | 1 1/4" | 2 1/2" | 1" | 2 1/4" | 3" | 0.530" | 3/8 UNC |
| B1613Q | 1 1/4" | 2 1/2" | 1" | 2 1/4" | 3" | 0.825" | 3/8 UNC |
| B1642Q | 1 3/4" | 3 1/4" | 1 3/4" | 3 1/4" | 3" | 0.530" | 1/2 UNC |
| B1643Q | 1 3/4" | 3 1/4" | 1 3/4" | 3 1/4" | 3" | 0.825" | 1/2 UNC |

Assemblies require conductors and Cadweld connections, which must be ordered separately.

GROUND POINT







FEATURED HIGHLIGHTS

- · Cast grounding plate for equipment, machinery, or structure grounding points
- May be installed flush in concrete floor or wall
- · Cable connection under bolt tension

Material: Brass

| Part Number | Conductor Size, UL | Thread Size | Depth | Width | A | Unit Weight |
|----------------|-----------------------------|-------------|--------|--------|--------|-------------|
| LPC682 | Class 1 - Class 2 (4/0 Max) | 1/2 UNC | 3 1/4" | 3 1/4" | 1 3/4" | 1.535 lb |

REBAR BONDING KIT, SINGLE CONNECTION



FEATURED HIGHLIGHTS

- Kit includes Rebar Bonding Plate, Rebar Bonding Clamp and conductor
- Provides ground system connection points in concrete structures
- · Used for equipment, machinery and structure grounding



Material: Brass, Copper

| Part | | | | | | |
|------------|----------------|--------------|-------------|----|-------------|--|
| Number | Conductor Type | Cable Length | Thread Size | Α | Unit Weight | |
| LPC46740X1 | LPC404 | 3' | 1/2 UNC | 4" | 3.218 lb | |
| LPC467X1 | LPC401 | 3' | 1/2 UNC | 4" | 2.400 lb | |

REBAR BONDING KIT, DUAL CONNECTION



FEATURED HIGHLIGHTS


- Kit includes Rebar Bonding Plate, two Rebar Bonding Clamps and two conductors
- Provides ground system connection points in concrete structures
- · Used for equipment, machinery and structure grounding




Material: Brass, Copper

| Part | | | | | | |
|------------|----------------|--------------|-------------|----|-------------|--|
| Number | Conductor Type | Cable Length | Thread Size | Α | Unit Weight | |
| LPC46740X2 | LPC404 | 3' | 1/2 UNC | 4" | 5.792 lb | |
| LPC467X2 | LPC401 | 3' | 1/2 UNC | 4" | 4.154 lb | |

Cable Length represents the length of a single conductor.

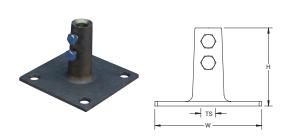



FEATURED HIGHLIGHTS

- Provides ground system connection points in concrete structures
- Used for equipment, machinery and structure grounding



Material: Brass

| Part Number | Conductor Size | Thread Size | Depth | Height | Width | A | Hole Size | Unit Weight |
|----------------|--------------------------------|-------------|-------|--------|-------|----|-----------|-------------|
| LPC467 | 2/0 Stranded - 4/0 Stranded | 1/2 UNC | 4" | 2.92" | 4" | 3" | 0.45" | 0.644 lb |


GROUND POINT ASSEMBLY




FEATURED HIGHLIGHTS


- Convenient ground system connection points in concrete
- Used for equipment, machinery and structure grounding
- Results in maximum current-carrying capacity equal to the cross-sectional area of the conductor or stud
- The Cadweld connection between the stud and pigtail will not loosen or corrode

Ground Plate Configuration

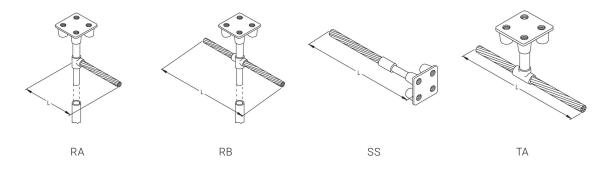

Ground Plate Configuration

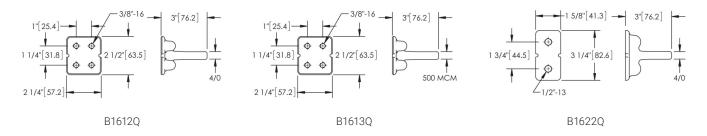

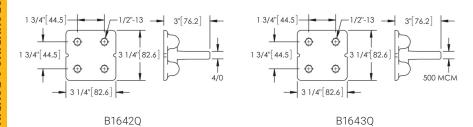

| | | B530-A-2Q-72 |
|------|----------------------------|---|
| B530 | Ground Plate Configuration | B530 = RA B531 = RB B532 = SS B533 = TA |
| А | Ground Plate Part Number | A = B1612Q B = B1613Q C = B1622Q D = B1642Q E = B1643Q |
| 2Q | Cable Code | 1G = #6 Solid 1L = #4 Stranded 1V = #2 Stranded 2C = 1/0 Stranded 2G = 2/0 Stranded 2Q = 4/0 Stranded 2V = 250 MCM Stranded 3D = 350 MCM Stranded 3Q = 500 MCM Stranded |
| 72 | Cable Length (inches) | |

Material: Copper Alloy


| Part Number | Ground Plate Configuration | Ground Plate Part Number | Conductor Size | Cable Length |
|----------------|----------------------------|--------------------------|----------------|--------------|
| B530A1L12 | RA | B1612Q | #4 Stranded | 12" |
| B530A1V12 | RA | B1612Q | #2 Stranded | 12" |
| B530A2Q48 | RA | B1612Q | 4/0 Stranded | 48" |
| B530A2Q72 | RA | B1612Q | 4/0 Stranded | 72" |
| B530B2G24 | RA | B1613Q | 2/0 Stranded | 24" |
| B530C1L048 | RA | B1622Q | #4 Stranded | 48" |
| B530C2C24 | RA | B1622Q | 1/0 Stranded | 24" |
| B530C2G48 | RA | B1622Q | 2/0 Stranded | 48" |
| B530C2Q36 | RA | B1622Q | 4/0 Stranded | 36" |
| B530C2Q48 | RA | B1622Q | 4/0 Stranded | 48" |
| B530C2Q96 | RA | B1622Q | 4/0 Stranded | 96" |
| B530D2C48 | RA | B1642Q | 1/0 Stranded | 48" |
| B530D2G18 | RA | B1642Q | 2/0 Stranded | 18" |
| B530D2G180 | RA | B1642Q | 2/0 Stranded | 180" |
| B530D2G24 | RA | B1642Q | 2/0 Stranded | 24" |
| B530D2G48 | RA | B1642Q | 2/0 Stranded | 48" |
| B530D2Q12 | RA | B1642Q | 4/0 Stranded | 12" |
| B530D2Q120 | RA | B1642Q | 4/0 Stranded | 120" |
| B530D2Q144 | RA | B1642Q | 4/0 Stranded | 144" |
| B530D2Q180 | RA | B1642Q | 4/0 Stranded | 180" |
| B530D2Q24 | RA | B1642Q | 4/0 Stranded | 24" |
| B530D2Q32 | RA | B1642Q | 4/0 Stranded | 32" |
| B530D2Q36 | RA | B1642Q | 4/0 Stranded | 36" |
| B530D2Q48 | RA | B1642Q | 4/0 Stranded | 48" |
| B530D2Q72 | RA | B1642Q | 4/0 Stranded | 72" |
| B530D2Q96 | RA | B1642Q | 4/0 Stranded | 96" |
| B531A2Q36 | RB | B1612Q | 4/0 Stranded | 36" |
| B531D2G24 | RB | B1642Q | 2/0 Stranded | 24" |
| B531D2Q12 | RB | B1642Q | 4/0 Stranded | 12" |
| B531D2Q120 | RB | B1642Q | 4/0 Stranded | 120" |
| B531D2Q144 | RB | B1642Q | 4/0 Stranded | 144" |
| B531D2Q24 | RB | B1642Q | 4/0 Stranded | 24" |
| B531D2Q48 | RB | B1642Q | 4/0 Stranded | 48" |
| B531D2Q6 | RB | B1642Q | 4/0 Stranded | 6" |
| B531D2Q72 | RB | B1642Q | 4/0 Stranded | 72" |


| Part Number | Ground Plate Configuration | Ground Plate Part Number | Conductor Size | Cable Length |
|----------------|----------------------------|--------------------------|--------------------|--------------|
| B531D2Q96 | RB | B1642Q | 4/0 Stranded | 96" |
| B532A2O48 | SS | B16120 | 4/0 Stranded | 48" |
| B532C2G24 | SS | B1622Q | 2/0 Stranded | 24" |
| B532C2G60 | SS | B1622Q | 2/0 Stranded | 60" |
| B532C2Q240 | SS | B1622Q | 4/0 Stranded | 240" |
| B532C2Q48 | SS | B1622Q | 4/0 Stranded | 48" |
| B532C2V48 | SS | B1622Q | 250 kcmil Stranded | 48" |
| B532C3Q48 | SS | B16220 | 500 kcmil Stranded | 48" |
| B532D1L48 | SS | B1642Q | #4 Stranded | 48" |
| B532D1V36 | SS | B16420 | #2 Stranded | 36" |
| B532D2C24 | SS | B1642Q | 1/0 Stranded | 24" |
| B532D2C36 | SS | B1642Q | 1/0 Stranded | 36" |
| B532D2G12 | SS | B1642Q | 2/0 Stranded | 12" |
| B532D2G48 | SS | B1642Q | 2/0 Stranded | 48" |
| B532D2Q36 | SS | B1642Q | 4/0 Stranded | 36" |
| B532D2Q40 | SS | B1642Q | 4/0 Stranded | 40" |
| B532D2Q48 | SS | B1642Q | 4/0 Stranded | 48" |
| B532D2Q50 | SS | B1642Q | 4/0 Stranded | 50" |
| B532D2Q72 | SS | B1642Q | 4/0 Stranded | 72" |
| B532E3D96 | SS | B1643Q | 350 kcmil Stranded | 96" |
| B532E3Q48 | SS | B1643Q | 500 kcmil Stranded | 48" |
| B532E3Q96 | SS | B1643Q | 500 kcmil Stranded | 96" |
| B533A2G48 | TA | B1612Q | 2/0 Stranded | 48" |
| B533A2Q24 | TA | B1612Q | 4/0 Stranded | 24" |
| B533C2Q48 | TA | B1622Q | 4/0 Stranded | 48" |
| B533D2Q12 | TA | B1642Q | 4/0 Stranded | 12" |
| B533D2Q24 | TA | B1642Q | 4/0 Stranded | 24" |
| B533D2Q48 | TA | B1642Q | 4/0 Stranded | 48" |

 $\hbox{\it Custom lengths available. Please contact nVent ERICO for details.}$

AIRCRAFT GROUNDING RECEPTACLE WITH BAR ATTACHMENT POINT







FEATURED HIGHLIGHTS

- Castings for use in static grounding systems of refueling areas
- Suitable as a combination tie down and static ground point
- Easily connected to grounding system conductor and/or ground rods
- Designed for simple installation with flush paved surfaces
- Compatible with Cadweld connections


Material: Phosphor Bronze

| Part Number | Diameter 1 | Diameter 2 | Depth | Attachment Point | Pipe Size | Connection Type |
|----------------|------------|------------|--------|---------------------|-----------|-----------------|
| B166 | 3 7/8" | 3 5/8" | 6 1/4" | 3/4" Diameter Bar | 1/2" | RA, RB |
| B167 | 4 3/4" | 4 13/32" | 7 1/4" | 1 1/2" Diameter Bar | 1/2" | RA, RB |

AIRCRAFT GROUNDING RECEPTACLE WITH BALL STUD







FEATURED HIGHLIGHTS

- Castings for use in static grounding systems of refueling areas
- Easily connected to grounding system conductor and/or ground rods
- Designed for simple installation with flush paved surfaces
- · Compatible with Cadweld connections

Material: Phosphor Bronze

| Part Number | Diameter 1 | Diameter 2 | Depth | Attachment Point | Pipe Size | Connection Type |
|----------------|------------|------------|--------|--------------------------|-----------|-----------------|
| B165 | 2 3/4" | 2 3/16" | 4 1/2" | Permanent 5/8" Ball Stud | 1/2" | RA, RB |
| B165R | 2 3/4" | 2 3/16" | 4 1/2" | Removable 5/8" Ball Stud | 1/2" | RA, RB |

AIRCRAFT GROUNDING RECEPTACLE REPLACEMENT BALL STUD



FEATURED HIGHLIGHTS

• Replacement ball stud for B165R Aircraft Grounding Receptacle


Material: Phosphor Bronze

Part Number

B165RS

AIRCRAFT GROUNDING RECEPTACLE REPLACEMENT COVER





FEATURED HIGHLIGHTS

- Replacement covers available for Aircraft Grounding Receptacles
- · Includes cover only, without chain or spring clip


Material: Phosphor Bronze

| Part Number | For Use With | Diameter |
|----------------|----------------|----------|
| B165B | B165 and B165R | 2 3/16" |
| B166B | B166 | 3 5/8" |
| B167B | B167 | 4 13/32" |

AIRCRAFT GROUNDING RECEPTACLE FOR SECTIONALGROUND RODS







FEATURED HIGHLIGHTS


- · Castings for use in static grounding systems of refueling areas
- Designed for simple installation with flush paved surfaces
- Standard pin connection
- Chain-retained cover plate
- Couple directly to 3/4" (nominal) sectional or extension rod
- LPC681 includes spring clip to secure the cover plate
- · Listed to UL® 96

Material: Bronze

| Part Number | Diameter | Height | Attachment Point | Spring Clip Included |
|----------------|----------|--------|--------------------------|----------------------|
| LPC680 | 2 3/4" | 3 1/2" | Permanent 3/4" Ball Stud | No |
| LPC681 | 2 3/4" | 3 1/2" | Permanent 3/4" Ball Stud | Yes |

AIRCRAFT GROUNDING TIE DOWN





FEATURED HIGHLIGHTS

• Used as an attachment point for static grounding

Material: Copper-Bonded Steel, Bronze

| Part Number | Diameter | Length | Thread Size | A | В |
|----------------|----------|--------|-------------|----|----|
| 663400 | 2" | 10' | 3/4 UNC | 5" | 1" |

AIRCRAFT GROUNDING TIE DOWN MOLD





FEATURED HIGHLIGHTS

• Plastic mold for making depression in concrete pour around loop in Aircraft Grounding Tie Down

Material: High-Impact Polystyrene

| Part Number | Length | Width | Depth |
|----------------|--------|-------|-------|
| DM5834 | 6" | 3" | 2.9" |

AIRCRAFT GROUNDING CLAMP



FEATURED HIGHLIGHTS

- Fits ground rods up to 3/4" nominal and nVent ERICO Aircraft Grounding Receptacles B165 and B166
- Cast aluminum construction with plated steel jaws
- Aviation industry standard for bonding and grounding aircraft and refueling vehicles
- Ideal for attaching to landing gear, posts, ground balls, ground rods and other curved unpainted surfaces
- Complies with Mil Spec M83413/7-1

Material: Aluminum, Steel

| Part Number | Jaw Opening | Throat Depth | Harness Included |
|----------------|-------------|--------------|------------------|
| B2617A | 3/4" Max | 3/4" | No |

STATIC GROUNDING CLAMP FOR DRUMS



FEATURED HIGHLIGHTS

- Designed specifically for grounding or bonding small containers, drums, totes, machinery or personnel in areas containing flammable liquids or dust
- Plier-type clamp has a die cast aluminum body with two stainless steel points and a hefty 55 pound (25 kg) spring compression
- Design allows the clamp to penetrate multiple layers of paint or corrosion build-up so that proper contact is made to bare metal

Material: Aluminum, Stainless Steel 416 (EN 1.4005)

| Part Number | Jaw Opening | Throat Depth | Harness Included |
|----------------|-------------|--------------|------------------|
| B2610A | 1" Max | 1" | No |

FM is a registered certification mark of FM Approvals LLC, LTD.

STATIC GROUNDING CABLE REEL, BARE CABLE



FEATURED HIGHLIGHTS

- · Includes a stop at the end of the retractable cable
- Typically used with B2610A Static Grounding Clamp For Drums (sold separately)

Material: Steel Finish: Electrogalvanized

| Part Number | Product | Diameter | Length |
|----------------|---|----------|--------|
| B2618A | Cable for grounding flammable drums and totes | 3/32" | 20' |
| B2618B | Cable for grounding tanker trucks and rail cars | 3/32" | 50' |

Containers with flammable liquid should remain closed until bonding and grounding is complete, because an initial spark may occur during the connection of grounding equipment which could ignite vapors or gases.


Grounding Busbars


GROUNDING BUSBAR - ELECTRICAL BUSBAR




FEATURED HIGHLIGHTS

- Provides a convenient, single-point grounding and bonding location
- Conductors are welded to the bar using a Cadweld exothermic connection or are mechanically fastened by using lugs
- Custom bars can be designed and manufacturerd to customer specifications

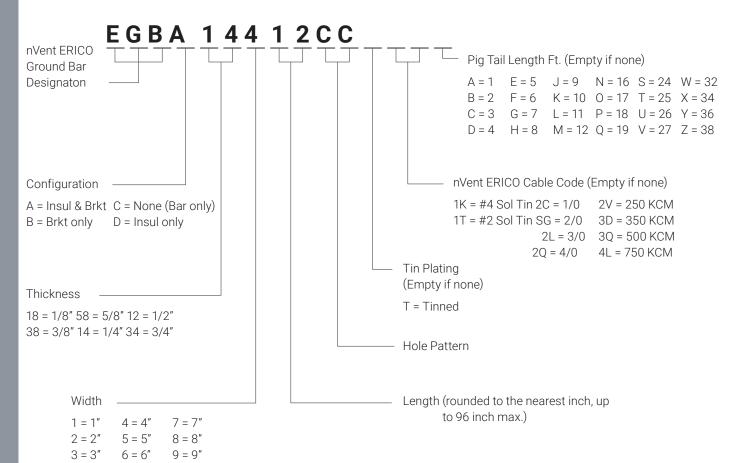

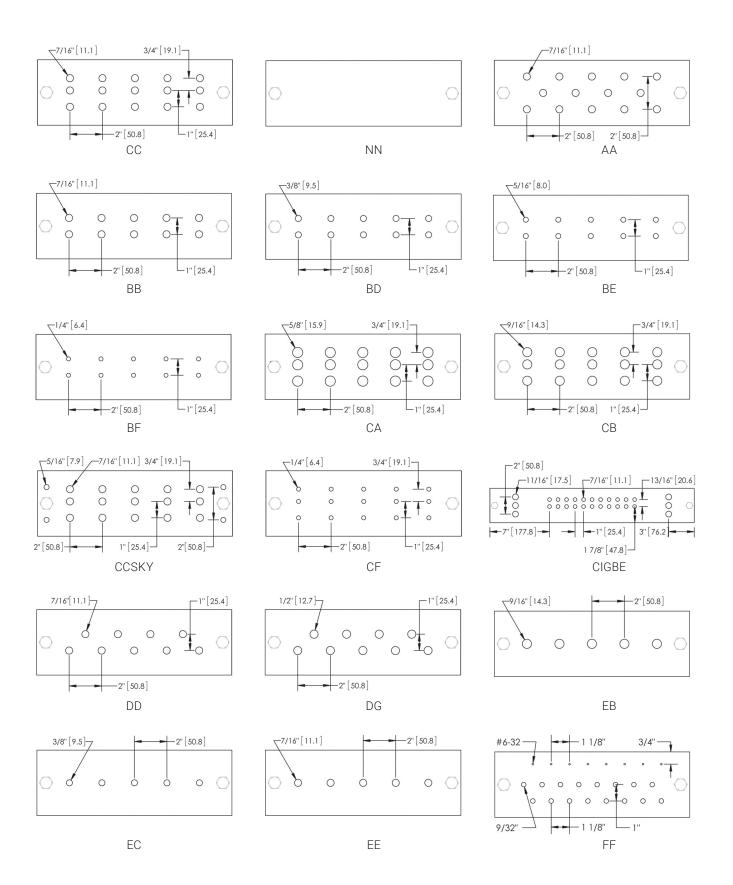


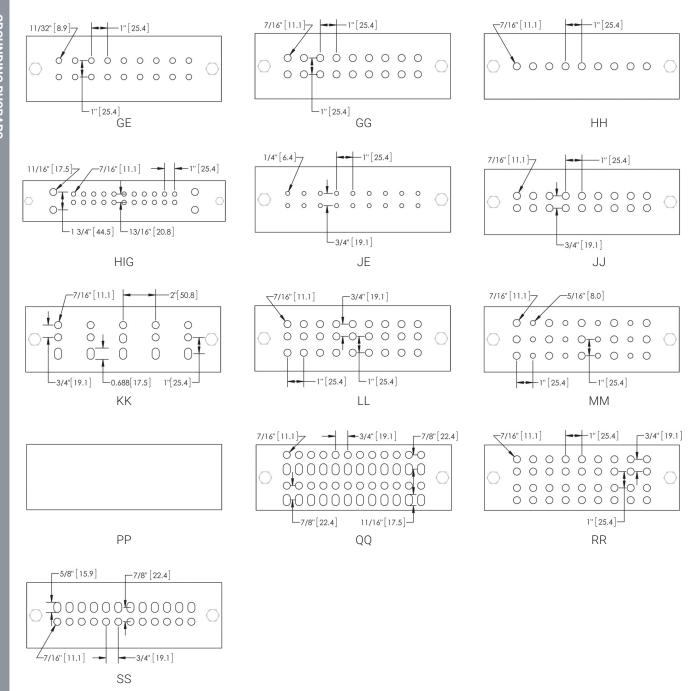

| Global Part Number | Hole Pattern | Mounting Hole Size | Length | Width | Thickness | Tin Plating | Pigtail Included |
|-----------------------|-----------------|-----------------------|--------|-------------|-----------|-------------|---------------------|
| EGBA14112EE | EE | 0.438" | 12" | width 1" | 1/4" | No | No Pigtail included |
| EGBA14212BB | BB | 0.438" | 12" | 2" | 1/4" | No | No |
| FGBA14212FF | EE | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212HH | HH | | 12" | 2" | 1/4" | No | No |
| | | 0.438" | | | , | | |
| EGBA14212NN | NN | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212TES | TES | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14215JJ | JJ | 0.438" | 15" | 2" | 1/4" | No | No |
| EGBA14215TES | TES | 0.438" | 15" | 2" | 1/4" | No | No |
| EGBA14224NN | NN | 0.438" | 24" | 2" | 1/4" | No | No |
| EGBA14406CC | CC | 0.438" | 6" | 4" | 1/4" | No | No |
| EGBA14410FF | FF | 0.438" | 10" | 4" | 1/4" | No | No |
| EGBA14412AA | AA | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412BB | BB | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412CC | CC | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412GG | GG | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412LL | LL | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412MM | MM | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412NN | NN | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14420CC | CC | 0.438" | 20" | 4" | 1/4" | No | No |
| EGBA14420CCT | CC | 0.438" | 20" | 4" | 1/4" | Yes | No |
| EGBA14420NN | NN | 0.438" | 20" | 4" | 1/4" | No | No |
| EGBA14424CC | CC | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424GG | GG | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424LL | LĹ | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424MM | MM | 0.438" | 24" | 4" | 1/4" | No | No |
| FGBA14424NN | NN | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14436CC | CC | 0.438" | 36" | 4" | 1/4" | No | No |

TELECOM GROUNDING BUSBAR





Material: Copper Width: 2" Thickness: 1/4"

FEATURED HIGHLIGHTS


- Meets TIA-607-C and conforms to BICSI® recommendations
- · Complies with NEMA® standards
- Accepts two hole lugs with 5/16" or 7/16" bolt holes (hardware not included)
- Telecom grounding busbar splice kits are available to extend the length of the busbar



| 1111CK11E33. 1/4 | | | | | | | | | |
|------------------|----------|----------|----------------|-----------------------------------|----------------|-----------------------------------|----|--------|------|
| Part Number | Length 1 | Length 2 | Hole Size 1 | Hole Size 1 Number of Pairs | Hole Size 2 | Hole Size 2 Number of Pairs | A | В | С |
| Tin Plating: No | | | | | | | | | |
| TGBA12L06P | 12" | 9" | 5/16" | 6 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA16L08P | 15 1/2" | 9" | 5/16" | 8 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA18L10P | 17 3/4" | 9" | 5/16" | 10 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA20L12P | 20" | 9" | 5/16" | 12 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA24L14P | 24" | 18" | 5/16" | 14 | 7/16" | 5 | 1" | 1 1/8" | 5/8" |
| TGBA29L18P | 29" | 18" | 5/16" | 18 | 7/16" | 5 | 1" | 1 1/8" | 5/8" |
| Tin Plating: Yes | | | | | | | | | |
| TGBA12L06PT | 12" | 9" | 5/16" | 6 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA16L08PT | 15 1/2" | 9" | 5/16" | 8 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA18L10PT | 17 3/4" | 9" | 5/16" | 10 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA20L12PT | 20" | 9" | 5/16" | 12 | 7/16" | 3 | 1" | 1 1/8" | 5/8" |
| TGBA24L14PT | 24" | 18" | 5/16" | 14 | 7/16" | 5 | 1" | 1 1/8" | 5/8" |
| TGBA29L18PT | 29" | 18" | 5/16" | 18 | 7/16" | 5 | 1" | 1 1/8" | 5/8" |
| | | | | | | | | | |

TELECOM MAIN GROUNDING BUSBAR



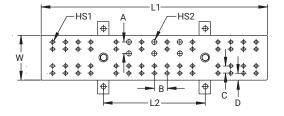

FEATURED HIGHLIGHTS

- Meets TIA-607-C and conforms to BICSI® recommendations
- Complies with NEMA® standards
- Accepts two hole lugs with 5/16" or 7/16" bolt holes (hardware not included)
- Telecom grounding busbar splice kits are available to extend the length of the busbar


Material: Copper Width: 4" Thickness: 1/4"



| Part Number | Length 1 | Length 2 | Hole Size 1 | Hole Size 1 Number of Pairs | Hole Size 2 | Hole Size 2 Number of Pairs | A | В | С | D |
|-----------------|----------|----------|-------------|-----------------------------------|-------------|-----------------------------------|----|--------|------|------|
| Tin Plating: No | | | | | | | | | | |
| TMGBA12L15P | 12" | 9" | 5/16" | 15 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA16L19P | 15 1/2" | 9" | 5/16" | 19 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA18L23P | 17 3/4" | 9" | 5/16" | 23 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |

| Part Number | Length 1 | Length 2 | Hole Size 1 | Hole Size 1 Number of Pairs | Hole Size 2 | Hole Size 2 Number of Pairs | A | В | С | D |
|------------------|----------|----------|-------------|-----------------------------------|-------------|-----------------------------------|----|--------|------|------|
| TMGBA20L27P | 20" | 9" | 5/16" | 27 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA24L33P | 24" | 18" | 5/16" | 33 | 7/16" | 5 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA29L41P | 29" | 18" | 5/16" | 41 | 7/16" | 5 | 1" | 1 1/8" | 5/8" | 5/8" |
| Tin Plating: Yes | | | | | | | | | | |
| TMGBA12L15PT | 12" | 9" | 5/16" | 15 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA16L19PT | 15 1/2" | 9" | 5/16" | 19 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA18L23PT | 17 3/4" | 9" | 5/16" | 23 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA20L27PT | 20" | 9" | 5/16" | 27 | 7/16" | 3 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA24L33PT | 24" | 18" | 5/16" | 33 | 7/16" | 5 | 1" | 1 1/8" | 5/8" | 5/8" |
| TMGBA29L41PT | 29" | 18" | 5/16" | 41 | 7/16" | 5 | 1" | 1 1/8" | 5/8" | 5/8" |

TELECOM GROUNDING BUSBAR SPLICE KIT

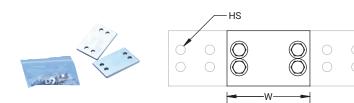

FEATURED HIGHLIGHTS


- For use with telecom grounding busbars
- Includes two tinned copper splice plates and 1/4" stainless steel fasteners


Material: Copper Finish: Tinned



| Part Number | For Use With | Height | Width | Thickness | Hole Size |
|----------------|--------------|--------|--------|-----------|-----------|
| TGBSPLICEKIT | TGB Series | 2" | 3" | 1/4" | 11/32" |
| TMGBSPLICEKIT | TMGB Series | 4" | 3 1/2" | 1/4" | 11/32" |

PERIMETER GROUNDING BUSBAR FOR CORNERS





FEATURED HIGHLIGHTS

• For use in installing perimeter grounding busbar system to fit within or around 90° corners






| Part Number | | | |
|----------------|--------|-------|-----------|
| Number | Length | Width | Thickness |
| EPGC1416X6 | 6" | 1" | 1/4" |
| EPGC1426X6 | 6" | 2" | 1/4" |
| EPGC1428X8 | 8" | 2" | 1/4" |
| EPGC1436X6 | 6" | 3" | 1/4" |

| Part Number | Length | Width | Thickness |
|----------------|--------|-------|-----------|
| EPGC1446X6 | 6" | 4" | 1/4" |
| EPGC1816X6 | 6" | 1" | 1/8" |
| EPGC1826X6 | 6" | 2" | 1/8" |
| EPGC1846X6 | 6" | 4" | 1/8" |
| Finish: Tinned | | | |
| EPGC1446X6T | 6" | 4" | 1/4" |

PERIMETER GROUNDING BUSBAR FOR DOORS

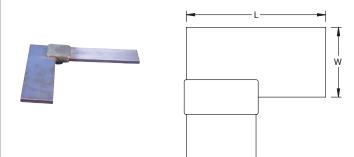

FEATURED HIGHLIGHTS

• For use in installing perimeter grounding busbar system to fit around doors




Material: Copper

| Part Number | Length | Width | Thickness | Certifications |
|----------------|--------|-------|-----------|----------------|
| EPGC1418X8FL | 8" | 1" | 1/4" | |
| EPGC1818X8FL | 8" | 1" | 1/8" | cULus |
| EPGC1828X8FL | 8" | 2" | 1/8" | cULus |
| EPGC1848X8FL | 8" | 4" | 1/8" | cULus |

PERIMETER GROUNDING BUSBAR FOR WALLS





FEATURED HIGHLIGHTS

- Perimeter grounding busbars are used to terminate ground wires and cables from equipment and other devices
- For busbars that include insulators and brackets, eight individual brackets and insulators are provided





| Part Number | Length | Width | Thickness | A | В | Hole Size |
|--------------------|--------------------|--------------------|-----------|-----|-----|-----------|
| Material: Copper – | - Busbar Configura | ntion: Busbar Only | | | | |
| EPGC141120 | 120" | 1" | 1/4" | 15" | 30" | 7/16" |
| EPGC142120 | 120" | 2" | 1/4" | 15" | 30" | 7/16" |
| EPGC142144 | 144" | 2" | 1/4" | 15" | 30" | 7/16" |
| EPGC143120 | 120" | 3" | 1/4" | 15" | 30" | 7/16" |
| EPGC144120 | 120" | 4" | 1/4" | 15" | 30" | 7/16" |
| EPGC182120 | 120" | 2" | 1/8" | 15" | 30" | 7/16" |

| Part Number | Length | Width | Thickness | A | В | Hole Size |
|-------------------|------------------|------------------------|-----------------------|---------------------|------------------------|-----------|
| EPGC183144 | 144" | 3" | 1/8" | 15" | 30" | 7/16" |
| EPGC184120 | 120" | 4" | 1/8" | 15" | 30" | 7/16" |
| Material: Copper, | Polyamide, Stair | nless Steel 304 (EN 1. | 4301) — Busbar Config | guration: Busbar, l | Insulators and Bracket | s |
| EPGA142120 | 120" | 2" | 1/4" | 15" | 30" | 7/16" |
| EPGA144120 | 120" | 4" | 1/4" | 15" | 30" | 7/16" |

GROUNDING BUSBAR MOUNTING KIT







FEATURED HIGHLIGHTS


• Includes hardware, fasteners, insulators and brackets

Material: Polyamide, Stainless Steel 304 (EN 1.4301) Finish: Bare

| Part Number | Busbar Width | Height | Length | Width |
|----------------|--------------|--------|---------|-------|
| B548A41 | 1" - 2" | 2 5/8" | 4 1/4" | 2" |
| B548A42 | 3" - 4" | 3 3/8" | 6 5/16" | 2" |

GROUNDING BUSBAR MOUNTING KIT WITH BEAM CLAMP







FEATURED HIGHLIGHTS


- Mounting kit for grounding busbars to steel beam
- Includes stainless steel hardware, fasteners, insulators and brackets


Material: Polyamide, Stainless Steel 304 (EN 1.4301)

| Part Number | Flange Thickness | Length | Width |
|----------------|------------------|--------|-------|
| B548A39 | 7/8" Max | 3 3/8" | 2" |

THEFT-DETERRENT GROUNDING BUSBAR, FLANGE MOUNT ASSEMBLY







FEATURED HIGHLIGHTS

- · Mounts to a typical structural beam flange on a telecom tower without cutting or drilling the flange
- · Accepts standard telecommunication grounding lugs (lugs not included)
- Includes 14 Standard Spacers (TDSGAS)

Material: Copper, Stainless Steel 18-8 (EN 1.4305), Nylon

Finish: Tinned


Spacer Thickness: 1/4"



| Part Number | Length 1 | Length 2 | Depth | Height | A | Flange Thickness | Thread Size 1 | Thread Size 2 | Thread Size 3 |
|----------------|----------|----------|-------|--------|----|---------------------|------------------|------------------|------------------|
| TDSGABC14 | 10 1/2" | 4" | 2.13" | 2.7" | 1" | 1/4" - 1" | 3/8 UNC | 5/16 UNC | 5/16 UNC |

THEFT-DETERRENT GROUNDING BUSBAR, POLE MOUNT ASSEMBLY





FEATURED HIGHLIGHTS

- · Mounts on a standard Schedule 40 ice bridge pole (3.5" or 88.9 mm nominal outer diameter) and provides a path to the buried ground ring via a connection to the post
- This assembly eliminates the need for a solid copper busbar and down lead
- The connection to the ground ring is concealed below
- Accepts standard telecommunication grounding lugs (lugs not included)
- Includes 14 Standard Spacers (TDSGAS) and 2 Pole Mount Spacers (TDSGAP)
- · Pole itself is not included in the assembly


Material: Copper, Stainless Steel 304 (EN 1.4301), Stainless Steel 18-8 (EN 1.4305) Finish: Tinned

Spacer Thickness: 1/4"



| Part Number | Length | A | Thread Size |
|----------------|---------|----|-------------|
| TDSGAPA14 | 10 1/2" | 1" | 3/8 UNC |

THEFT-DETERRENT GROUNDING BUSBAR, POST MOUNT ASSEMBLY

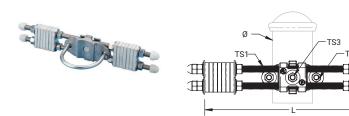

FEATURED HIGHLIGHTS

- · Mounts to a Schedule 40 pipe or post without cutting or drilling the pipe
- · Accepts standard telecommunication grounding lugs (lugs not included)
- Includes 14 Standard Spacers (TDSGAS)

Material: Copper, Stainless Steel 304 (EN 1.4301), Stainless Steel 18-8 (EN 1.4305)

Finish: Tinned


Spacer Thickness: 1/4"



| Part Number | Length | A | Fence Post Size, Nominal | Fence Post Outside Diameter, Actual | Thread Size 1 | Thread Size 2 | Thread Size 3 |
|----------------|---------|----|-----------------------------|--|---------------|---------------|---------------|
| TDSGAPC14 | 10 1/2" | 1" | 1 1/2" - 2" | 1.9" - 2.5" | 3/8 UNC | 5/16 UNC | 5/16 UNC |

THEFT-DETERRENT GROUNDING BUSBAR, WALL MOUNT ASSEMBLY





FEATURED HIGHLIGHTS

- · Utilizes a utility or telecom tower's or other mounting structure's connection to a ground ring to provide equipotential bonding and a low-impedance path to ground
- Can be used for any mounting application and in any configuration
- · Accepts standard telecommunication grounding lugs (lugs not included)
- Includes 17 Standard Spacers (TDSGAS)

Material: Copper, Aluminum, Stainless Steel 304 (EN 1.4301)

Finish: Tinned


Spacer Thickness: 1/4"



| Part Number | Length 1 | Length 2 | Width | Height | A | Hole Size | Thread Size |
|----------------|----------|----------|-------|--------|----|-----------|-------------|
| TDSGAWB17 | 9 1/4" | 1 1/2" | 2" | 2" | 1" | 0.39" | 3/8 UNC |

THEFT-DETERRENT GROUNDING BUSBAR, WALL MOUNTING BRACKET





FEATURED HIGHLIGHTS


• Replacement wall bracket for wall mount assembly

Material: Aluminum

| Part Number | Length | Width | Height | Hole Size | Slot Size | Unit Weight |
|----------------|--------|--------|--------|-----------|---------------|-------------|
| TDSGAWB | 2" | 1 1/2" | 2" | 0.39" | 0.64" x 0.39" | 0.14 lb |

SPACER FOR THEFT-DETERRENT GROUNDING BUSBAR





FEATURED HIGHLIGHTS


- Extra spacers available for additional conductor connections
- Additional standard spacers for use with all Theft-Deterrent Grounding Busbar assemblies
- Pole mount spacers are curved to fit next to the mounting pole

Material: Copper Finish: Tinned

| Part | | | | | | | | |
|--------|------------|--------|-------|------|------|-----------|-----------|---------------|
| Number | Туре | Length | Width | Α | В | Thickness | Hole Size | Slot Size |
| TDSGAP | Pole Mount | 1 3/4" | 1" | 3/8" | 7/8" | 1/4" | 0.39" | 0.64" x 0.39" |
| TDSGAS | Standard | 1 3/4" | 3/4" | 3/8" | 7/8" | 1/4" | 0.39" | 0.64" x 0.39" |

GROUNDING STANDOFF FOR TELECOM TOWERS





FEATURED HIGHLIGHTS

- Provides a direct, low-impedance electrical ground connection to the tower
- Offers a quick installation process
- Compact design fits in tight and confined locations
- Available in tinned copper to reduce dissimilar metal issues
- 6 TIA double-hole lug attachment points


Most equipment on a telecommunication tower is grounded by connecting a copper conductor to a ground bar mounted to the tower itself. The lead length of the conductor is often extensive, which can add resistance to the grounding system.

Material: Copper, Stainless Steel 301 (EN 1.4310) Finish: Tinned

| Part Number | Diameter | Height | Hole Size |
|----------------|----------|--------|-----------|
| ETMAGS | 5" Max | 3" | 3/8" |

EARTH BLOCK






FEATURED HIGHLIGHTS

- Used to connect multiple earthing cables to a single point which then connects to the earthing system
- Two holes available (countersink M5) for installation of the earth block

Material: Brass Finish: Tinned

| Part Number | Length | Width | Height | Hole Size 1 | Hole Size 2 | Hole Size 3 |
|----------------|--------|--------|--------|-------------|-------------|-------------|
| EBL08 | 3.465" | 0.787" | 0.512" | 0.157" | 0.204" | 0.256" |

INTERSYSTEM BONDING TERMINATION BAR

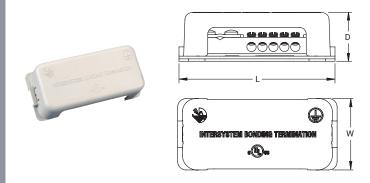

FEATURED HIGHLIGHTS

- Interconnects and terminates grounding conductors from telephone, CATV, radio and TV antennas
- Ideal for residential and small commercial applications
- Meets requirements of 2008 NEC® Article 250.94
- Accomodates five connectors for conductor sizes #14 Solid #6 Stranded $(1.5 - 25 \text{ mm}^2)$
- Accomodates one connector for conductor sizes #6 Solid #2 Stranded (16 – 35 mm²)
- Integral mounting base enables easy installation
- · Includes mounting hardware
- Connects to grounding electrode conductor does not rely on meter base enclosure bonding connection


The Intersystem Bonding Termination (IBTB), part of the nVent ERICO line of Facility Electrical Protection products, is designed to meet the requirements of the 2008 NEC® Article 250.94 "Bonding for Other Systems." The IBTB is mounted adjacent to the meter base or service entrance equipment and is a convenient way to interconnect and terminate grounding conductors from telephone, CATV or radio and television antennas. The IBTB includes corrosion-resistant, stainless steel mounting hardware and is easily accessible for connection and inspection. The lay-in connection clamp (#6- #2 AWG, or 16-35 mm²) allows easy installation of the grounding electrode conductor in one continuous length, where possible. The polymeric base and housing is impact-resistant, UV-stabilized and meets UL® requirements for weatherability performance.



| Part Number | Depth | Length | Width |
|----------------|-------|--------|-------|
| IBTB | 1.41" | 4.5" | 2.01" |

Grounding Tools

GROUND ROD DRIVER

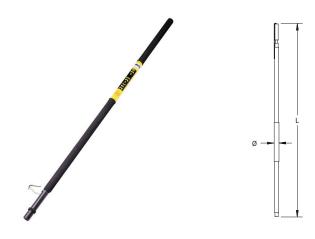

FEATURED HIGHLIGHTS

- Usable on all types of round ground rods: copper-bonded, galvanized, and stainless steel
- Inserts are interchangeable with standard ground rod driver body
- The driver will not deform the end of the rod, making connection of the ground conductor quick and easy

| Part Number | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Length | Unit Weight |
|----------------|---------------------------------|--------------------------------|--------|-------------|
| EGRD34 | 3/4" Max | 0.68" Max | 5′ | 23 lb |
| EGRD58 | 5/8" Max | 0.56" Max | 5' | 23 lb |

GROUND ROD DRIVER REPLACEMENT INSERT



FEATURED HIGHLIGHTS

- For use with the EGRD Ground Rod Driver
- Inserts are interchangeable with standard ground rod driver body

| Part | Ground Rod Diameter, | Ground Rod Diameter, | |
|---------|----------------------|----------------------|-------------|
| Number | Nominal | Actual | Unit Weight |
| EGRD34I | 3/4" | 0.68" Max | 6 lb |
| EGRD58I | 5/8" | 0.56" Max | 6 lb |

FEATURED HIGHLIGHTS




Material: Steel

Ground Rod Type: Copper-bonded, Galvanized

| Part Ground Rod Diameter, Number Nominal | | | | |
|--|---------|------------|------------|--------|
| Number | Nominal | Diameter 1 | Diameter 2 | Length |
| DH34 | 3/4" | 0.78" | 0.85" | 7" |
| DH58 | 5/8" | 0.58" | 0.85" | 7" |

GROUND ROD DRIVING HEAD FOR ROTARY HAMMER





FEATURED HIGHLIGHTS

• Ground rod driving head for use with a rotary hammer


Material: Steel

Ground Rod Type: Copper-bonded, Galvanized

| Part Number | Ground Rod Diameter, Nominal | Diameter 1 | Diameter 2 | Diameter 3 | Length | |
|----------------|---------------------------------|------------|------------|------------|--------|--|
| B13716RH15 | 5/8" | 0.58" | 0.74" | 0.64" | 7.7" | |

GROUND ROD DRIVING STUD FOR ROTARY HAMMER WITH COUPLER





FEATURED HIGHLIGHTS

- Used in conjunction with a CC58 ground rod coupler to drive a pointed ground rod
- DSCC58 driving stud fits inside CC58 coupler, then the assembly is placed on top of the ground rod
- Hammering is then carried out on the DSCC58

Material: Steel Ground Rod Type: Copper-bonded

| Part Number | Ground Rod Diameter, Nominal | Diameter 1 | Diameter 2 | Length | |
|----------------|------------------------------|------------|------------|--------|--|
| DSCC58 | 5/8" | 0.78" | 0.52" | 2" | |

GROUND ROD DRIVE SLEEVE FOR POINTED GROUND RODS





FEATURED HIGHLIGHTS


- For use with unthreaded ground rods
- Slides on top of ground rod to prevent mushrooming while driving into ground

Material: Steel Ground Rod Type: Copper-bonded, Galvanized

| Part Number | Ground Rod Diameter, Nominal | Diameter | Length |
|----------------|------------------------------|----------|--------|
| 158380 | 5/8" | 0.63" | 2.6" |
| B13714 | 1/2" | 0.52" | 6.0" |
| B13716 | 5/8" | 0.58" | 6.0" |
| B13718 | 3/4" | 0.70" | 6.0" |
| B13722 | 1" | 0.94" | 6.0" |
| B13731 | 5/8" | 0.64" | 6.0" |
| B13733 | 3/4" | 0.77" | 6.0" |
| B13737 | 1" | 1.02" | 6.0" |
| DH12M | 1/2" | 0.53" | 3.9" |
| DH34M | 3/4" | 0.79" | 3.9" |
| DH58M | 5/8" | 0.63" | 3.9" |
| EDS12 | 1/2" | 0.53" | 2.5" |
| EDS58 | 5/8" | 0.58" | 2.5" |

GROUND ROD DRIVING STUD FOR SECTIONAL GROUND RODS





FEATURED HIGHLIGHTS

• Used in conjuction with threaded couplers while driving sectional ground rods

Material: Steel

| Part | | | |
|--------|------------------------------|-------------|--------|
| Number | Ground Rod Diameter, Nominal | Thread Size | Length |
| 158100 | 5/8" | 5/8 UNC | 1.25" |
| 158110 | 3/4" | 3/4 UNC | 1.50" |
| 710090 | 3/8" | M10 | 0.71" |
| 710100 | 3/8" | M10 | 0.83" |
| DS1 | 1" | 1 UNC | 2.50" |
| DS12 | 1/2" | 1/2 UNC | 1.50" |
| DS12S | 1/2" | 9/16 UNC | 1.75" |
| DS34 | 3/4" | 3/4 UNC | 2.00" |
| DS58 | 5/8" | 5/8 UNC | 1.75" |
| DS58C | 5/8" | 5/8 UNC | 1.44" |

GROUND ROD DRIVING POINT FOR SECTIONAL GROUND RODS





FEATURED HIGHLIGHTS

• Threaded ground rod driving tip to assist in driving sectional ground rods into the earth

Material: Steel

| Part Number | Ground Rod Diameter, Nominal | Thread Size | Length |
|----------------|------------------------------|-------------|--------|
| SDT34 | 3/4" | 3/4 UNC | 1.7" |
| SDT58 | 5/8" | 5/8 UNC | 1.7" |

2- AND 3-POINT GROUND RESISTANCE TESTER KIT



FEATURED HIGHLIGHTS

- Measures ground resistance (2- and 3-Point) Fall-of-Potential method
- Provides high-breaking fuse protection capacity, 0.1A, >250V
- Auto-ranging: automatically selects the optimum range
- · Color-coded terminals and lead identification
- Extremely simple to operate: connect press hold read
- Designed to reject high levels of noise and interference
- · Large LCD digital display
- · Rugged dustproof and rainproof field case
- Battery-powered, with low battery indication
- Includes eight 1.5V AA batteries to power approximately 1800 15-second measurements



| Part Number | EST3640 |
|-----------------------|--|
| Soil Resistivity Test | No |
| Measurement Range | 0 – 2,000 Ω |
| Resolution | 10 mΩ – 1 Ω |
| Test Current | 10.0 – 0.1 mA |
| Open Voltage | 42 V Max |
| Operating Frequency | 128 Hz square wave |
| Accuracy | 3% of Reading +/- 3ct 5% of Reading +/- 3ct |
| Unit Weight | 35 lb |

Kit includes: Two 300' (91.4 m) color-coded leads on spools (red and blue), two 5' (1.5 m) color-coded leads (red and blue), two 100' (30.5 m) color-coded leads (green and black), four 14.5" (368 mm) T-shaped auxiliary ground electrodes, one set of five-spaded lugs, one 100' (30.5 m) tape measure, and one carrying bag.



FEATURED HIGHLIGHTS

- Measures ground resistance (2- and 3-Point) Fall-of-Potential method and soil resistivity (4-Point)
- Fuse protection of 0.1A, >250V, 0.25 x 1.25" with 30kA Interrupt Capacity
- Both models will perform over 2,000 measurements of the 15-second tests between recharging or battery replacement
- Provides a response time of approximately four to eight seconds for a stabilized measurement
- Step voltage tests and touch potential measurements
- Auto-ranging: automatically selects the optimum resistance range and test current
- Designed to reject high levels of noise and interference
- Extremely simple to operate: connect press hold read
- May also be used for continuity tests on bonding
- · Large easy-to-read backlit display
- LED on faceplate informs operator of high input noise, high auxiliary rod resistance and fault connections
- · Rugged dustproof and rainproof field case
- · Color-coded terminals
- · Low battery indication



| Part Number | Soil Resistivity Test | Measurement Range | Resolution | Open Voltage | Test Current | Operating Frequency | Accuracy | Auxillary Electrode Influence | Withstanding Voltage | Unit Weight |
|----------------|-----------------------------|----------------------|-------------|-----------------|-----------------|------------------------|--|-------------------------------------|-------------------------|----------------|
| EST4620 | Yes | 0 – 2,000 Ω | 10 mΩ – 1 Ω | 42 V Max | 10.0 – 0.1 mA | 128 Hz square wave | 2% of Reading +/- 1ct, 5% of Reading +/- 3ct | 3 – 50 kΩ | 250 VAC, 100 VDC | 35 lb |
| EST4630 | Yes | 0 – 2,000 Ω | 10 mΩ – 1 Ω | 42 V Max | 10.0 – 0.1 mA | 128 Hz square wave | 2% of Reading +/- 1ct, 5% of Reading +/- 3ct | 3 – 50 kΩ | 250 VAC, 100 VDC | 35 lb |

Kit includes: Two 300' (91.4 m) color-coded leads on spools (red and blue), two 5' (1.5 m) color-coded leads (red and blue), two 100' (30.5 m) color-coded leads (green and black), four 14.5" (368 mm) T-shaped auxiliary ground electrodes, one set of five-spaded lugs, one 100' (30.5 m) tape measure, and one carrying bag.

2-, 3- AND 4-POINT GROUND RESISTANCE TESTER KIT WITH DATAVIEW® SOFTWARE



FEATURED HIGHLIGHTS

- Measures Ground Impedance at frequencies up to 5kHz to test lightning strike protection
- · Ground Resistance testing using the 2 clamp method (no auxiliary rods needed) using optional current probes
- Includes DataView® software for data storage, real-time display, analysis, report generation and system configuration
- 3-Point Fall-of-Potential measurement with manual or automatic frequency selection
- · Used under difficult conditions such as the presence of high-stray currents that normally affect accuracy
- Automatic report generation including the fall of potential plot
- 4-Point soil resistivity measurement with automatic calculation of Rho and user selection of Wenner or Schlumberger test method
- 3-Point earth coupling measurement
- Manual and automatic frequency scan from 41 to 5,078Hz for optimum test accuracy in electrically-noisy environments
- Selectable test voltage of 16 or 32V up to 250mA of test current
- 2- and 4-Wire Bond Resistance/Continuity Measurement (DC Resistance) with automatic polarity reversal
- Stores up to 512 complete test results in internal memory
- · Optically isolated USB communication included
- Display with automatic backlight when entering a function
- Rugged dustproof and rainproof field case IP53 rated in closed position
- · AC-powered with rechargeable NiMH batteries from wall charger or vehicle power
- · Auto-off power management



Part Number

EST6472

Kit includes: Two 300' (91.4 m) color-coded leads on spools (red and blue), two 5' (1.5 m) color-coded leads (red and blue), two 100' (30.5 m) color-coded leads (green and black), four 14.5" (368 mm) T-shaped auxiliary ground electrodes, one set of five-spaded lugs, one 100' (30.5 m) tape measure, and one carrying bag. Ground Resistance Tester Clamp-On Probe is not included and must be ordered separately.

| Ground Resistance Tester Information | |
|--------------------------------------|---|
| 3-Point Measurement | |
| Range (Auto-Ranging) | 0.09Ω to 99.9kΩ |
| Resolution | 0.01Ω to 100Ω |
| Test Voltage | Nominal 16 or 32Vrms user selectable |
| Operating Frequency | 41 to 5078Hz automatic or user selectable |
| Test Current | Up to 250mA |
| Accuracy | ±2% of Reading + 1ct @ 128Hz |
| 2-Clamp Measurement | |
| Range | 0.1 to 500Ω |
| Resolution | 0.01 to 1Ω |

| Operating Frequency | Auto: 1367Hz; Manual: 128Hz-1367Hz-1611Hz-1758Hz |
|---------------------------------------|--|
| Soil Resistivity 4-Point Measurement | |
| Test Method | Wenner or Schlumberger selectable with automatic calculation of test results in $\Omega\text{-meters}$ |
| Range (Auto-Ranging) | 0.01 to 99.99kΩ; ρ max: 999kΩm |
| Resolution | 0.01 to 100Ω |
| Test Voltage | 16 or 32V user selectable |
| Operating Frequency | From 41 to 128Hz selectable |
| External Voltage Measurement | |
| Range (Auto-Ranging) | 0.1 to 65.0VAC/DC - DC to 440Hz |
| Accuracy | ±2% of Reading + 1ct |
| Resistance Measurement (Bond Testing) | |
| Measurement Type | 2-Pole (with lead resistance compensation) or 4-Pole (Kelvin sensing) user selectable |
| Range (Auto-Ranging) | 2-Pole 0.02Ω to $99.99k\Omega$; 4-Pole 0.02Ω to $99.99k\Omega$ |
| Accuracy | ±2% of Reading + 2cts |
| Test Voltage | 16VDC (+, - or auto polarity) |
| Test Current | Up to 250mA max |
| Data Storage | |
| Memory Capacity | 512 test results (64KB) |
| Power | |
| Power Source | 9.6V rechargeable battery pack (included) |
| Recharging Source | 110/220 50/60Hz external charger with 18Vdc, 1.9A output |

Kit includes: Two 300' (91.4 m) color-coded leads on spools (red and blue), two 5' (1.5 m) color-coded leads (red and blue), two 100' (30.5 m) color-coded leads (green and black), four 14.5" (368 mm) T-shaped auxiliary ground electrodes, one set of five-spaded lugs, one 100' (30.5 m) tape measure, and one carrying bag.

Ground Resistance Tester Clamp-On Probe is not included and must be ordered separately.

nVent, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

HANDHELD CLAMP-ON GROUND RESISTANCE TESTER



FEATURED HIGHLIGHTS

- Measures earth resistance without need to disconnect from the electrical system or need for auxillary ground electrodes or reels
- Ground Resistance is auto-ranging from 1 to 199Ω
- Current Measurement is auto-ranging from 1mA to 40A
- Ground voltage indication warns of unsafe conditions
- Clamping diameter of 1.4" (35 mm) with large jaw design
- Stores up to 300 measurements
- Includes a hard carrying case, calibration loop, four 1.5V AA batteries and a user manual

| Part | Ground Resistance Measurement Range | Ground Resistance Resolution | Ground Resistance Accuracy | Current Measurement Range | Current Measurement Resolution | | | | Loop Impedance Measurement |
|--------|---|------------------------------------|----------------------------------|---------------------------------|--------------------------------------|--------|-------------|----------|----------------------------------|
| EST401 | 0.01 – 1,500.00 Ω | 0.001 – 50.000 Ω | Approx. 1.5% - 25% | 0.20 mA - 39.99 A | 1 μA – 10 mA | +/- 2% | 47 – 800 Hz | 2,083 Hz | 10 to 100μH; 100 to 500μH |

GROUND RESISTANCE TESTER CLAMP-ON PROBE



FEATURED HIGHLIGHTS

- AC Clamp-on probe for use with EST6472
- Extends use of EST6472 to be used as a clamp-on ground resistance tester

 ϵ



FEATURED HIGHLIGHTS

- Includes two reels of silicone rubber insulated wire—one reel is red and the other reel is blue—for easy stake identification
- The far end of test lead remains attached to the reel base, which eliminates tangling and speeds up the process of test stake deployment
- Each reel includes 500 feet (152.4 m) of cable, a screwdriver and a lead that connects the reel to the test meter

| Part Number | Cable Length | Unit Weight |
|----------------|--------------|-------------|
| ESTREELKIT500 | 500' | 17 lb |

nVent ERICO Cadweld Molds

GROUNDING CONNECTION SPECIFICATION


This specification covers the nVent ERICO Cadweld exothermic welding system for use in making electrical connections. The Cadweld system supplied under this specification shall include welding material, molds, tools and accessories as required.

Unless otherwise specified, Cadweld exothermic welding system shall be used for all electrical grounding connections of copper to copper and copper to steel conductors. Cadweld connections shall be suitable for exposure to the elements of direct burial in earth or concrete without degradation over the lifetime of the grounding system.


The Cadweld exothermic welding system furnished under this specification shall meet the applicable requirements of IEEE Standard 80 "IEEE Guide for Safety in AC Substation Grounding" and IEEE Standard 837 IEEE "Standard for Qualifying Permanent Connections Used in Substation Grounding". Independent test data showing conformance to IEEE Std. 837 shall be readily available.


The Cadweld Mold Numbering System

The Cadweld mold part number gives, in code, the complete information about the mold. Type of connection, mold price key, and conductor size(s)

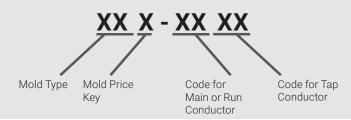


Examples:









CONNECTIONS USED FOR GROUNDING REINFORCING BARS

Cadweld provides efficient and permanent connections for both grounding and attaching lightning protection conductors to rebar. When making Cadweld connections to rebar, the normal materials required are: mold, handle and weld metal. In addition, packing material is also required. These materials act as a seal between the mold and rebar to prevent leaks. One unit of packing material must be ordered for each weld.

CONNECTIONS TO STRUCTURAL REINFORCING BAR AND ANCHOR BOLTS

Welding of ground conductors to reinforcing bars (rebar) by the Cadweld process should not be harmful if stresses in the rebar are below yield. As design stresses are normally only about 50% to 60% of the nominal yield strength of the rebar, welding by the Cadweld process should not be detrimental under design stresses.

As the ACI Building Code (ACI318-14 Commentary, 25.5.2.1) advises, "splice requirements encourage splicing bars at points of minimum stress ... encourage the location of splices away from regions of high tensile stress." The same advice should apply to locations of Cadweld connections of a ground conductor to rebar. Where possible, locate the weld area away from areas of maximum tensile stress, e.g., near the free end of the bar in a lap splice, on the hook extension for a hooked bar, etc. The same considerations apply to Cadweld connections to anchor bolts.

NOTE:


For lightning protection applications where the main lightning protection conductor is connected to the rebar, nVent ERICO recommends a 2/0 AWG copper conductor for structures over 75 feet in height and a #2 AWG copper conductor for structures under 75 feet. For a bonding conductor, a #6 AWG copper may be used. These sizes meet NFPA78 Code requirement. Anchor bolts are connected in the same way.

All welds to rebar requiring larger than a #150 weld metal will be sold only after review by nVent ERICO.

CABLE TO CABLE




SS MOLDS




- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- ${\boldsymbol{\cdot}}$ Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- · Connections are visually inspected





| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|-----------|-----------------------|-----------------------|-----------------------|-------------|--|
| SSC1D | SS | С | #8 Solid | #8 Solid | 25 or 25PLUSF20 | Preferred | L160 |
| SSC1G | SS | С | #6 Solid | #6 Solid | 25 or 25PLUSF20 | Preferred | L160 |
| SSC1H | SS | С | #6 Concentric | #6 Concentric | 25 or 25PLUSF20 | Preferred | L160 |
| SSC1K | SS | С | #4 Solid | #4 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| SSC1L | SS | С | #4 Concentric | #4 Concentric | 25 or 25PLUSF20 | Preferred | L160 |
| SSC1T | SS | С | #2 Solid | #2 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| SSC1V | SS | С | #2 Concentric | #2 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| SSC1Y | SS | С | #1 Concentric | #1 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| SSC2C | SS | С | 1/0 Concentric | 1/0 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| SSC2G | SS | С | 2/0 Concentric | 2/0 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| SSC2Q | SS | С | 4/0 Concentric | 4/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| SSC2V | SS | С | 250 kcmil Concentric | 250 kcmil Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| SSC3A | SS | С | 300 kcmil Concentric | 300 kcmil Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| SSC3D | SS | С | 350 kcmil Concentric | 350 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| SSC3H | SS | С | 400 kcmil Concentric | 400 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| SSC3Q | SS | С | 500 kcmil Concentric | 500 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| SSC4L | SS | С | 750 kcmil Concentric | 750 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| SSD4Y | SS | D | 1000 kcmil Concentric | 1000 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| SST1G | SS | Т | #6 Solid | #6 Solid | 25 or 25PLUSF20 | Preferred | Clamp Included |
| SST1K | SS | Т | #4 Solid | #4 Solid | 25 or 25PLUSF20 | Preferred | Clamp Included |
| SST1L | SS | Т | #4 Concentric | #4 Concentric | 25 or 25PLUSF20 | Preferred | Clamp Included |
| SST1T | SS | Т | #2 Solid | #2 Solid | 32 or 32PLUSF20 | Preferred | Clamp Included |
| SST1V | SS | Т | #2 Concentric | #2 Concentric | 32 or 32PLUSF20 | Preferred | Clamp Included |






| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|-----------|----------------|----------------|-------------------|-------------|--|
| PCC1G1G | PC | С | #6 Solid | #6 Solid | 25 or 25PLUSF20 | Preferred | L160 |
| PCC1G1H | PC | С | #6 Solid | #6 Concentric | 25 or 25PLUSF20 | Preferred | L160 |
| PCC1H1H | PC | С | #6 Concentric | #6 Concentric | 25 or 25PLUSF20 | Preferred | L160 |
| PCC1K1G | PC | С | #4 Solid | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1K1K | PC | С | #4 Solid | #4 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1L1G | PC | С | #4 Concentric | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1L1H | PC | С | #4 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1L1L | PC | С | #4 Concentric | #4 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1T1G | PC | С | #2 Solid | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1T1H | PC | С | #2 Solid | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1T1T | PC | С | #2 Solid | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PCC1T1V | PC | С | #2 Solid | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC1V1G | PC | С | #2 Concentric | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1V1H | PC | С | #2 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PCC1V1L | PC | С | #2 Concentric | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| PCC1V1T | PC | С | #2 Concentric | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PCC1V1V | PC | С | #2 Concentric | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC1Y1G | PC | С | #1 Concentric | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| PCC1Y1H | PC | С | #1 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| PCC1Y1V | PC | С | #1 Concentric | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC1Y1Y | PC | С | #1 Concentric | #1 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2C1G | PC | С | 1/0 Concentric | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| PCC2C1H | PC | С | 1/0 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| PCC2C1K | PC | С | 1/0 Concentric | #4 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2C1L | PC | С | 1/0 Concentric | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2C1T | PC | С | 1/0 Concentric | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2C1V | PC | С | 1/0 Concentric | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2C2C | PC | С | 1/0 Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2G1G | PC | С | 2/0 Concentric | #6 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2G1H | PC | С | 2/0 Concentric | #6 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2G1L | PC | С | 2/0 Concentric | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PCC2G1T | PC | С | 2/0 Concentric | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2G1V | PC | С | 2/0 Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2G1Y | PC | С | 2/0 Concentric | #1 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PCC2G2G | PC | С | 2/0 Concentric | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PCC2Q1G | PC | С | 4/0 Concentric | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2Q1H | PC | С | 4/0 Concentric | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2Q1K | PC | С | 4/0 Concentric | #4 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2Q1L | PC | С | 4/0 Concentric | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PCC2Q1T | PC | С | 4/0 Concentric | #2 Solid | 115 or 115PLUSF20 | Preferred | L160 |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|-----------|----------------------|-------------------------|--------------------------|-------------|--|
| PCC2Q1V | PC | С | 4/0 Concentric | #2 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PCC2Q1Y | PC | С | 4/0 Concentric | #1 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PCC2Q2C | PC | С | 4/0 Concentric | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PCC2Q2G | PC | С | 4/0 Concentric | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PCC2Q2Q | PC | С | 4/0 Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PCC2V2G | PC | С | 250 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PCC2V2Q | PC | С | 250 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PCC2V2V | PC | С | 250 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PCC3Q2Q | PC | С | 500 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PCC3Q3Q | PC | С | 500 kcmil Concentric | 500 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| PCD4L4L | PC | D | 750 kcmil Concentric | 750 kcmil Concentric | 200 x 3 or 600PLUSF20 | Preferred | L159 |
| PCT1H1H | PC | Т | #6 Concentric | #6 Concentric | 25 or 25PLUSF20 | Preferred | Clamp Included |
| PCT1L1D | PC | Т | #4 Concentric | #8 Solid | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1L1G | PC | Т | #4 Concentric | #6 Solid | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1L1H | PC | Т | #4 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1T1G | PC | Т | #2 Solid | #6 Solid | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1T1H | PC | Т | #2 Solid | #6 Concentric | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1V1D | PC | Т | #2 Concentric | #8 Solid | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1V1G | PC | Т | #2 Concentric | #6 Solid | 32 or 32PLUSF20 | Preferred | Clamp Included |
| PCT1V1H | PC | Т | #2 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | Clamp Included |

TA MOLDS






| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|---------------|---------------|------------------|-------------|--|
| TAC1D1D | TA | С | #8 Solid | #8 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1G1G | TA | С | #6 Solid | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1G1H | TA | С | #6 Solid | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1H1H | TA | С | #6 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1K1K | TA | С | #4 Solid | #4 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1K1L | TA | С | #4 Solid | #4 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1L1H | TA | С | #4 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1L1L | TA | С | #4 Concentric | #4 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| TAC1T1G | TA | С | #2 Solid | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1T1H | TA | С | #2 Solid | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1T1K | TA | С | #2 Solid | #4 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1T1L | TA | С | #2 Solid | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| | | | | | | | |

| Global Part | Mold | Price | | | | | Handle Clamp (Sold separately |
|-------------|--------|-------|----------------------|----------------------|-------------------|-------------|-------------------------------------|
| Number | Family | Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | unless noted) |
| TAC1T1T | TA | С | #2 Solid | #2 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1T1V | TA | С | #2 Solid | #2 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1G | TA | С | #2 Concentric | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1H | TA | С | #2 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1K | TA | С | #2 Concentric | #4 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1L | TA | С | #2 Concentric | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1T | TA | С | #2 Concentric | #2 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1V | TA | С | #2 Concentric | #2 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1V1Y | TA | С | #2 Concentric | #1 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1Y1L | TA | С | #1 Concentric | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC1Y1T | TA | С | #1 Concentric | #2 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1G | TA | С | 1/0 Concentric | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1H | TA | С | 1/0 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1K | TA | С | 1/0 Concentric | #4 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1L | TA | С | 1/0 Concentric | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1T | TA | С | 1/0 Concentric | #2 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1V | TA | С | 1/0 Concentric | #2 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C1Y | TA | С | 1/0 Concentric | #1 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2C2C | TA | С | 1/0 Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2G1G | TA | С | 2/0 Concentric | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G1H | TA | С | 2/0 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G1K | TA | С | 2/0 Concentric | #4 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G1L | TA | С | 2/0 Concentric | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G1T | TA | С | 2/0 Concentric | #2 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G1V | TA | С | 2/0 Concentric | #2 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G1Y | TA | С | 2/0 Concentric | #1 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| TAC2G2C | TA | С | 2/0 Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2G2G | TA | С | 2/0 Concentric | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1G | TA | С | 4/0 Concentric | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1H | TA | С | 4/0 Concentric | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1K | TA | С | 4/0 Concentric | #4 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1L | TA | С | 4/0 Concentric | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1T | TA | С | 4/0 Concentric | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1V | TA | С | 4/0 Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q1Y | TA | С | 4/0 Concentric | #1 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q2C | TA | С | 4/0 Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q2G | TA | С | 4/0 Concentric | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2Q2Q | TA | С | 4/0 Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC2V1T | TA | С | 250 kcmil Concentric | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2V1V | TA | С | 250 kcmil Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2V1Y | TA | С | 250 kcmil Concentric | #1 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2V2C | TA | С | 250 kcmil Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2V2G | TA | С | 250 kcmil Concentric | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC2V2Q | TA | С | 250 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC2V2V | TA | С | 250 kcmil Concentric | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC3A1T | TA | С | 300 kcmil Concentric | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3A1V | TA | С | 300 kcmil Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3A2C | TA | С | 300 kcmil Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3A2G | TA | С | 300 kcmil Concentric | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3A2Q | TA | С | 300 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC3A2V | TA | С | 300 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3A3A | TA | С | 300 kcmil Concentric | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3D1V | TA | С | 350 kcmil Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3D1Y | TA | С | 350 kcmil Concentric | #1 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3D2C | TA | С | 350 kcmil Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3D2G | TA | С | 350 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC3D2Q | TA | С | 350 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC3D2V | TA | С | 350 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|-----------------------|-----------------------|-----------------------|-------------|--|
| TAC3D3A | TA | С | 350 kcmil Concentric | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3D3D | TA | С | 350 kcmil Concentric | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3H2C | TA | С | 400 kcmil Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3H2G | TA | С | 400 kcmil Concentric | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3H2Q | TA | С | 400 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC3H2V | TA | С | 400 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3H3A | TA | С | 400 kcmil Concentric | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3H3D | TA | С | 400 kcmil Concentric | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3H3H | TA | С | 400 kcmil Concentric | 400 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| TAC3Q2C | TA | С | 500 kcmil Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3Q2G | TA | С | 500 kcmil Concentric | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| TAC3Q2Q | TA | С | 500 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC3Q2V | TA | С | 500 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3Q3A | TA | С | 500 kcmil Concentric | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3Q3D | TA | С | 500 kcmil Concentric | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC3Q3Q | TA | С | 500 kcmil Concentric | 500 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| TAC4L2G | TA | С | 750 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC4L2Q | TA | С | 750 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC4L2V | TA | С | 750 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| TAC4L3D | TA | С | 750 kcmil Concentric | 350 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| TAC4Y2G | TA | С | 1000 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC4Y2Q | TA | С | 1000 kcmil Concentric | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| TAC4Y3D | TA | С | 1000 kcmil Concentric | 350 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| TAD3Q4L | TA | D | 500 kcmil Concentric | 750 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| TAD3X3X | TA | D | 600 kcmil Concentric | 600 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| TAD4L3H | TA | D | 750 kcmil Concentric | 400 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| TAD4L3Q | TA | D | 750 kcmil Concentric | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| TAD4L4L | TA | D | 750 kcmil Concentric | 750 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 |
| TAD4Y2V | TA | D | 1000 kcmil Concentric | 250 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| TAD4Y3Q | TA | D | 1000 kcmil Concentric | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| TAD4Y4L | TA | D | 1000 kcmil Concentric | 750 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 |
| TAD4Y4Y | TA | D | 1000 kcmil Concentric | 1000 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 |

XA MOLDS






| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|---------------|---------------|------------------|-------------|--|
| XAC1G1G | XA | С | #6 Solid | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| XAC1H1H | XA | С | #6 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| XAC1K1K | XA | С | #4 Solid | #4 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| XAC1L1L | XA | С | #4 Concentric | #4 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| XAC1T1T | XA | С | #2 Solid | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| XAC1V1H | XA | С | #2 Concentric | #6 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| XAC1V1L | XA | С | #2 Concentric | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| XAC1V1T | XA | С | #2 Concentric | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|-----------------------|----------------------|-----------------------|-------------|--|
| XAC1V1V | XA | С | #2 Concentric | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| XAC1Y1Y | XA | С | #1 Concentric | #1 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| XAC2C1V | XA | С | 1/0 Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| XAC2C2C | XA | С | 1/0 Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| XAC2G1T | XA | С | 2/0 Concentric | #2 Solid | 115 or 115PLUSF20 | Preferred | L160 |
| XAC2G1V | XA | С | 2/0 Concentric | #2 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| XAC2G2C | XA | С | 2/0 Concentric | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| XAC2G2G | XA | С | 2/0 Concentric | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| XAC2Q1V | XA | С | 4/0 Concentric | #2 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| XAC2Q1Y | XA | С | 4/0 Concentric | #1 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| XAC2Q2C | XA | С | 4/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| XAC2Q2G | XA | С | 4/0 Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| XAC2Q2Q | XA | С | 4/0 Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC2V1V | XA | С | 250 kcmil Concentric | #2 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| XAC2V2C | XA | С | 250 kcmil Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| XAC2V2G | XA | С | 250 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| XAC2V2Q | XA | С | 250 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC2V2V | XA | С | 250 kcmil Concentric | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC3A2G | XA | С | 300 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| XAC3A2Q | XA | С | 300 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC3A2V | XA | С | 300 kcmil Concentric | 250 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| XAC3A3A | XA | С | 300 kcmil Concentric | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC3D2C | XA | С | 350 kcmil Concentric | 1/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC3D2G | XA | С | 350 kcmil Concentric | 2/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC3D2Q | XA | С | 350 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| XAC3D2V | XA | С | 350 kcmil Concentric | 250 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| XAC3D3D | XA | С | 350 kcmil Concentric | 350 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| XAC3H3H | XA | С | 400 kcmil Concentric | 400 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| XAC3Q2G | XA | С | 500 kcmil Concentric | 2/0 Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| XAC3Q2Q | XA | С | 500 kcmil Concentric | 4/0 Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| XAD3Q3Q | XA | D | 500 kcmil Concentric | 500 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 |
| XAD3X3X | XA | D | 600 kcmil Concentric | 600 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 |
| XAD4L2Q | XA | D | 750 kcmil Concentric | 4/0 Concentric | 500 or 500PLUSF20 | Preferred | L159 |
| XAD4Y2Q | XA | D | 1000 kcmil Concentric | 4/0 Concentric | 500 or 500PLUSF20 | Preferred | L159 |

XB MOLDS






| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|-----------------------|-----------------------|------------------------|----------------|---|
| XB32C2C | XB | 3 | 1/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Easy | L163 |
| XB32G2G | XB | 3 | 2/0 Concentric | 2/0 Concentric | 200 or 200PLUSF20 | Easy | L163 |
| XB32L2L | XB | 3 | 3/0 Concentric | 3/0 Concentric | 250 or 250PLUSF20 | Easy | L163 |
| XB32Q2Q | XB | 3 | 4/0 Concentric | 4/0 Concentric | 250 or 250PLUSF20 | Easy | L163 |
| XB32V2V | XB | 3 | 250 kcmil Concentric | 250 kcmil Concentric | 150 x 2 or 300PLUSF20 | Easy | L163 |
| XB43D3D | XB | 4 | 350 kcmil Concentric | 350 kcmil Concentric | 500 or 500PLUSF20 | Easy | L164 |
| XBC1K1K | XB | С | #4 Solid | #4 Solid | 65 or 65PLUSF20 | Easy | L160 |
| XBC1L1L | XB | С | #4 Concentric | #4 Concentric | 65 or 65PLUSF20 | Easy | L160 |
| XBC1T1T | XB | С | #2 Solid | #2 Solid | 90 or 90PLUSF20 | Easy | L160 |
| XBC1V1L | XB | С | #2 Concentric | #4 Concentric | 65 or 65PLUSF20 | Easy | L160 |
| XBC1V1V | XB | С | #2 Concentric | #2 Concentric | 90 or 90PLUSF20 | Easy | L160 |
| XBC1Y1Y | XB | С | #1 Concentric | #1 Concentric | 115 or 115PLUSF20 | Easy | L160 |
| XBC2C1V | XB | С | 1/0 Concentric | #2 Concentric | 115 or 115PLUSF20 | Easy | L160 |
| XBK3X3X | XB | K | 600 kcmil Concentric | 600 kcmil Concentric | 500 x 2 or 1000PLUSF20 | Easy | Includes Frame w/ Handles |
| XBK4L3Q | XB | K | 750 kcmil Concentric | 500 kcmil Concentric | 500 x 2 or 1000PLUSF20 | Easy | Includes Frame w/ Handles |
| XBK4L4L | XB | K | 750 kcmil Concentric | 750 kcmil Concentric | 250 x 5 or 1250PLUSF20 | Easy | Includes Frame w/ Handles |
| XBK4Y3Q | XB | K | 1000 kcmil Concentric | 500 kcmil Concentric | 500 x 2 or 1000PLUSF20 | Easy | Includes Frame w/ Handles |
| XBK4Y4Y | XB | K | 1000 kcmil Concentric | 1000 kcmil Concentric | 500 x 3 or 1500PLUSF20 | Easy | Includes Frame w/ Handles |
| XBM2C2C | XB | М | 1/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Easy | Includes Frame w/ Handles |
| XBM2G2G | XB | М | 2/0 Concentric | 2/0 Concentric | 200 or 200PLUSF20 | Easy | Includes Frame w/ Handles |
| XBM2L2L | XB | М | 3/0 Concentric | 3/0 Concentric | 250 or 250PLUSF20 | Easy | Includes Frame w/ Handles |
| XBM2Q2Q | XB | М | 4/0 Concentric | 4/0 Concentric | 250 or 250PLUSF20 | Easy | Includes Frame w/ Handles |
| XBM2V2V | XB | М | 250 kcmil Concentric | 250 kcmil Concentric | 150 x 2 or 300PLUSF20 | Easy | Includes Frame w/ Handles |
| XBP1G1G | XB | Р | #6 Solid | #6 Solid | 32 or 32PLUSF20 | Easy | Clamp Included |
| XBP1H1H | XB | Р | #6 Concentric | #6 Concentric | 45 or 45PLUSF20 | Easy | Clamp Included |
| XBQ2C2C | XB | Q | 1/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Easy | L160 |
| XBQ2G1V | XB | Q | 2/0 Concentric | #2 Concentric | 150 or 150PLUSF20 | Easy | L160 |
| XBQ2G2C | XB | Q | 2/0 Concentric | 1/0 Concentric | 200 or 200PLUSF20 | Easy | L160 |
| XBQ2G2G | XB | Q | 2/0 Concentric | 2/0 Concentric | 200 or 200PLUSF20 | Easy | L160 |
| XBQ2Q2C | XB | Q | 4/0 Concentric | 1/0 Concentric | 200 or 200PLUSF20 | Easy | L160 |
| XBQ2Q2G | XB | Q | 4/0 Concentric | 2/0 Concentric | 200 or 200PLUSF20 | Easy | L160 |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|----------------------|----------------------|-----------------------|----------------|---|
| XBQ2Q2Q | XB | Q | 4/0 Concentric | 4/0 Concentric | 250 or 250PLUSF20 | Easy | L160 |
| XBQ2V2G | XB | Q | 250 kcmil Concentric | 2/0 Concentric | 250 or 250PLUSF20 | Easy | L160 |
| XBQ2V2Q | XB | Q | 250 kcmil Concentric | 4/0 Concentric | 150 x 2 or 300PLUSF20 | Easy | L160 |
| XBQ2V2V | XB | Q | 250 kcmil Concentric | 250 kcmil Concentric | 150 x 2 or 300PLUSF20 | Easy | L160 |
| XBV3A3A | XB | V | 300 kcmil Concentric | 300 kcmil Concentric | 200 x 2 or 400PLUSF20 | Easy | Includes Frame w/ Handles |
| XBV3D3D | XB | V | 350 kcmil Concentric | 350 kcmil Concentric | 500 or 500PLUSF20 | Easy | Includes Frame w/ Handles |
| XBV3H3H | XB | V | 400 kcmil Concentric | 400 kcmil Concentric | 200 x 3 or 600PLUSF20 | Easy | Includes Frame w/ Handles |
| XBV3Q3Q | ХВ | V | 500 kcmil Concentric | 500 kcmil Concentric | 200 x 3 or 600PLUSF20 | Easy | Includes Frame w/ Handles |

PG MOLDS

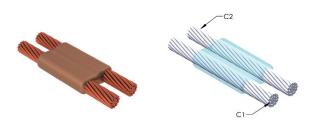

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|-----------|---------------|---------------|------------------|-------------|--|
| PGT08CU | PG | Т | #8 Solid | #8 Solid | 15 or 15PLUSF20 | Easy | Clamp Included |
| PGT10CU | PG | Т | #10 Solid | #10 Solid | 15 or 15PLUSF20 | Easy | Clamp Included |
| PGT1D1D | PG | Т | #8 Solid | #8 Solid | 15 or 15PLUSF20 | Easy | Clamp Included |
| PGT1G1G | PG | T | #6 Solid | #6 Solid | 25 or 25PLUSF20 | Easy | Clamp Included |
| PGT1G1H | PG | Т | #6 Solid | #6 Concentric | 25 or 25PLUSF20 | Easy | Clamp Included |
| PGT1H1H | PG | Т | #6 Concentric | #6 Concentric | 25 or 25PLUSF20 | Easy | Clamp Included |
| PGT1K1K | PG | Т | #4 Solid | #4 Solid | 32 or 32PLUSF20 | Easy | Clamp Included |

PT MOLDS






| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|---------------|---------------|------------------|-------------|--|
| PTC1D1D | PT | С | #8 Solid | #8 Solid | 25 or 25PLUSF20 | Preferred | L160 |
| PTC1G1G | PT | С | #6 Solid | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PTC1H1H | PT | С | #6 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PTC1K1K | PT | С | #4 Solid | #4 Solid | 32 or 32PLUSF20 | Preferred | L160 |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|-------------------------------|---------------------------|--|------------------------|--|
| PTC1L1D | PT | С | #4 Concentric | #8 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PTC1L1G | PT | С | #4 Concentric | #6 Solid | 32 or 32PLUSF20 | Preferred | L160 |
| PTC1L1H | PT | С | #4 Concentric | #6 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PTC1L1L | PT | С | #4 Concentric | #4 Concentric | 32 or 32PLUSF20 | Preferred | L160 |
| PTC1T1D | PT | С | #2 Solid | #8 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| PTC1T1G | PT | С | #2 Solid | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| PTC1T1H | PT | C | #2 Solid | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| PTC1T1K | PT | С | #2 Solid | #4 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1T1L | PT | С | #2 Solid | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1T1T | PT | С | #2 Solid | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1T1V | PT | С | #2 Solid | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1V1D | PT | С | #2 Concentric | #8 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| PTC1V1G | PT | С | #2 Concentric | #6 Solid | 45 or 45PLUSF20 | Preferred | L160 |
| PTC1V1H | PT | С | #2 Concentric | #6 Concentric | 45 or 45PLUSF20 | Preferred | L160 |
| PTC1V1K | PT | С | #2 Concentric | #4 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1V1L | PT | С | #2 Concentric | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1V1T | PT | С | #2 Concentric | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1V1V | PT | С | #2 Concentric | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1Y1G | PT | С | #1 Concentric | #6 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1Y1T | PT | С | #1 Concentric | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC1Y1Y | PT | С | #1 Concentric | #1 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1D | PT | С | 1/0 Concentric | #8 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1G | PT | С | 1/0 Concentric | #6 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1H | PT | С | 1/0 Concentric | #6 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1L | PT | С | 1/0 Concentric | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1T | PT | С | 1/0 Concentric | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1V | PT | С | 1/0 Concentric | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C1Y | PT | С | 1/0 Concentric | #1 Concentric | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2C2C | PT | С | 1/0 Concentric | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G1D | PT | С | 2/0 Concentric | #8 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G1G | PT | С | 2/0 Concentric | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G1H | PT | С | 2/0 Concentric | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G1K | PT | С | 2/0 Concentric | #4 Solid | 65 or 65PLUSF20 | Preferred | L160 |
| PTC2G1L | PT | С | 2/0 Concentric | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G1T | PT | С | 2/0 Concentric | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G1V | PT | С | 2/0 Concentric | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2G2C | PT | С | 2/0 Concentric | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PTC2G2G | PT | С | 2/0 Concentric | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 |
| PTC2Q1D | PT | С | 4/0 Concentric | #8 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2Q1G | PT | С | 4/0 Concentric | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2Q1H | PT | С | 4/0 Concentric | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 |
| PTC2Q1K | PT | С | 4/0 Concentric 4/0 Concentric | #4 Solid #4 Concentric | 150 or 150PLUSF20 | Preferred Preferred | L160 |
| PTC2Q1L PTC2Q1T | PT PT | C | 4/0 Concentric | #2 Solid | 150 or 150PLUSF20 150 or 150PLUSF20 | Preferred | L160 L160 |
| PTC2Q11 | PT | С | 4/0 Concentric | #2 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PTC2Q1V | PT | С | | #1 Concentric | | | |
| PTC2Q1Y PTC2Q2C | PT | C | 4/0 Concentric 4/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 150 or 150PLUSF20 | Preferred Preferred | L160 L160 |
| PTC2Q2C | PT | С | 4/0 Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PTC2Q2Q | PT | С | 4/0 Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PTC2Q2Q PTC2V1T | PT | С | 250 kcmil Concentric | #2 Solid | 150 or 150PLUSF20 | Preferred | L160 |
| PTC2V11 | PT | С | 250 kcmil Concentric | #2 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PTC2V1V | PT | С | 250 kcmil Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PTC2V2G | PT | С | 250 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PTC2V2Q | PT | С | 250 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PTC2V2V | PT | С | 250 kcmil Concentric | 250 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| PTC3A2Q | PT | С | 300 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PTC3A3A | PT | С | 300 kcmil Concentric | 300 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| PTC3D2Q | PT | С | 350 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| | | - | | ., | 2001 2001 20 | | |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|-----------------------|-----------------------|------------------------|-------------|--|
| PTC3D2V | PT | С | 350 kcmil Concentric | 250 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| PTC3D3D | PT | С | 350 kcmil Concentric | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| PTC3H2Q | PT | С | 400 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PTC3Q2G | PT | С | 500 kcmil Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 |
| PTC3Q2Q | PT | С | 500 kcmil Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L160 |
| PTC3Q2V | PT | С | 500 kcmil Concentric | 250 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| PTC3Q3A | PT | С | 500 kcmil Concentric | 300 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| PTC3Q3D | PT | С | 500 kcmil Concentric | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| PTC4L2Q | PT | С | 750 kcmil Concentric | 4/0 Concentric | 250 or 250PLUSF20 | Preferred | L160 |
| PTC4Y2Q | PT | С | 1000 kcmil Concentric | 4/0 Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| PTC2Q2Q | PT | D | 4/0 Concentric | 4/0 Concentric | 200 or 200PLUSF20 | Preferred | L159 |
| PTD3H3H | PT | D | 400 kcmil Concentric | 400 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| PTD3Q3Q | PT | D | 500 kcmil Concentric | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| PTF4L4L | PT | F | 750 kcmil Concentric | 750 kcmil Concentric | 250 x 3 or 750PLUSF20 | Preferred | L159 |
| PTF4Y4Y | PT | F | 1000 kcmil Concentric | 1000 kcmil Concentric | 500 x 2 or 1000PLUSF20 | Preferred | L159 |

PH MOLDS





| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|----------------------|-------------------------|--------------------------|-------------|---|
| PHJ2Q2Q | PH | J | 4/0 Concentric | 4/0 Concentric | 200 x 2 or 400PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHJ2V2Q | PH | J | 250 kcmil Concentric | 4/0 Concentric | 200 x 2 or 400PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHJ2V2V | PH | J | 250 kcmil Concentric | 250 kcmil Concentric | 200 x 2 or 400PLUSF20 | Difficult | Include Frame & Requires L159 |
| РНЈЗАЗА | PH | J | 300 kcmil Concentric | 300 kcmil Concentric | 200 x 2 or 400PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHJ3D2Q | PH | J | 350 kcmil Concentric | 4/0 Concentric | 200 x 2 or 400PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHJ3D2V | PH | J | 350 kcmil Concentric | 250 kcmil Concentric | 200 x 2 or 400PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHJ3Q2Q | PH | J | 500 kcmil Concentric | 4/0 Concentric | 500 or 500PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHJ3Q3Q | PH | J | 500 kcmil Concentric | 500 kcmil Concentric | 250 x 3 or 750PLUSF20 | Difficult | Include Frame & Requires L159 |
| PHR1K1K | PH | R | #4 Solid | #4 Solid | 65 or 65PLUSF20 | Difficult | L160 |
| PHR1L1L | PH | R | #4 Concentric | #4 Concentric | 65 or 65PLUSF20 | Difficult | L160 |
| PHR1T1T | PH | R | #2 Solid | #2 Solid | 115 or 115PLUSF20 | Difficult | L160 |
| PHR1V1L | PH | R | #2 Concentric | #4 Concentric | 90 or 90PLUSF20 | Difficult | L160 |
| PHR1V1T | PH | R | #2 Concentric | #2 Solid | 115 or 115PLUSF20 | Difficult | L160 |
| PHR1V1V | PH | R | #2 Concentric | #2 Concentric | 115 or 115PLUSF20 | Difficult | L160 |
| PHR2C1T | PH | R | 1/0 Concentric | #2 Solid | 115 or 115PLUSF20 | Difficult | L160 |
| PHR2C1V | PH | R | 1/0 Concentric | #2 Concentric | 115 or 115PLUSF20 | Difficult | L160 |
| PHR2C2C | PH | R | 1/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Difficult | L160 |
| PHR2G1L | PH | R | 2/0 Concentric | #4 Concentric | 115 or 115PLUSF20 | Difficult | L160 |

| Global Part Number | Mold Family | Price Key | Conductor 1 | Conductor 2 | Welding Material | Ease of Use | Handle Clamp (Sold separately unless noted) |
|-----------------------|----------------|--------------|----------------|----------------|-------------------|-------------|---|
| PHR2G1T | PH | R | 2/0 Concentric | #2 Solid | 150 or 150PLUSF20 | Difficult | L160 |
| PHR2G1V | PH | R | 2/0 Concentric | #2 Concentric | 150 or 150PLUSF20 | Difficult | L160 |
| PHR2G2C | PH | R | 2/0 Concentric | 1/0 Concentric | 150 or 150PLUSF20 | Difficult | L160 |
| PHR2G2G | PH | R | 2/0 Concentric | 2/0 Concentric | 150 or 150PLUSF20 | Difficult | L160 |
| PHR2Q1T | PH | R | 4/0 Concentric | #2 Solid | 200 or 200PLUSF20 | Difficult | L160 |
| PHR2Q1V | PH | R | 4/0 Concentric | #2 Concentric | 200 or 200PLUSF20 | Difficult | L160 |
| PHR2Q2C | PH | R | 4/0 Concentric | 1/0 Concentric | 250 or 250PLUSF20 | Difficult | L160 |
| PHR2Q2G | PH | R | 4/0 Concentric | 2/0 Concentric | 250 or 250PLUSF20 | Difficult | L160 |
| PHT1D1D | PH | Т | #8 Solid | #8 Solid | 25 or 25PLUSF20 | Difficult | Clamp Included |

CABLE TO GROUND ROD SPLICE



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- Connections are visually inspected

GB MOLDS





| Global Part Number | Mold Family | Price Key | Ground Rod Diameter (Nominal) | Ground Rod Diameter (Actual) | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp Required | Other Accessories Required |
|-----------------------|----------------|--------------|--|---------------------------------------|-----------------|------------------------------|----------------|-----------------------------|----------------------------------|
| HDGBR12 | GB | R | 3/8" | 0.375" | Steel | 250 or 250PLUSF20 | Preferred | L160 | B120 |
| HDGBC14S | GB | С | 1/2" | 0.505" | Steel | 200 or 200PLUSF20 | Preferred | L160 | B120 |
| HDGBD16 | GB | D | 5/8" | 0.563" | Copper-bonded | 150 x 2 or 300PLUSF20 | Preferred | L159 | B120 |
| HDGBD31 | GB | D | 5/8" | 0.625" | Steel | 150 x 2 or 300PLUSF20 | Preferred | L159 | B120 |
| HDGBF18 | GB | F | 3/4" | 0.682" | Copper-bonded | 200 x 2 or 400PLUSF20 | Preferred | L159 | B120 |
| HDGBF22 | GB | F | 1" | 0.914" | Copper-bonded | 250 x 3 or 750PLUSF20 | Preferred | L159 | B120 |
| HDGBF33 | GB | F | 3/4" | 0.750" | Steel | 200 x 2 or 400PLUSF20 | Preferred | L159 | B120 |
| HDGBF37 | GB | F | 1" | 1.000" | Steel | 250 x 3 or 750PLUSF20 | Preferred | L159 | B120 |
| HDGBR15 | GB | R | 1/2" | 0.475" | Copper-bonded | 250 or 250PLUSF20 | Preferred | L160 | B120 |



| Global Part Number | Mold Family | Price Key | Ground Rod Diameter (Nominal) | Ground Rod Diameter (Actual) | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|-------------|--------------|-------------------------------------|------------------------------------|--------------------|------------------------------|-------------|--------------------------|
| GEC18 | GE | С | 3/4" | 0.682" | Copper-bonded | 200 or 200PLUSF20 | Preferred | L160 |
| GEC14 | GE | С | 1/2" | 0.505" | Steel | 150 or 150PLUSF20 | Preferred | L160 |
| GEC16 | GE | С | 5/8" | 0.563" | Copper-bonded | 115 or 115PLUSF20 | Preferred | L160 |
| GEC31 | GE | С | 5/8" | 0.625" | Steel | 200 or 200PLUSF20 | Preferred | L160 |

CABLE TO GROUND ROD OR OTHER ROUNDS



GR MOLDS

- Forms a permanent, low resistance connection
- · Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power
- Installers can be easily trained to make Cadweld Exothermic Connections
- Connections are visually inspected





| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|-------------------------|------------------|----------------|-----------------|----------------------------------|
| GRC141V | GR | С | Steel | 1/2" | 0.505" | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC141Y | GR | С | Steel | 1/2" | 0.505" | #1 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC142C | GR | С | Steel | 1/2" | 0.505" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC142G | GR | С | Steel | 1/2" | 0.505" | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC142Q | GR | С | Steel | 1/2" | 0.505" | 4/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC142V | GR | С | Steel | 1/2" | 0.505" | 250 kcmil Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC161E | GR | С | Copper-bonded | 5/8" | 0.563" | #8 Concentric | 65 or 65PLUSF20 | Preferred | L160 | B1331L |
| GRC161G | GR | С | Copper-bonded | 5/8" | 0.563" | #6 Solid | 65 or 65PLUSF20 | Preferred | L160 | B1331L |

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|--------------------------------------|--------------------------------|----------------|-----------------|----------------------------------|
| GRC161H | GR | С | Copper-bonded | 5/8" | 0.563" | #6 Concentric | 65 or 65PLUSF20 | Preferred | L160 | B112 |
| GRC161K | GR | С | Copper-bonded | 5/8" | 0.563" | #4 Solid | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC161L | GR | С | Copper-bonded | 5/8" | 0.563" | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC161T | GR | С | Copper-bonded | 5/8" | 0.563" | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC161V | GR | С | Copper-bonded | 5/8" | 0.563" | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC161Y | GR | С | Copper-bonded | 5/8" | 0.563" | #1 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC162C | GR | С | Copper-bonded | 5/8" | 0.563" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC162G | GR | С | Copper-bonded | 5/8" | 0.563" | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC162Q | GR | С | Copper-bonded | 5/8" | 0.563" | 4/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC162V | GR | С | Copper-bonded | 5/8" | 0.563" | 250 kcmil Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC163A | GR | С | Copper-bonded | 5/8" | 0.563" | 300 kcmil Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GRC163D | GR | С | Copper-bonded | 5/8" | 0.563" | 350 kcmil Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GRC163H | GR | С | Copper-bonded | 5/8" | 0.563" | 400 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC163Q | GR | С | Copper-bonded | 5/8" | 0.563" | 500 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC181G | GR | С | Copper-bonded | 3/4" | 0.682" | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 | B1331L |
| GRC181H | GR | С | Copper-bonded | 3/4" | 0.682" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 |
| GRC181K | GR | С | Copper-bonded | 3/4" | 0.682" | #4 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC181L | GR | С | Copper-bonded | 3/4" | 0.682" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC181T | GR | С | Copper-bonded | 3/4" | 0.682" | #2 Solid | | Preferred | L160 | |
| GRC181V | GR | С | Copper-bonded | | 0.682" | #2 Concentric | 90 or 90PLUSF20 | | L160 | |
| GRC181Y | GR | С | Copper-bonded | | 0.682" | #1 Concentric | | Preferred | L160 | |
| GRC182C | GR | С | Copper-bonded | | 0.682" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC182G | GR | С | Copper-bonded | | 0.682" | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC182Q | GR | С | Copper-bonded | 3/4" | 0.682" | 4/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC182V | GR | С | Copper-bonded | 3/4" | 0.682" | 250 kcmil Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC183A | GR | С | Copper-bonded | 3/4" | 0.682" | 300 kcmil Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GRC183D | GR | С | Copper-bonded | 3/4" | 0.682" | 350 kcmil Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GRC183H | GR | С | Copper-bonded | 3/4" | 0.682" | 400 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC183Q | GR | С | Copper-bonded | 3/4" | 0.682" | 500 kcmil Concentric 750 kcmil | 150 or 150PLUSF20 250 or | Preferred | L160 | |
| GRC184L | GR | С | Copper-bonded | 3/4" | 0.682" | Concentric | 250PLUSF20 | Preferred | L160 | |
| GRC221T | GR | С | Copper-bonded | 1" | 0.914" | #2 Solid | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC221V | GR | С | Copper-bonded | 1" | 0.914" | #2 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC222C | GR | С | Copper-bonded | 1" | 0.914" | 1/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC222G | GR | С | Copper-bonded | 1" | 0.914" | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC222Q | GR | С | Copper-bonded | 1" | 0.914" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GRC222V | GR | С | Copper-bonded | 1" | 0.914" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |

| GRC2230 | Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|--|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|----------------|------------------|----------------|-----------------|----------------------------------|
| CRC2341 | GRC223D | GR | С | Copper-bonded | 1" | 0.914" | | | Preferred | L160 | |
| Second Concentric SopPluSF20 Preferred Life | GRC223Q | GR | С | Copper-bonded | 1" | 0.914" | | | Preferred | L160 | |
| GRC311T GR | GRC224L | GR | С | Copper-bonded | 1" | 0.914" | | | Preferred | L160 | |
| GRC311V GR | GRC311L | GR | С | Steel | 5/8" | 0.625" | #4 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC312C GR | GRC311T | GR | С | Steel | 5/8" | 0.625" | #2 Solid | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC3126 GR | GRC311V | GR | С | Steel | 5/8" | 0.625" | #2 Concentric | 65 or 65PLUSF20 | Preferred | L160 | |
| GRC312Q GR | GRC312C | GR | С | Steel | 5/8" | 0.625" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC312V GR | GRC312G | GR | С | Steel | 5/8" | 0.625" | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC312V GR | GRC312Q | GR | С | Steel | 5/8" | 0.625" | 4/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC331Q GR C Steel 3/4" 0.750" #6 Concentric 150PLUSF20 Preferred L160 B112 GRC331L GR C Steel 3/4" 0.750" #6 Concentric 90 or 90PLUSF20 Preferred L160 B112 GRC331L GR C Steel 3/4" 0.750" #2 Concentric 90 or 90PLUSF20 Preferred L160 GRC331V GR C Steel 3/4" 0.750" #2 Concentric 90 or 90PLUSF20 Preferred L160 GRC331V GR C Steel 3/4" 0.750" #2 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" #2 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 1/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 250 kcmil Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 250 kcmil Concentric 150PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 250 kcmil Concentric 150PLUSF20 Preferred L160 GRC332Q GR C Steel 1" 1.000" 1/0 Concentric 150PLUSF20 Preferred L160 GRC332Q GR C Steel 1" 1.000" 1/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 2/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 2/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 2/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 0.001" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 0.001" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1.000" 4/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Ste | GRC312V | GR | С | Steel | 5/8" | 0.625" | | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC331L GR C Steel 3/4" 0.750" #4 Concentric 90 or 90PLUSF20 Preferred L160 GRC331T GR C Steel 3/4" 0.750" #2 Solid 90 or 90PLUSF20 Preferred L160 GRC331V GR C Steel 3/4" 0.750" #2 Concentric 90 or 90PLUSF20 Preferred L160 GRC331V GR C Steel 3/4" 0.750" 1/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 1/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 1/" 1.000" 1/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1/" 1.000" 2/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1/" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1/" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1/" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1/" 0.914" 1.000 kmill 200 x 2 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1/2 0.505" 4/6 Solid 25 or 25PLUSF20 Preferred L159 GRP141G GR P Steel 1/2" 0.505" 4/4 Solid 4/5 or 45PLUSF20 Preferred Mini EZ Attached B399B GRP161V GR P Copper-bonded 3/4" 0.682" 4/4 Concentric 4/5 or 45PLUSF20 Preferred Mini EZ Attached B399B GRP181L GR P Copper-bonded 3/4" 0.682" 4/4 Concentric 4/5 or 45PLUSF20 Preferred Mini EZ Attached Mini EZ Attached B399B GRP181V GR P Copper-bonded 3/4" 0.682" 4/4 Concentric 4/5 or 45PLUSF20 Preferred Mini EZ Attached GRP31K GR P Steel 3/4" 0.750" 4/4 Solid 4/5 or 45PLUSF20 Preferred Mini EZ Attached GRP31K GR P Steel 3/4" 0.750" 4/4 Solid 4/ | GRC313Q | GR | С | Steel | 5/8" | 0.625" | | | Preferred | L160 | |
| GRC331T GR C Steel 3/4" 0.750" #2 Solid 90 or 90PLUSF20 Preferred L160 GRC331V GR C Steel 3/4" 0.750" #2 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 1/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4" 0.750" 250 kcmil 90 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4" 0.750" 500 kcmil 150 or 150PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 4/0 Concentric 150 or 150PLU | GRC331H | GR | С | Steel | 3/4" | 0.750" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 |
| GRC331V GR C Steel 3/4" 0.750" #2 Concentric 90 or 90 PLUSF20 Preferred L160 GRC332C GR C Steel 3/4" 0.750" 1/0 Concentric 90 or 90 PLUSF20 Preferred L160 GRC332G GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90 PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 4/0 Concentric 90 or 90 PLUSF20 Preferred L160 GRC332V GR C Steel 3/4" 0.750" 2/50 kcmil 50 or 150 Or 150 PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4" 0.750" 500 kcmil 150 or 150 Or 150 PLUSF20 Preferred L160 GRC332Q GR C Steel 1" 1.000" 1/0 Concentric 150 or 150 PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 2/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 0.914" 1000 kcmil 200 x 2 or 400 PLUSF20 Preferred L159 GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25 PLUSF20 Preferred L159 GRP141G GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45 PLUSF20 Preferred B399B GRP161V GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45 PLUSF20 Preferred B399B GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ | GRC331L | GR | С | Steel | 3/4" | 0.750" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC332C GR C Steel 3/4" 0.750" 1/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332G GR C Steel 3/4" 0.750" 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4" 0.750" 250 kcmil 250 kcmil 160 GRC332V GR C Steel 3/4" 0.750" 250 kcmil 200 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4" 0.750" 500 kcmil 150 or 15 | GRC331T | GR | С | Steel | 3/4" | 0.750" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC332G GR C Steel 3/4* 0.750* 2/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332Q GR C Steel 3/4* 0.750* 4/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4* 0.750* 250 kcmill Concentric 90 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4* 0.750* 500 kcmill Concentric 150 or 150PLUSF20 Preferred L160 GRC372C GR C Steel 1* 1.000* 2/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1* 1.000* 2/0 Concentric 150 or 150PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1* 0.914* 1000 kcmil 200 x 2 or 40PLUSF20 Preferred L160 GRP141G GR P Steel 1/2* 0.505* #6 So | GRC331V | GR | С | Steel | 3/4" | 0.750" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC332Q GR C Steel 3/4" 0.750" 4/0 Concentric 90 or 90PLUSF20 Preferred L160 GRC332V GR C Steel 3/4" 0.750" 250 kcmil Concentric 90 or 90PLUSF20 Preferred L160 GRC333Q GR C Steel 3/4" 0.750" 500 kcmil Concentric 150 or 150PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 2/0 Concentric 150 or 150PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1" 0.914" 1000 kcmil 200 x 2 or 400PLUSF20 Preferred L160 GRP141G GR P Steel 1/2" 0.563" <t< td=""><td>GRC332C</td><td>GR</td><td>С</td><td>Steel</td><td>3/4"</td><td>0.750"</td><td>1/0 Concentric</td><td>90 or 90PLUSF20</td><td>Preferred</td><td>L160</td><td></td></t<> | GRC332C | GR | С | Steel | 3/4" | 0.750" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC332V GR C Steel 3/4" 0.750" 250 kcmil Concentric 90 or 90PLUSF20 Preferred L160 GRC333Q GR C Steel 3/4" 0.750" 500 kcmil T50PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372G GR C Steel 1" 1.000" 2/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1" 0.914" 1000 kcmil 200 x 2 or 400PLUSF20 Preferred L160 GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred L160 GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45 | GRC332G | GR | С | Steel | 3/4" | 0.750" | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC332V GR C Steel 3/4" 0.750" Concentric 90 07 90 PLUSF20 Preferred L160 GRC333Q GR C Steel 3/4" 0.750" S00 kcmil 150 or 150 PLUSF20 Preferred L160 GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRC372G GR C Steel 1" 1.000" 2/0 Concentric 150 or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 Or 150 PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1" 0.914" 1000 kcmil Concentric 200 x 2 or 400 PLUSF20 Preferred L159 GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25 PLUSF20 Preferred Mini EZ Attached GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Steel 3/4" 0.682" #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Steel 3/4" 0.682" #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4" 0.505" #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4" 0.505" #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached | GRC332Q | GR | С | Steel | 3/4" | 0.750" | 4/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC372C GR C Steel 1' 1.000' 1/0 Concentric 150 PLUSF20 Preferred L160 GRC372G GR C Steel 1' 1.000' 1/0 Concentric 150 or 150 PLUSF20 Preferred L160 GRC372G GR C Steel 1' 1.000' 2/0 Concentric 150 or 150 PLUSF20 Preferred L160 GRC372Q GR C Steel 1' 1.000' 4/0 Concentric 150 or 150 PLUSF20 Preferred L160 GRC372Q GR D Copper-bonded 1' 0.914' 1000 kcmil 200 2 or 400 PLUSF20 Preferred L159 GRP141G GR P Steel 1/2' 0.505' #6 Solid 25 or 25 PLUSF20 Preferred Mini EZ Attached GRP161V GR P Copper-bonded 5/8' 0.563' #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4' 0.682' #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4' 0.682' #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4' 0.682' #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4' 0.682' #4 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP181V GR P Steel 3/4' 0.682' #2 Concentric 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP31K GR P Steel 3/4' 0.682' #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4' 0.750' #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4' 0.750' #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4' 0.750' #4 Solid 45 or 45 PLUSF20 Preferred Mini EZ | | GR | С | Steel | 3/4" | 0.750" | | 90 or 90PLUSF20 | Preferred | L160 | |
| GRC372C GR C Steel 1" 1.000" 1/0 Concentric 150PLUSF20 Preferred L160 GRC372G GR C Steel 1" 1.000" 2/0 Concentric 150 or 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1" 0.914" 1000 kcmil Concentric 200 x 2 or 400PLUSF20 Preferred L159 GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred Mini EZ Mitached GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" | GRC333Q | GR | С | Steel | 3/4" | 0.750" | | | Preferred | L160 | |
| GRC372Q GR C Steel 1" 1.000" 2/0 Concentric 150PLUSF20 Preferred L160 GRC372Q GR C Steel 1" 1.000" 4/0 Concentric 150 or 150PLUSF20 Preferred L160 GRD224Y GR D Copper-bonded 1" 0.914" 1000 kcmil 200 x 2 or 400PLUSF20 Preferred L159 GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred Mini EZ Attached GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP331K GR P | GRC372C | GR | С | Steel | 1" | 1.000" | 1/0 Concentric | | Preferred | L160 | |
| GRD224Y GR D Copper-bonded 1" 0.914" 1000 kcmil Concentric 200 x 2 or 400PLUSF20 Preferred L159 GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred L159 GRP161V GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred Mini EZ Attached GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel </td <td>GRC372G</td> <td>GR</td> <td>С</td> <td>Steel</td> <td>1"</td> <td>1.000"</td> <td>2/0 Concentric</td> <td></td> <td>Preferred</td> <td>L160</td> <td></td> | GRC372G | GR | С | Steel | 1" | 1.000" | 2/0 Concentric | | Preferred | L160 | |
| GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred Hin EZ Attached GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Steel 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached B399B Mini EZ Attached | GRC372Q | GR | С | Steel | 1" | 1.000" | 4/0 Concentric | | Preferred | L160 | |
| GRP141G GR P Steel 1/2" 0.505" #6 Solid 25 or 25PLUSF20 Preferred Mini EZ Attached GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Steel 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached B399B Mini EZ Attached B399B Mini EZ Attached B399B Mini EZ Attached | GRD224Y | GR | D | Copper-bonded | 1" | 0.914" | | | Preferred | L159 | |
| GRP161V GR P Copper-bonded 5/8" 0.563" #2 Concentric 45 or 45PLUSF20 Preferred Attached GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached B399B Mini EZ Attached B399B Mini EZ Attached B399B Mini EZ Attached B399B Mini EZ Attached GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ | GRP141G | GR | Р | Steel | 1/2" | 0.505" | #6 Solid | 25 or 25PLUSF20 | Preferred | Mini EZ | |
| GRP181K GR P Copper-bonded 3/4" 0.682" #4 Solid 45 or 45PLUSF20 Preferred Attached GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached B399B Mini EZ Attached B399B Mini EZ Attached GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ | GRP161V | GR | Р | Copper-bonded | 5/8" | 0.563" | #2 Concentric | 45 or 45PLUSF20 | Preferred | Mini EZ | |
| GRP181L GR P Copper-bonded 3/4" 0.682" #4 Concentric 45 or 45PLUSF20 Preferred Attached GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Mini EZ Attached B399B Mini EZ Attached GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ | GRP181K | GR | Р | Copper-bonded | 3/4" | 0.682" | #4 Solid | 45 or 45PLUSF20 | Preferred | Mini EZ | |
| GRP181V GR P Copper-bonded 3/4" 0.682" #2 Concentric 45 or 45PLUSF20 Preferred Attached GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ Mini EZ Attached B399B GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ | GRP181L | GR | Р | Copper-bonded | 3/4" | 0.682" | #4 Concentric | 45 or 45PLUSF20 | Preferred | Mini EZ | |
| GRP331K GR P Steel 3/4" 0.750" #4 Solid 45 or 45PLUSF20 Preferred Mini EZ | GRP181V | GR | Р | Copper-bonded | 3/4" | 0.682" | #2 Concentric | 45 or 45PLUSF20 | Preferred | Mini EZ | |
| | GRP331K | GR | Р | Steel | 3/4" | 0.750" | #4 Solid | 45 or 45PLUSF20 | Preferred | Mini EZ | |

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|----------------|------------------|----------------|------------------------------|----------------------------------|
| GRP331L | GR | Р | Steel | 3/4" | 0.750" | #4 Concentric | 45 or 45PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GRP371K | GR | Р | Steel | 1" | 1.000" | #4 Solid | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GRP371L | GR | Р | Steel | 1" | 1.000" | #4 Concentric | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GRT14A1G | GR | Т | Steel | 1/2" | 0.505" | #6 Solid | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14A1H | GR | Т | Steel | 1/2" | 0.505" | #6 Concentric | 25 or 25PLUSF20 | Preferred | Attached | |
| GRT14A1K | GR | Т | Steel | 1/2" | 0.505" | #4 Solid | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14A1L | GR | Т | Steel | 1/2" | 0.505" | #4 Concentric | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14A1T | GR | Т | Steel | 1/2" | 0.505" | #2 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14A1V | GR | Т | Steel | 1/2" | 0.505" | #2 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14B1G | GR | Т | Copper-bonded | 1/2" | 0.562" | #6 Solid | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14B1H | GR | Т | Copper-bonded | 1/2" | 0.562" | #6 Concentric | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14C1G | GR | Т | Steel | 1/2" | 0.505" | #6 Solid | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14C1H | GR | Т | Steel | 1/2" | 0.505" | #6 Concentric | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14C1K | GR | Т | Steel | 1/2" | 0.505" | #4 Solid | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14C1L | GR | Т | Steel | 1/2" | 0.505" | #4 Concentric | 25 or 25PLUSF20 | Preferred | Attached | |
| GRT14C1T | GR | Т | Steel | 1/2" | 0.505" | #2 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GRT14C1V | GR | Т | Steel | 1/2" | 0.500" | #2 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |






| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|-------------------------|-------------------|-------------|-----------------|----------------------------------|
| GTC141G | GT | С | Steel | 1/2" | 0.505" | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 | B1331L x 2 |
| GTC141T | GT | С | Steel | 1/2" | 0.505" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC141V | GT | С | Steel | 1/2" | 0.505" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC142C | GT | С | Steel | 1/2" | 0.505" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC142G | GT | С | Steel | 1/2" | 0.505" | 2/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC142Q | GT | С | Steel | 1/2" | 0.505" | 4/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC142V | GT | С | Steel | 1/2" | 0.505" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC143Q | GT | С | Steel | 1/2" | 0.505" | 500 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC181K | GT | С | Copper-bonded | 3/4" | 0.682" | #4 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC181L | GT | С | Copper-bonded | 3/4" | 0.682" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC181T | GT | С | Copper-bonded | 3/4" | 0.682" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC181V | GT | С | Copper-bonded | 3/4" | 0.682" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC181Y | GT | С | Copper-bonded | 3/4" | 0.682" | #1 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC182C | GT | С | Copper-bonded | 3/4" | 0.682" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC182G | GT | С | Copper-bonded | 3/4" | 0.682" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC182Q | GT | С | Copper-bonded | 3/4" | 0.682" | 4/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC182V | GT | С | Copper-bonded | 3/4" | 0.682" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC183A | GT | С | Copper-bonded | 3/4" | 0.682" | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC183D | GT | С | Copper-bonded | 3/4" | 0.682" | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC183H | GT | С | Copper-bonded | 3/4" | 0.682" | 400 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC183Q | GT | С | Copper-bonded | 3/4" | 0.682" | 500 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC221K | GT | С | Copper-bonded | 1" | 0.914" | #4 Solid | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC221L | GT | С | Copper-bonded | 1" | 0.914" | #4 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC221T | GT | С | Copper-bonded | 1" | 0.914" | #2 Solid | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC221V | GT | С | Copper-bonded | 1" | 0.914" | #2 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC221Y | GT | С | Copper-bonded | 1" | 0.914" | #1 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC222C | GT | С | Copper-bonded | 1" | 0.914" | 1/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC222G | GT | С | Copper-bonded | 1" | 0.914" | 2/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC222Q | GT | С | Copper-bonded | 1" | 0.914" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC222V | GT | С | Copper-bonded | 1" | 0.914" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC223D | GT | С | Copper-bonded | 1" | 0.914" | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC223H | GT | С | Copper-bonded | 1" | 0.914" | 400 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|--------------------------|--------------------------|-------------|-----------------|----------------------------------|
| GTC223Q | GT | С | Copper-bonded | 1" | 0.914" | 500 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC311L | GT | С | Steel | 5/8" | 0.625" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC311T | GT | С | Steel | 5/8" | 0.625" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC311V | GT | С | Steel | 5/8" | 0.625" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC311Y | GT | С | Steel | 5/8" | 0.625" | #1 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC312C | GT | С | Steel | 5/8" | 0.625" | 1/0 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC312G | GT | С | Steel | 5/8" | 0.625" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC312Q | GT | С | Steel | 5/8" | 0.625" | 4/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC312V | GT | С | Steel | 5/8" | 0.625" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC313A | GT | С | Steel | 5/8" | 0.625" | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC313D | GT | С | Steel | 5/8" | 0.625" | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC313H | GT | С | Steel | 5/8" | 0.625" | 400 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC313Q | GT | С | Steel | 5/8" | 0.625" | 500 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC331T | GT | С | Steel | 3/4" | 0.750" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC331Y | GT | С | Steel | 3/4" | 0.750" | #1 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC333H | GT | С | Steel | 3/4" | 0.750" | 400 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC331V | GT | С | Steel | 3/4" | 0.750" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GTC332C | GT | С | Steel | 3/4" | 0.750" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC332G | GT | С | Steel | 3/4" | 0.750" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC332Q | GT | С | Steel | 3/4" | 0.750" | 4/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GTC332V | GT | С | Steel | 3/4" | 0.750" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC333A | GT | С | Steel | 3/4" | 0.750" | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC333D | GT | С | Steel | 3/4" | 0.750" | 350 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC333Q | GT | С | Steel | 3/4" | 0.750" | 500 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTC371L | GT | С | Steel | 1" | 1.000" | #4 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC371V | GT | С | Steel | 1" | 1.000" | | 150 or 150PLUSF20 | | L160 | |
| GTC372C | GT | С | Steel | 1" | 1.000" | 1/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC372G | GT | С | Steel | 1" | 1.000" | | 150 or 150PLUSF20 | | L160 | |
| GTC372Q | GT | С | Steel | 1" | 1.000" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GTC372V | GT | С | Steel | 1" | 1.000" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GTC373Q | GT | С | Steel | 1" | 1.000" | 500 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GTD164L | GT | D | Copper-bonded | 5/8" | 0.563" | 750 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GTD184L | GT | D | Copper-bonded | 3/4" | 0.682" | 750 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GTD184Y | GT | D | Copper-bonded | 3/4" | 0.682" | 1000 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|--------------------------|-------------------|-------------|------------------------------|----------------------------------|
| GTD224L | GT | D | Copper-bonded | 1" | 0.914" | 750 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GTD224Y | GT | D | Copper-bonded | 1" | 0.914" | 1000 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GTD374Y | GT | D | Steel | 1" | 1.000" | 1000 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GTP161T | GT | Р | Copper-bonded | 5/8" | 0.563" | #2 Solid | 45 or 45PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP161V | GT | Р | Copper-bonded | 5/8" | 0.563" | #2 Concentric | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP181G | GT | Р | Copper-bonded | 3/4" | 0.682" | #6 Solid | 45 or 45PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP181H | GT | Р | Copper-bonded | 3/4" | 0.682" | #6 Concentric | 45 or 45PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP181K | GT | Р | Copper-bonded | 3/4" | 0.682" | #4 Solid | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP181L | GT | Р | Copper-bonded | 3/4" | 0.682" | #4 Concentric | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP181T | GT | Р | Copper-bonded | 3/4" | 0.682" | #2 Solid | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP181V | GT | Р | Copper-bonded | 3/4" | 0.682" | #2 Concentric | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP331G | GT | Р | Steel | 3/4" | 0.750" | #6 Solid | 45 or 45PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP331H | GT | Р | Steel | 3/4" | 0.750" | #6 Concentric | 45 or 45PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP331K | GT | Р | Steel | 3/4" | 0.750" | #4 Solid | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTP331L | GT | Р | Steel | 3/4" | 0.750" | #4 Concentric | 65 or 65PLUSF20 | Preferred | B399B Mini EZ Attached | |
| GTT14A1A | GT | Т | Steel | 1/2" | 0.505" | #10 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14A1G | GT | Т | Steel | 1/2" | 0.505" | #6 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14A1H | GT | Т | Steel | 1/2" | 0.505" | #6 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14A1K | GT | Т | Steel | 1/2" | 0.505" | #4 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14A1L | GT | Т | Steel | 1/2" | 0.505" | #4 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|--------------------|------------------------------------|-----------------------------------|-------------------|------------------|-------------|------------------------------|----------------------------------|
| GTT14B1H | GT | Т | Copper-bonded | 1/2" | 0.562" | #6 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14C1G | GT | Т | Steel | 1/2" | 0.505" | #6 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14C1H | GT | Т | Steel | 1/2" | 0.505" | #6 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14C1K | GT | Т | Steel | 1/2" | 0.505" | #4 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT14C1L | GT | Т | Steel | 1/2" | 0.505" | #4 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT161G | GT | Т | Copper-bonded | 5/8" | 0.563" | #6 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT161H | GT | Т | Copper-bonded | 5/8" | 0.563" | #6 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT161K | GT | Т | Copper-bonded | 5/8" | 0.563" | #4 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT161L | GT | Т | Copper-bonded | 5/8" | 0.563" | #4 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT311G | GT | Т | Steel | 5/8" | 0.625" | #6 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT311H | GT | Т | Steel | 5/8" | 0.625" | #6 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT311K | GT | Т | Steel | 5/8" | 0.625" | #4 Solid | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |
| GTT311L | GT | Т | Steel | 5/8" | 0.625" | #4 Concentric | 32 or 32PLUSF20 | Preferred | B399A Mini EZ Attached | |

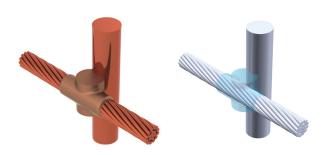


| Global Part | Mold | Price | Ground Rod | Ground Rod Diameter, | Ground Rod Diameter, | | | Ease of | Handle | Other Accessories |
|-------------|--------|-------|---------------|-------------------------|-------------------------|-------------------------|-------------------|-----------|--------|----------------------|
| Number | Family | Key | Туре | Nominal | Actual | Conductor Size | Welding Material | Use | Clamp | Required |
| GYE141V | GY | E | Steel | 1/2" | 0.505" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE142C | GY | Е | Steel | 1/2" | 0.505" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE142G | GY | E | Steel | 1/2" | 0.505" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE142L | GY | Е | Steel | 1/2" | 0.505" | 3/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE142Q | GY | Е | Steel | 1/2" | 0.505" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE142V | GY | Е | Steel | 1/2" | 0.505" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE161G | GY | Е | Copper-bonded | 5/8" | 0.563" | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 | B1331L x 2 |
| GYE161H | GY | Е | Copper-bonded | 5/8" | 0.563" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 x 2 |
| GYE161K | GY | Е | Copper-bonded | 5/8" | 0.563" | #4 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE161L | GY | Е | Copper-bonded | 5/8" | 0.563" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE161Q | GY | E | Copper-bonded | 5/8" | 0.563" | #3 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE161T | GY | Е | Copper-bonded | 5/8" | 0.563" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE161V | GY | E | Copper-bonded | 5/8" | 0.563" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE162C | GY | Е | Copper-bonded | 5/8" | 0.563" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE162G | GY | Е | Copper-bonded | 5/8" | 0.563" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE162Q | GY | Е | Copper-bonded | 5/8" | 0.563" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE162V | GY | Е | Copper-bonded | 5/8" | 0.563" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE163A | GY | Е | Copper-bonded | 5/8" | 0.563" | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GYE163D | GY | Е | Copper-bonded | 5/8" | 0.563" | 350 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GYE181G | GY | Е | Copper-bonded | 3/4" | 0.682" | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 | B1331L x 2 |
| GYE181H | GY | E | Copper-bonded | 3/4" | 0.682" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 x 2 |
| GYE181K | GY | Е | Copper-bonded | 3/4" | 0.682" | #4 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE181L | GY | Е | Copper-bonded | 3/4" | 0.682" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE181T | GY | Е | Copper-bonded | 3/4" | 0.682" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE181V | GY | Е | Copper-bonded | 3/4" | 0.682" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE181Y | GY | Е | Copper-bonded | 3/4" | 0.682" | #1 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE182C | GY | Е | Copper-bonded | 3/4" | 0.682" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE182G | GY | Е | Copper-bonded | 3/4" | 0.682" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE332V | GY | Е | Steel | 3/4" | 0.750" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GYE372G | GY | Е | Steel | 1" | 1.000" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE372Q | GY | Е | Steel | 1" | 1.000" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE372V | GY | Е | Steel | 1" | 1.000" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material | Ease of Use | Handle Clamp | Other Accessories Required |
|-----------------------|----------------|--------------|---------------------|------------------------------------|-----------------------------------|-------------------------------------|--|---------------------|-----------------|----------------------------------|
| GYF163Q | GY | F | Copper-bonded | 5/8" | 0.563" | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GYF183Q | GY | F | Copper-bonded | 3/4" | 0.682" | 500 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYF313H | GY | F | Steel | 5/8" | 0.625" | 400 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GYF313Q | GY | F | Steel | 5/8" | 0.625" | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GYF333Q | GY | F | Steel | 3/4" | 0.750" | 500 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYJ163H | GY | J | Copper-bonded | 5/8" | 0.563" | 400 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L159 | |
| GYJ163Q | GY | J | Copper-bonded | 5/8" | 0.563" | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GYJ164L | GY | J | Copper-bonded | 5/8" | 0.563" | 750 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYJ183D | GY | J | Copper-bonded | 3/4" | 0.682" | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L159 | |
| GYJ183H | GY | J | Copper-bonded | 3/4" | 0.682" | 400 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYJ183Q | GY | J | Copper-bonded | 3/4" | 0.682" | 500 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYJ184L | GY | J | Copper-bonded | 3/4" | 0.682" | 750 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYJ223D | GY | J | Copper-bonded | 1" | 0.914" | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L159 | |
| GYJ223Q | GY | J | Copper-bonded | | 0.914" | 500 kcmil Concentric | 500 or 500PLUSF20 | | L159 | |
| GYE182Q | GY | Е | Copper-bonded | 3/4" | 0.682" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE182V | GY | Е | Copper-bonded | | 0.682" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GYE189B | GY | Е | Copper-bonded | 3/4" | 0.682" | | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE222C | GY | Е | Copper-bonded | | 0.914" | | 115 or 115PLUSF20 | | L160 | |
| GYE222G | GY | Е | Copper-bonded | | 0.914" | | 115 or 115PLUSF20 | | L160 | |
| GYE222Q | GY | Е | Copper-bonded | 1" | 0.914" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYE222V | GY | Е | Copper-bonded | 1" | 0.914" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GYE223D | GY | Е | Copper-bonded | | 0.914" | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 | |
| GYE311T | GY | Е | Steel | 5/8" | 0.625" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE311V | GY | Е | Steel | 5/8" | 0.625" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE312C | GY | Е | Steel | 5/8" | 0.625" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE312G | GY | Е | Steel | 5/8" | 0.625" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE312Q GYE312V | GY | E E | Steel | 5/8" | 0.625" 0.625" | 4/0 Concentric 250 kcmil | | Preferred Preferred | L160 | |
| | | | | | | Concentric | | | | |
| GYE331T | GY | E | Steel | 3/4" | 0.750" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE331V | GY | E | Steel | 3/4" | 0.750" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYE332C | GY | E | Steel | 3/4" | 0.750" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE332G | GY | E | Steel | 3/4" | 0.750" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYE332Q GYJ224L | GY | E | Steel Copper-bonded | 3/4" 1" | 0.750" | 4/0 Concentric 750 kcmil Concentric | 150 or 150PLUSF20 500 or 500PLUSF20 | | L160 L159 | |
| GYJ313Q | GY | J | Steel | 5/8" | 0.625" | 500 kcmil Concentric | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| GYJ333D | GY | J | Steel | 3/4" | 0.750" | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L159 | |
| | | | | | | 33113311113 | 5301 2001 20 | | | |

| Global Part | Mold | Price | Ground Rod | Ground Rod Diameter, | Ground Rod Diameter, | | | Ease of | Handle | Other Accessories |
|-------------|--------|-------|---------------|-------------------------|-------------------------|-------------------------|--------------------------|-----------|--------|----------------------|
| Number | Family | Key | Туре | Nominal | Actual | Conductor Size | Welding Material | Use | Clamp | Required |
| GYJ333Q | GY | J | Steel | 3/4" | 0.750" | 500 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYJ373Q | GY | J | Steel | 1" | 1.000" | 500 kcmil Concentric | 500 or 500PLUSF20 | Preferred | L159 | |
| GYR142C | GY | R | Steel | 1/2" | 0.505" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR142G | GY | R | Steel | 1/2" | 0.505" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR142Q | GY | R | Steel | 1/2" | 0.505" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYR161G | GY | R | Copper-bonded | 5/8" | 0.563" | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 | B1331L x 2 |
| GYR161H | GY | R | Copper-bonded | 5/8" | 0.563" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 x 2 |
| GYR161L | GY | R | Copper-bonded | 5/8" | 0.563" | #4 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYR161T | GY | R | Copper-bonded | 5/8" | 0.563" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYR161V | GY | R | Copper-bonded | 5/8" | 0.563" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYR162C | GY | R | Copper-bonded | 5/8" | 0.563" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR162G | GY | R | Copper-bonded | 5/8" | 0.563" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR162Q | GY | R | Copper-bonded | 5/8" | 0.563" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYR162V | GY | R | Copper-bonded | 5/8" | 0.563" | 250 kcmil Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYR163A | GY | R | Copper-bonded | 5/8" | 0.563" | 300 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GYR163D | GY | R | Copper-bonded | 5/8" | 0.563" | 350 kcmil Concentric | 250 or 250PLUSF20 | Preferred | L160 | |
| GYR181G | GY | R | Copper-bonded | 3/4" | 0.682" | #6 Solid | 90 or 90PLUSF20 | Preferred | L160 | B1331L x 2 |
| GYR181H | GY | R | Copper-bonded | 3/4" | 0.682" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 x 2 |
| GYR181T | GY | R | Copper-bonded | 3/4" | 0.682" | #2 Solid | 90 or 90PLUSF20 | Preferred | L160 | |
| GYR181V | GY | R | Copper-bonded | 3/4" | 0.682" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYR182C | GY | R | Copper-bonded | 3/4" | 0.682" | 1/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR182G | GY | R | Copper-bonded | 3/4" | 0.682" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR182Q | GY | R | Copper-bonded | 3/4" | 0.682" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYR182V | GY | R | Copper-bonded | 3/4" | 0.682" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |
| GYR183D | GY | R | Copper-bonded | 3/4" | 0.682" | 350 kcmil Concentric | 150 x 2 or 300PLUSF20 | Preferred | L160 | |
| GYR312G | GY | R | Steel | 5/8" | 0.625" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR331H | GY | R | Steel | 3/4" | 0.750" | #6 Concentric | 90 or 90PLUSF20 | Preferred | L160 | B112 x 2 |
| GYR331V | GY | R | Steel | 3/4" | 0.750" | #2 Concentric | 90 or 90PLUSF20 | Preferred | L160 | |
| GYR332G | GY | R | Steel | 3/4" | 0.750" | 2/0 Concentric | 115 or 115PLUSF20 | Preferred | L160 | |
| GYR332Q | GY | R | Steel | 3/4" | 0.750" | 4/0 Concentric | 150 or 150PLUSF20 | Preferred | L160 | |
| GYR332V | GY | R | Steel | 3/4" | 0.750" | 250 kcmil Concentric | 200 or 200PLUSF20 | Preferred | L160 | |

GN MOLDS

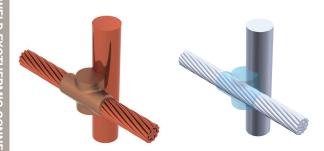

| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material Required | Ease of Use | Handle Clamp Required |
|--------------------------|----------------|-----------|-----------------|---------------------------------------|--------------------------------------|-------------------|------------------------------|----------------|-----------------------------|
| GNR161H | GN | R | Copper-bonded | 5/8" | 0.563" | #6 Concentric | 90 or 90PLUSF20 | Easy | L160 |
| GNR161T | GN | R | Copper-bonded | 5/8" | 0.563" | #2 Solid | 90 or 90PLUSF20 | Easy | L160 |
| GNR161V | GN | R | Copper-bonded | 5/8" | 0.563" | #2 Concentric | 90 or 90PLUSF20 | Easy | L160 |
| GNR162C | GN | R | Copper-bonded | 5/8" | 0.563" | 1/0 Concentric | 115 or 115PLUSF20 | Easy | L160 |
| GNR181H | GN | R | Copper-bonded | 3/4" | 0.682" | #6 Concentric | 90 or 90PLUSF20 | Easy | L160 |
| GNR181T | GN | R | Copper-bonded | 3/4" | 0.682" | #2 Solid | 90 or 90PLUSF20 | Easy | L160 |

GN MOLD KIT




| Global Part Number | Mold Family | Price Key | Ground Rod Type | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Conductor Size | Welding Material Required | Ease of Use | Handle Clamp Required |
|--------------------------|----------------|-----------------|-----------------|---------------------------------------|--------------------------------------|-------------------|------------------------------|----------------|--------------------------|
| K217 | GN | See Kit Pricing | Copper-bonded | 5/8" | 0.560" | #6 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K217R | GN | See Kit Pricing | Copper-bonded | 5/8" | 0.560" | #6 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K218 | GN | See Kit Pricing | Copper-bonded | 5/8" | 0.560" | #4 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K218R | GN | See Kit Pricing | Copper-bonded | 5/8" | 0.560" | #4 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K220 | GN | See Kit Pricing | Copper-bonded | 1/2" | 0.504" | #6 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K220R | GN | See Kit Pricing | Copper-bonded | 1/2" | 0.504" | #6 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K221 | GN | See Kit Pricing | Copper-bonded | 1/2" | 0.504" | #4 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K221R | GN | See Kit Pricing | Copper-bonded | 1/2" | 0.504" | #4 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K222 | GN | See Kit Pricing | Copper-bonded | 3/4" | 0.681" | #6 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K222R | GN | See Kit Pricing | Copper-bonded | 3/4" | 0.681" | #6 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K223 | GN | See Kit Pricing | Copper-bonded | 3/4" | 0.681" | #4 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |
| K223R | GN | See Kit Pricing | Copper-bonded | 3/4" | 0.681" | #4 Solid | 25, Included in Kit | Easy | B399DS, Included in Kit |

CABLE TO CABLE TO GROUND ROD OR OTHER ROUNDS




- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- · Connections are visually inspected

NC MOLDS

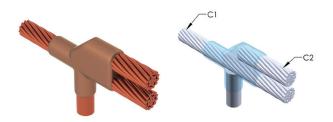

| Global Part Number | Mold family | Price Key | Conductor 1 | Conductor 2 | Ground Rod Size, Nominal | Ground Rod Size Actual | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp |
|-----------------------|----------------|--------------|-------------------------|-------------------------|-----------------------------------|------------------------------|--------------------|------------------------------|----------------|--------------------------|
| NCF222V | NC | F | 250 kcmil Concentric | 250 kcmil Concentric | 1" | 0.914" | Copper- bonded | 200 x 2 or 400PLUSF20 | Preferred | L159, Sold Separately |
| NCF223D | NC | F | 350 kcmil Concentric | 350 kcmil Concentric | 1" | 0.914" | Copper- bonded | 200 x 2 or 400PLUSF20 | Preferred | L159, Sold Separately |
| NCF223Q | NC | F | 500 kcmil Concentric | 500 kcmil Concentric | 1" | 0.914" | Copper- bonded | 250 x 3 or 750PLUSF20 | Preferred | L159, Sold Separately |
| NCF313Q | NC | F | 500 kcmil Concentric | 500 kcmil Concentric | 5/8" | 0.625" | Steel | 200 x 3 or 600PLUSF20 | Preferred | L159 |
| NCF333Q | NC | F | 500 kcmil Concentric | 500 kcmil Concentric | 3/4" | 0.750" | Steel | 200 x 3 or 600PLUSF20 | Preferred | L159 |
| NCR142C | NC | R | 1/0 Concentric | 1/0 Concentric | 1/2" | 0.505" | Steel | 115 or 115PLUSF20 | Preferred | L160 |
| NCR142G | NC | R | 2/0 Concentric | 2/0 Concentric | 1/2" | 0.505" | Steel | 150 or 150PLUSF20 | Preferred | L160 |
| NCR142Q | NC | R | 4/0 Concentric | 4/0 Concentric | 1/2" | 0.505" | Steel | 200 or 200PLUSF20 | Preferred | L160 |
| NCR161T | NC | R | #2 Solid | #2 Solid | 5/8" | 0.563" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR161T1G | NC | R | #2 Solid | #6 Solid | 5/8" | 0.563" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR161V | NC | R | #2 Concentric | #2 Concentric | 5/8" | 0.563" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR161Y | NC | R | #1 Concentric | #1 Concentric | 5/8" | 0.563" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR162C | NC | R | 1/0 Concentric | 1/0 Concentric | 5/8" | 0.563" | Copper- bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NCR162G | NC | R | 2/0 Concentric | 2/0 Concentric | 5/8" | 0.563" | Copper- bonded | 200 or 200PLUSF20 | Preferred | L160 |
| NCR162G2Q | NC | R | 2/0 Concentric | 4/0 Concentric | 5/8" | 0.563" | Copper- bonded | 250 or 250PLUSF20 | Preferred | L160 |
| NCR162Q | NC | R | 4/0 Concentric | 4/0 Concentric | 5/8" | 0.563" | Copper- bonded | 250 or 250PLUSF20 | Preferred | L160 |

| Global Part Number | Mold family | Price Key | Conductor 1 | Conductor 2 | Ground Rod Size, Nominal | Ground Rod Size Actual | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp |
|-----------------------|----------------|--------------|-------------------------|-------------------------|-----------------------------------|------------------------------|--------------------|------------------------------|----------------|-----------------|
| NCR162V | NC | R | 250 kcmil Concentric | 250 kcmil Concentric | 5/8" | 0.563" | Copper- bonded | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| NCR181T | NC | R | #2 Solid | #2 Solid | 3/4" | 0.682" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR181V | NC | R | #2 Concentric | #2 Concentric | 3/4" | 0.682" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR181Y | NC | R | #1 Concentric | #1 Concentric | 3/4" | 0.682" | Copper- bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NCR182C | NC | R | 1/0 Concentric | 1/0 Concentric | 3/4" | 0.682" | Copper- bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NCR182G | NC | R | 2/0 Concentric | 2/0 Concentric | 3/4" | 0.682" | Copper- bonded | 200 or 200PLUSF20 | Preferred | L160 |
| NCR182Q | NC | R | 4/0 Concentric | 4/0 Concentric | 3/4" | 0.682" | Copper- bonded | 250 or 250PLUSF20 | Preferred | L160 |
| NCR182V | NC | R | 250 kcmil Concentric | 250 kcmil Concentric | 3/4" | 0.682" | Copper- bonded | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| NCR221T | NC | R | #2 Solid | #2 Solid | 1" | 0.914" | Copper- bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NCR221V | NC | R | #2 Concentric | #2 Concentric | 1" | 0.914" | Copper- bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NCR221Y | NC | R | #1 Concentric | #1 Concentric | 1" | 0.914" | Copper- bonded | 200 or 200PLUSF20 | Preferred | L160 |
| NCR222C | NC | R | 1/0 Concentric | 1/0 Concentric | 1" | 0.914" | Copper- bonded | 200 or 200PLUSF20 | Preferred | L160 |
| NCR222G | NC | R | 2/0 Concentric | 2/0 Concentric | 1" | 0.914" | Copper- bonded | 250 or 250PLUSF20 | Preferred | L160 |
| NCR222Q | NC | R | 4/0 Concentric | 4/0 Concentric | 1" | 0.914" | Copper- bonded | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| NCR311V | NC | R | #2 Concentric | #2 Concentric | 5/8" | 0.625" | Steel | 115 or 115PLUSF20 | Preferred | L160 |
| NCR312C | NC | R | 1/0 Concentric | 1/0 Concentric | 5/8" | 0.625" | Steel | 150 or 150PLUSF20 | Preferred | L160 |
| NCR312G | NC | R | 2/0 Concentric | 2/0 Concentric | 5/8" | 0.625" | Steel | 200 or 200PLUSF20 | Preferred | L160 |
| NCR312Q | NC | R | 4/0 Concentric | 4/0 Concentric | 5/8" | 0.625" | Steel | 250 or 250PLUSF20 | Preferred | L160 |
| NCR332C | NC | R | 1/0 Concentric | 1/0 Concentric | 3/4" | 0.750" | Steel | 150 or 150PLUSF20 | Preferred | L160 |
| NCR332G | NC | R | 2/0 Concentric | 2/0 Concentric | 3/4" | 0.750" | Steel | 200 or 200PLUSF20 | Preferred | L160 |
| NCR332Q | NC | R | 4/0 Concentric | 4/0 Concentric | 3/4" | 0.750" | Steel | 250 or 250PLUSF20 | Preferred | L160 |
| NCR372Q | NC | R | 4/0 Concentric | 4/0 Concentric | 1" | 1.000" | Steel | 150 x 2 or 300PLUSF20 | Preferred | L160 |

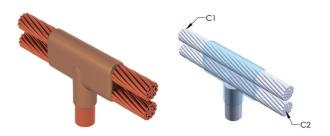

| Global Part Number | Mold family | Price Key | Conductor 1 | Conductor 2 | Ground Rod Size, Nominal | Ground Rod Size Actual | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp |
|-----------------------|----------------|--------------|-------------------------|-------------------------|--------------------------------|---------------------------|--------------------|------------------------------|----------------|-----------------|
| NDF162Q | ND | F | 4/0 Concentric | 4/0 Concentric | 5/8" | 0.563" | Copper-bonded | 150 x 2 or 300PLUSF20 | Preferred | L159 |
| NDF162V | ND | F | 250 kcmil Concentric | 250 kcmil Concentric | 5/8" | 0.563" | Copper-bonded | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| NDF182Q | ND | F | 4/0 Concentric | 4/0 Concentric | 3/4" | 0.682" | Copper-bonded | 150 x 2 or 300PLUSF20 | Preferred | L159 |
| NDF182V | ND | F | 250 kcmil Concentric | 250 kcmil Concentric | 3/4" | 0.682" | Copper-bonded | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| NDF183D | ND | F | 350 kcmil Concentric | 350 kcmil Concentric | 3/4" | 0.682" | Copper-bonded | 500 or 500PLUSF20 | Preferred | L159 |
| NDF183Q | ND | F | 500 kcmil Concentric | 500 kcmil Concentric | 3/4" | 0.682" | Copper-bonded | 250 x 3 or 750PLUSF20 | Preferred | L159 |
| NDF222G | ND | F | 2/0 Concentric | 2/0 Concentric | 1" | 0.914" | Copper-bonded | 150 x 2 or 300PLUSF20 | Preferred | L159 |
| NDF222Q | ND | F | 4/0 Concentric | 4/0 Concentric | 1" | 0.914" | Copper-bonded | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| NDF223Q | ND | F | 500 kcmil Concentric | 500 kcmil Concentric | 1" | 0.914" | Copper-bonded | 500 x 2 or 1000PLUSF20 | Preferred | L159 |
| NDF312Q | ND | F | 4/0 Concentric | 4/0 Concentric | 5/8" | 0.625" | Steel | 150 x 2 or 300PLUSF20 | Preferred | L159 |
| NDF313Q | ND | F | 500 kcmil Concentric | 500 kcmil Concentric | 5/8" | 0.625" | Steel | 250 x 3 or 750PLUSF20 | Preferred | L159 |
| NDF332Q | ND | F | 4/0 Concentric | 4/0 Concentric | 3/4" | 0.750" | Steel | 150 x 2 or 300PLUSF20 | Preferred | L159 |
| NDF372Q | ND | F | 4/0 Concentric | 4/0 Concentric | 1" | 1.000" | Steel | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| NDR141L | ND | R | #4 Concentric | #4 Concentric | 1/2" | 0.505" | Steel | 115 or 115PLUSF20 | Preferred | L160 |
| NDR142C | ND | R | 1/0 Concentric | 1/0 Concentric | 1/2" | 0.505" | Steel | 150 or 150PLUSF20 | Preferred | L160 |
| NDR142G | ND | R | 2/0 Concentric | 2/0 Concentric | 1/2" | 0.505" | Steel | 200 or 200PLUSF20 | Preferred | L160 |
| NDR142Q | ND | R | 4/0 Concentric | 4/0 Concentric | 1/2" | 0.505" | Steel | 250 or 250PLUSF20 | Preferred | L160 |
| NDR161G | ND | R | #6 Solid | #6 Solid | 5/8" | 0.563" | Copper-bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NDR161L | ND | R | #4 Concentric | #4 Concentric | 5/8" | 0.563" | Copper-bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NDR161T | ND | R | #2 Solid | #2 Solid | 5/8" | 0.563" | Copper-bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NDR161V | ND | R | #2 Concentric | #2 Concentric | 5/8" | 0.563" | Copper-bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NDR161Y | ND | R | #1 Concentric | #1 Concentric | 5/8" | 0.563" | Copper-bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NDR162C | ND | R | 1/0 Concentric | 1/0 Concentric | 5/8" | 0.563" | Copper-bonded | 200 or 200PLUSF20 | Preferred | L160 |
| NDR162G | ND | R | 2/0 Concentric | 2/0 Concentric | 5/8" | 0.563" | Copper-bonded | 250 or 250PLUSF20 | Preferred | L160 |
| NDR181H | ND | R | #6 Concentric | #6 Concentric | 3/4" | 0.682" | Copper-bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NDR181L | ND | R | #4 Concentric | #4 Concentric | 3/4" | 0.682" | Copper-bonded | 115 or 115PLUSF20 | Preferred | L160 |
| NDR181T | ND | R | #2 Solid | #2 Solid | 3/4" | 0.682" | Copper-bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NDR181V | ND | R | #2 Concentric | #2 Concentric | 3/4" | 0.682" | Copper-bonded | 150 or 150PLUSF20 | Preferred | L160 |

| Global Part Number | Mold family | Price Key | Conductor 1 | Conductor 2 | Ground Rod Size, Nominal | Ground Rod Size Actual | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp |
|-----------------------|----------------|--------------|----------------|----------------|--------------------------------|---------------------------|--------------------|------------------------------|----------------|-----------------|
| NDR181Y | ND | R | #1 Concentric | #1 Concentric | 3/4" | 0.682" | Copper-bonded | 150 or 150PLUSF20 | Preferred | L160 |
| NDR182C | ND | R | 1/0 Concentric | 1/0 Concentric | 3/4" | 0.682" | Copper-bonded | 200 or 200PLUSF20 | Preferred | L160 |
| NDR182G | ND | R | 2/0 Concentric | 2/0 Concentric | 3/4" | 0.682" | Copper-bonded | 250 or 250PLUSF20 | Preferred | L160 |
| NDR182Q | ND | R | 4/0 Concentric | 4/0 Concentric | 3/4" | 0.682" | Copper-bonded | 150 x 2 or 300PLUSF20 | Preferred | L160 |
| NDR221V | ND | R | #2 Concentric | #2 Concentric | 1" | 0.914" | Copper-bonded | 250 or 250PLUSF20 | Preferred | L160 |
| NDR311V | ND | R | #2 Concentric | #2 Concentric | 5/8" | 0.625" | Steel | 150 or 150PLUSF20 | Preferred | L160 |
| NDR312C | ND | R | 1/0 Concentric | 1/0 Concentric | 5/8" | 0.625" | Steel | 200 or 200PLUSF20 | Preferred | L160 |
| NDR312G | ND | R | 2/0 Concentric | 2/0 Concentric | 5/8" | 0.625" | Steel | 250 or 250PLUSF20 | Preferred | L160 |
| NDR332G | ND | R | 2/0 Concentric | 2/0 Concentric | 3/4" | 0.750" | Steel | 150 x 2 or 300PLUSF20 | Preferred | L160 |

CABLE TO STEEL



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- Connections are visually inspected

HA MOLDS





| Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|----------------|-------------------|---|--|---|---|---|--|---|
| НА | А | #6 Solid | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | B1331L |
| НА | А | #6 Solid | Steel Pipe | 1 1/4" to 2" | 45 or 45PLUSF20 | Preferred | Included with Mold | B1331L |
| НА | Α | #6 Solid | Steel Pipe | 3" to 4" | 45 or 45PLUSF20 | Preferred | Included with Mold | B1331L |
| НА | А | #6 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | B112 |
| НА | А | #6 Concentric | Steel Pipe | 10" to 12" | 45 or 45PLUSF20 | Preferred | Included with Mold | B112 |
| НА | А | #6 Concentric | Steel Pipe | 1 1/4" to 2" | 45 or 45PLUSF20 | Preferred | Included with Mold | B112 |
| НА | Α | #6 Concentric | Steel Pipe | 3" to 4" | 45 or 45PLUSF20 | Preferred | Included with Mold | B112 |
| НА | А | #6 Concentric | Steel Pipe | 6" to 8" | 45 or 45PLUSF20 | Preferred | Included with Mold | B112 |
| | HA HA HA HA HA HA | Family Key HA A | FamilyKeySizeHAA#6 SolidHAA#6 SolidHAA#6 SolidHAA#6 ConcentricHAA#6 ConcentricHAA#6 ConcentricHAA#6 ConcentricHAA#6 Concentric | FamilyKeySizeConnects ToHAA#6 SolidFlat Surface or Steel PipeHAA#6 SolidSteel PipeHAA#6 SolidSteel PipeHAA#6 ConcentricFlat Surface or Steel PipeHAA#6 ConcentricSteel PipeHAA#6 ConcentricSteel PipeHAA#6 ConcentricSteel PipeHAA#6 ConcentricSteel Pipe | FamilyKeySizeConnects ToDiameterHAA#6 SolidFlat Surface or Steel Pipe14" and LargerHAA#6 SolidSteel Pipe1 1/4" to 2"HAA#6 SolidSteel Pipe3" to 4"HAA#6 ConcentricFlat Surface or Steel Pipe14" and LargerHAA#6 ConcentricSteel Pipe10" to 12"HAA#6 ConcentricSteel Pipe1 1/4" to 2"HAA#6 ConcentricSteel Pipe3" to 4" | HA A #6 Solid Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 10" to 12" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 | HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 Preferred HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 2 3" to 4" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 10" to 12" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45 or 45PLUSF20 | HA A #6 Solid Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 1 1/4" to 2" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 10" to 12" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 10" to 12" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 10" to 12" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 11/4" to 2" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 11/4" to 2" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 Preferred Included with Mold HA A #6 Concentric Steel Pipe 3" to 4" 45 or 45PLUSF20 Preferred Included with Mold HA HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 Preferred Included with Mold HA HA A #6 Concentric Steel Pipe 6" to 8" 45 or 45PLUSF20 Preferred Included with Mold HA |

| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|--------------------|-------------------------------|-------------------|------------------------------|-------------|--------------------------|---------------------|
| НАА1К | НА | А | #4 Solid | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1K162C | НА | А | #4 Solid | Steel Pipe | 1 1/4" to 2" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1L | НА | Α | #4 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1L11C | НА | А | #4 Concentric | Steel Pipe | 10" to 12" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1L162C | НА | А | #4 Concentric | Steel Pipe | 1 1/4" to 2" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1L350C | НА | А | #4 Concentric | Steel Pipe | 3" to 4" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1L7C | НА | Α | #4 Concentric | Steel Pipe | 6" to 8" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1T | НА | А | #2 Solid | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1T162C | НА | Α | #2 Solid | Steel Pipe | 1 1/4" to 2" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1T350C | НА | А | #2 Solid | Steel Pipe | 3" to 4" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1T7C | НА | Α | #2 Solid | Steel Pipe | 6" to 8" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1V | НА | А | #2 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1V11C | НА | Α | #2 Concentric | Steel Pipe | 10" to 12" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1V162C | НА | А | #2 Concentric | Steel Pipe | 1 1/4" to 2" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1V350C | НА | Α | #2 Concentric | Steel Pipe | 3" to 4" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1V7C | НА | А | #2 Concentric | Steel Pipe | 6" to 8" | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HAA1Y | НА | А | #1 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | Included with Mold | |
| HAA1Y11C | НА | А | #1 Concentric | Steel Pipe | 10" to 12" | 65 or 65PLUSF20 | Preferred | Included with Mold | |
| HAA1Y325C | НА | А | #1 Concentric | Steel Pipe | 2 1/2" to 4" | 65 or 65PLUSF20 | Preferred | Included with Mold | |
| HAH2C20C | НА | Н | 1/0 Concentric | Steel Pipe | 12" to 28" | 90 or 90PLUSF20 | Preferred | Included with Mold | |
| HAH2C350C | НА | Н | 1/0 Concentric | Steel Pipe | 3" to 4" | 90 or 90PLUSF20 | Preferred | Included with Mold | |
| HAH2C8C | НА | Н | 1/0 Concentric | Steel Pipe | 6" to 10" | 90 or 90PLUSF20 | Preferred | Included with Mold | |
| HAH2G20C | НА | Н | 2/0 Concentric | Steel Pipe | 12" to 28" | 90 or 90PLUSF20 | Preferred | Included with Mold | |
| HAH2G350C | НА | Н | 2/0 Concentric | Steel Pipe | 3" to 4" | 90 or 90PLUSF20 | Preferred | Included with Mold | |
| HAH2G8C | НА | Н | 2/0 Concentric | Steel Pipe | 6" to 10" | 90 or 90PLUSF20 | Preferred | Included with Mold | |
| HAH2Q20C | НА | Н | 4/0 Concentric | Steel Pipe | 12" to 28" | 115 or 115PLUSF20 | Preferred | Included with Mold | |
| HAH2Q350C | НА | Н | 4/0 Concentric | Steel Pipe | 3" to 4" | 115 or 115PLUSF20 | Preferred | Included with Mold | |
| HAH2Q3C | НА | Н | 4/0 Concentric | Steel Pipe | 2" to 4" | 115 or 115PLUSF20 | Preferred | Included with Mold | |
| HAH2Q8C | НА | Н | 4/0 Concentric | Steel Pipe | 6" to 10" | 115 or 115PLUSF20 | Preferred | Included with Mold | |
| HAH9D350C | НА | Н | 7/#6 Copperweld | Steel Pipe | 3" to 4" | 115 or 115PLUSF20 | Preferred | Included with Mold | |
| | | | | | | | | | |

HS MOLDS






| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------------|------------------|---------------------------------|----------------|--------------------------|---------------------|
| HSC1G | HS | С | #6 Solid | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 | B1331L |
| HSC1H | HS | С | #6 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 | B112 |
| HSC1L | HS | С | #4 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| HSC1T | HS | С | #2 Solid | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| HSC1V | HS | С | #2 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| HSC2C | HS | С | 1/0 Concentric | Flat Surface or Steel Pipe | 30" and Larger | 90 or 90PLUSF20 | Preferred | L160 | |
| HSC2G | HS | С | 2/0 Concentric | Flat Surface or Steel Pipe | 30" and Larger | 90 or 90PLUSF20 | Preferred | L160 | |
| HSC2Q | HS | С | 4/0 Concentric | Flat Surface or Steel Pipe | 30" and Larger | 115 or 115PLUSF20 | Preferred | L160 | |
| HSC2V | HS | С | 250 kcmil Concentric | Flat Surface or Steel Pipe | 30" and Larger | 115 or 115PLUSF20 | Preferred | L160 | |

HC MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|--------------------------|----------------|--------------|-------------------|-------------------------------|------------------|---------------------------------|-------------|--------------------------|---------------------|
| HCA1G | HC | А | #6 Solid | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | B1331L x 2 |
| НСА1Н | HC | А | #6 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | B112 x 2 |
| HCA1K | HC | А | #4 Solid | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HCA1L | HC | А | #4 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HCA1T | HC | А | #2 Solid | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HCA1V | HC | А | #2 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 45 or 45PLUSF20 | Preferred | Included with Mold | |
| HCA1Y | HC | А | #1 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | Included with Mold | |

HT MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required |
|--------------------------|----------------|--------------|-------------------------|----------------------------|------------------|------------------------------|-------------|--------------------------|
| HTC1T | HT | С | #2 Solid | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 |
| HTC1V | HT | С | #2 Concentric | Flat Surface or Steel Pipe | 14" and Larger | 65 or 65PLUSF20 | Preferred | L160 |
| HTC2C | HT | С | 1/0 Concentric | Flat Surface or Steel Pipe | 30" and Larger | 90 or 90PLUSF20 | Preferred | L160 |
| HTC2G | HT | С | 2/0 Concentric | Flat Surface or Steel Pipe | 30" and Larger | 115 or 115PLUSF20 | Preferred | L160 |
| HTC2Q | HT | С | 4/0 Concentric | Flat Surface or Steel Pipe | 30" and Larger | 150 or 150PLUSF20 | Preferred | L160 |
| HTC2V | HT | С | 250 kcmil Concentric | Flat Surface or Steel Pipe | 30" and Larger | 150 or 150PLUSF20 | Preferred | L160 |

VS MOLDS





| Global Part | Mold | Price | Conductor | | Pipe | Welding Material | | Handle Clamp | Conductor |
|-------------|--------|-------|---------------|-------------------------------|----------------|------------------|-------------|---------------------|-----------|
| Number | Family | Key | Size | Connects To | Diameter | Required | Ease of Use | Required | Sleeve |
| VSC1G | VS | С | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 or B396 | B1331L |
| VSC1GV3C | VS | С | #6 Solid | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | B1331L |
| VSC1GV5C | VS | С | #6 Solid | Steel Pipe | 4" to 6" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | B1331L |
| VSC1GV8C | VS | С | #6 Solid | Steel Pipe | 6" to 10" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | B1331L |
| VSC1H | VS | С | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 or B396 | B112 |
| VSC1HV21C | VS | С | #6 Concentric | Steel Pipe | 12" to 30" | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| VSC1HV3C | VS | С | #6 Concentric | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | B112 |
| VSC1HV8C | VS | С | #6 Concentric | Steel Pipe | 6" to 10" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | B112 |
| VSC1K | VS | С | #4 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 or B396 | |
| VSC1KV3C | VS | С | #4 Solid | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | |
| VSC1KV5C | VS | С | #4 Solid | Steel Pipe | 4" to 6" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1KV8C | VS | С | #4 Solid | Steel Pipe | 6" to 10" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1L | VS | С | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 or B396 | |
| VSC1LV21C | VS | С | #4 Concentric | Steel Pipe | 12" to 30" | 45 or 45PLUSF20 | Preferred | L160 | |
| VSC1LV3C | VS | С | #4 Concentric | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | |
| VSC1LV5C | VS | С | #4 Concentric | Steel Pipe | 4" to 6" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1LV8C | VS | С | #4 Concentric | Steel Pipe | 6" to 10" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1PV3C | VS | С | #3 Solid | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | |

| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------------|------------------|------------------------------|-------------|-------------------------------|---------------------|
| VSC1T | VS | С | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 or B396 | |
| VSC1TV21C | VS | С | #2 Solid | Steel Pipe | 12" to 30" | 45 or 45PLUSF20 | Preferred | L160 | |
| VSC1TV3C | VS | С | #2 Solid | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | |
| VSC1TV5C | VS | С | #2 Solid | Steel Pipe | 4" to 6" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1TV8C | VS | С | #2 Solid | Steel Pipe | 6" to 10" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1V | VS | С | #2 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 or B396 | |
| VSC1VV21C | VS | С | #2 Concentric | Steel Pipe | 12" to 30" | 45 or 45PLUSF20 | Preferred | L160 | |
| VSC1VV3C | VS | С | #2 Concentric | Steel Pipe | 1-1/2" to 4" | 45 or 45PLUSF20 | Preferred | L160 or B160V | |
| VSC1VV5C | VS | С | #2 Concentric | Steel Pipe | 4" to 6" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1VV8C | VS | С | #2 Concentric | Steel Pipe | 6" to 10" | 45 or 45PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC1Y | VS | С | #1 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | |
| VSC1YV21C | VS | С | #1 Concentric | Steel Pipe | 12" to 30" | 65 or 65PLUSF20 | Preferred | L160 | |
| VSC1YV3C | VS | С | | Steel Pipe | 1-1/2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | |
| VSC1YV5C | VS | С | #1 Concentric | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Preferred | L160. B160V or B158 | |
| VSC1YV8C | VS | С | #1 Concentric | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC2C | VS | С | 1/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | |
| VSC2CV21C | VS | С | 1/0 Concentric | • | 12" to 30" | 90 or 90PLUSF20 | Preferred | L160 | |
| VSC2CV2TC | VS | С | | | 2" to 4" | 90 or 90PLUSF20 | Preferred | L160 or B160V | |
| | | | 1/0 Concentric | · | | | Preferred | | |
| VSC2CV5C | VS | С | 1/0 Concentric | · | 4" to 6" | 90 or 90PLUSF20 | | L160, B160V or B158 | |
| VSC2CV8C | VS | С | 1/0 Concentric | · | 6" to 10" | 90 or 90PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC2G | VS | С | 2/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | |
| VSC2GV21C | VS | С | 2/0 Concentric | Steel Pipe | 12" to 30" | 90 or 90PLUSF20 | Preferred | L160 | |
| VSC2GV3C | VS | С | 2/0 Concentric | Steel Pipe | 2" to 4" | 90 or 90PLUSF20 | Preferred | L160 or B160V | |
| VSC2GV5C | VS | С | 2/0 Concentric | Steel Pipe | 4" to 6" | 90 or 90PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC2GV8C | VS | С | 2/0 Concentric | Steel Pipe | 6" to 10" | 90 or 90PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC2Q | VS | С | 4/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 or B396 | |
| VSC2QV21C | VS | С | 4/0 Concentric | Steel Pipe | 12" to 30" | 115 or 115PLUSF20 | Preferred | L160 | |
| VSC2QV3C | VS | С | 4/0 Concentric | Steel Pipe | 2" to 4" | 115 or 115PLUSF20 | Preferred | L160 or B160V | |
| VSC2QV5C | VS | С | 4/0 Concentric | Steel Pipe | 4" to 6" | 115 or 115PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC2QV8C | VS | С | 4/0 Concentric | Steel Pipe | 6" to 10" | 115 or 115PLUSF20 | Preferred | L160, B160V or B158 | |
| VSC2V | VS | С | 250 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 or B396 | |
| VSC3A | VS | С | 300 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 or 150PLUSF20 | Preferred | L160 or B396 | |
| VSC3D | VS | С | 350 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VSC3H | VS | С | 400 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VSC3Q | VS | С | 500 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VSP1K | VS | Р | #4 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | Mini EZ Attached or B399BM | |
| VSP1T | VS | Р | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | Mini EZ Attached or B399BM | |
| VST1G | VS | Т | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 25 or 25PLUSF20 | Preferred | Mini EZ Attached or B399AM | |
| VST1H | VS | Т | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 25 or 25PLUSF20 | Preferred | Mini EZ Attached or B399AM | |
| VST1L | VS | Т | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 25 or 25PLUSF20 | Preferred | Mini EZ Attached or B399AM | |
| | | | | | | | | | |





| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | ColuEase of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|----------------|-------------------------------|-------------------|---------------------------------|--------------------|--------------------------|---------------------|
| VBC1G | VB | С | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Easy | L160 or B396 | B1331L |
| VBC1H | VB | С | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Easy | L160 or B396 | B112 |
| VBC1HV3C | VB | С | #6 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Easy | L160 and B160V | B112 |
| VBC1K | VB | С | #4 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Easy | L160 or B396 | |
| VBC1KV3C | VB | С | #4 Solid | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Easy | L160 and B160V | |
| VBC1L | VB | С | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Easy | L160 or B396 | |
| VBC1LV21C | VB | С | #4 Concentric | Steel Pipe | 12" to 30" | 65 or 65PLUSF20 | Easy | L160 | |
| VBC1LV3C | VB | С | #4 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Easy | L160 and B160V | |
| VBC1LV5C | VB | С | #4 Concentric | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Easy | L160, B160V or B158 | |
| VBC1LV8C | VB | С | #4 Concentric | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Easy | L160, B160V or B158 | |
| VBC1T | VB | С | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Easy | L160 or B396 | |
| VBC1TV21C | VB | С | #2 Solid | Steel Pipe | 12" to 30" | 65 or 65PLUSF20 | Easy | L160 | |
| VBC1TV3C | VB | С | #2 Solid | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Easy | L160 or B160V | |
| VBC1TV5C | VB | С | #2 Solid | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Easy | L160, B160V or B158 | |
| VBC1TV8C | VB | С | #2 Solid | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Easy | L160, B160V or B158 | |
| VBC1V | VB | С | #2 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Easy | L160 or B396 | |
| VBC1VV21C | VB | С | #2 Concentric | Steel Pipe | 12" to 30" | 65 or 65PLUSF20 | Easy | L160 | |
| VBC1VV3C | VB | С | #2 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Easy | L160 or B160V | |
| VBC1VV5C | VB | С | #2 Concentric | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Easy | L160, B160V or B158 | |
| VBC1VV8C | VB | С | #2 Concentric | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Easy | L160, B160V or B158 | |
| VBC1Y | VB | С | #1 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Easy | L160 or B396 | |
| VBC1YV3C | VB | С | #1 Concentric | Steel Pipe | 2" to 4" | 90 or 90PLUSF20 | Easy | L160 or B160V | |
| VBC2C | VB | С | 1/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Easy | L160 or B396 | |
| VBC2CV21C | VB | С | 1/0 Concentric | Steel Pipe | 12" to 30" | 115 or 115PLUSF20 | Easy | L160 | |
| VBC2CV3C | VB | С | 1/0 Concentric | Steel Pipe | 2" to 4" | 115 or 115PLUSF20 | Easy | L160 or B160V | |
| VBC2CV5C | VB | С | 1/0 Concentric | Steel Pipe | 4" to 6" | 115 or 115PLUSF20 | Easy | L160, B160V or B158 | |
| VBC2CV8C | VB | С | 1/0 Concentric | Steel Pipe | 6" to 10" | 115 or 115PLUSF20 | Easy | L160, B160V or B158 | |
| VBC2G | VB | С | 2/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Easy | L160 or B396 | |

| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | ColuEase of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------------|-------------------|---------------------------------|--------------------|--------------------------|---------------------|
| VBC2GV21C | VB | С | 2/0 Concentric | Steel Pipe | 12" to 30" | 115 or 115PLUSF20 | Easy | L160 | |
| VBC2GV3C | VB | С | 2/0 Concentric | Steel Pipe | 2" to 4" | 115 or 115PLUSF20 | Easy | L160 or B160V | |
| VBC2GV5C | VB | С | 2/0 Concentric | Steel Pipe | 4" to 6" | 115 or 115PLUSF20 | Easy | L160, B160V or B158 | |
| VBC2GV8C | VB | С | 2/0 Concentric | Steel Pipe | 6" to 10" | 115 or 115PLUSF20 | Easy | L160, B160V or B158 | |
| VBC2Q | VB | С | 4/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 or 150PLUSF20 | Easy | L160 or B396 | |
| VBC2QV21C | VB | С | 4/0 Concentric | Steel Pipe | 12" to 30" | 150 or 150PLUSF20 | Easy | L160 | |
| VBC2QV3C | VB | С | 4/0 Concentric | Steel Pipe | 1-1/2" to 4" | 150 or 150PLUSF20 | Easy | L160 or B160V | |
| VBC2QV5C | VB | С | 4/0 Concentric | Steel Pipe | 4" to 6" | 150 or 150PLUSF20 | Easy | L160, B160V or B158 | |
| VBC2QV8C | VB | С | 4/0 Concentric | Steel Pipe | 6" to 10" | 150 or 150PLUSF20 | Easy | L160, B160V or B158 | |
| VBC2V | VB | С | 250 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Easy | L160 or B396 | |
| VBC2VV5C | VB | С | 250 kcmil Concentric | Steel Pipe | 4" to 6" | 200 or 200PLUSF20 | Easy | L160, B160V or B158 | |
| VBC3A | VB | С | 300 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Easy | L160 or B396 | |
| VBC3H | VB | С | 400 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 250 or 250PLUSF20 | Easy | L160 or B396 | |
| VBR3Q | VB | R | 500 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 x 2 or 300PLUSF20 | Easy | L160 or B396 | |

VF MOLDS







| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|----------------|-------------------------------|-------------------|---------------------------------|-------------|--------------------------|---------------------|
| VFC1G | VF | С | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | B1331L |
| VFC1GV3C | VF | С | #6 Solid | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | B1331L |
| VFC1H | VF | С | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | B112 |
| VFC1HV3C | VF | С | #6 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | B112 |
| VFC1K | VF | С | #4 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | |
| VFC1KV3C | VF | С | #4 Solid | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | |
| VFC1L | VF | С | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | |
| VFC1LV21C | VF | С | #4 Concentric | Steel Pipe | 12" to 30" | 65 or 65PLUSF20 | Preferred | L160 | |
| VFC1LV3C | VF | С | #4 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | |
| VFC1LV8C | VF | С | #4 Concentric | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Preferred | L160, B160V or B158 | |

| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------------|-------------------|---------------------------------|-------------|--------------------------|---------------------|
| VFC1T | VF | С | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | |
| VFC1TV21C | VF | С | #2 Solid | Steel Pipe | 12" to 30" | 65 or 65PLUSF20 | Preferred | L160 | |
| VFC1TV3C | VF | С | #2 Solid | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | |
| VFC1TV5C | VF | С | #2 Solid | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Preferred | L160, B160V or B158 | |
| VFC1V | VF | С | #2 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 or B396 | |
| VFC1VV3C | VF | С | #2 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160V | |
| VFC1VV5C | VF | С | #2 Concentric | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Preferred | L160, B160V or B158 | |
| VFC1VV8C | VF | С | #2 Concentric | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Preferred | L160, B160V or B158 | |
| VFC1Y | VF | С | #1 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | |
| VFC2C | VF | С | 1/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 or 150PLUSF20 | Preferred | L160 or B396 | |
| VFC2CV3C | VF | С | 1/0 Concentric | Steel Pipe | 2" to 4" | 150 or 150PLUSF20 | Preferred | L160 or B160V | |
| VFC2CV8C | VF | С | 1/0 Concentric | Steel Pipe | 6" to 10" | 150 or 150PLUSF20 | Preferred | L160, B160V or B158 | |
| VFC2G | VF | С | 2/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 or 150PLUSF20 | Preferred | L160 or B396 | |
| VFC2GV3C | VF | С | 2/0 Concentric | Steel Pipe | 2" to 4" | 150 or 150PLUSF20 | Preferred | L160 or B160V | |
| VFC2GV5C | VF | С | 2/0 Concentric | Steel Pipe | 4" to 6" | 150 or 150PLUSF20 | Preferred | L160, B160V or B158 | |
| VFC2GV8C | VF | С | 2/0 Concentric | Steel Pipe | 6" to 10" | 150 or 150PLUSF20 | Preferred | L160, B160V or B158 | |
| VFF3Q | VF | F | 500 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 x 2 or 400PLUSF20 | Preferred | L159 and B159M | |
| VFR2Q | VF | R | 4/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VFR2QV21C | VF | R | 4/0 Concentric | Steel Pipe | 12" to 30" | 200 or 200PLUSF20 | Preferred | L160 | |
| VFR2QV3C | VF | R | 4/0 Concentric | Steel Pipe | 2" to 4" | 200 or 200PLUSF20 | Preferred | L160 or B160V | |
| VFR2QV5C | VF | R | 4/0 Concentric | Steel Pipe | 4" to 6" | 200 or 200PLUSF20 | Preferred | L160, B160V or B158 | |
| VFR2QV8C | VF | R | 4/0 Concentric | Steel Pipe | 6" to 10" | 200 or 200PLUSF20 | Preferred | L160, B160V or B158 | |
| VFR2V | VF | R | 250 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VFR3A | VF | R | 300 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 250 or 250PLUSF20 | Preferred | L160 or B396 | |
| VFR3D | VF | R | 350 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 x 2 or 300PLUSF20 | Preferred | L160 or B396 | |
| VFR3H | VF | R | 400 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 x 2 or 300PLUSF20 | Preferred | L160 or B396 | |

VG MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|-------------------------------|------------------|------------------------------|-------------|--------------------------|---------------------|
| VGC1G | VG | С | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 | B1331L x 2 |
| VGC1H | VG | С | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 | B112 x 2 |
| VGC1L | VG | С | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 | |
| VGC1T | VG | С | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 | |
| VGC1V | VG | С | #2 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 45 or 45PLUSF20 | Preferred | L160 | |
| VGC1Y | VG | С | #1 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| VGC2C | VG | С | 1/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 | |
| VGC2G | VG | С | 2/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 | |

VT MOLDS







| Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|----------------|--------------------------------------|--------------------------------------|--|--|--|--|---|--|
| VT | С | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | B1331L x 2 |
| VT | С | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | B112 x 2 |
| VT | С | #4 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| VT | С | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| VT | С | #4 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160VT | |
| VT | С | #4 Concentric | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Preferred | L160, B160VT or B158 | |
| VT | С | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| VT | С | #2 Solid | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160VT | |
| VT | С | #2 Solid | Steel Pipe | 4" to 6" | 65 or 65PLUSF20 | Preferred | L160, B160VT or B158 | |
| VT | С | #2 Solid | Steel Pipe | 6" to 10" | 65 or 65PLUSF20 | Preferred | L160, B160VT or B158 | |
| | Family VT | FamilyKeyVTCVTCVTCVTCVTCVTCVTCVTCVTC | FamilyKeyConductor SizeVTC#6 SolidVTC#6 ConcentricVTC#4 SolidVTC#4 ConcentricVTC#4 ConcentricVTC#4 ConcentricVTC#2 SolidVTC#2 SolidVTC#2 Solid | FamilyKeyConductor SizeConnects ToVTC#6 SolidFlat Surface or Steel PipeVTC#6 ConcentricFlat Surface or Steel PipeVTC#4 SolidFlat Surface or Steel PipeVTC#4 ConcentricFlat Surface or Steel PipeVTC#4 ConcentricSteel PipeVTC#4 ConcentricSteel PipeVTC#2 SolidFlat Surface or Steel PipeVTC#2 SolidSteel PipeVTC#2 SolidSteel Pipe | FamilyKeyConductor SizeConnects ToDiameterVTC#6 SolidFlat Surface or Steel Pipe32" and LargerVTC#6 ConcentricFlat Surface or Steel Pipe32" and LargerVTC#4 SolidFlat Surface or Steel Pipe32" and LargerVTC#4 ConcentricFlat Surface or Steel Pipe32" and LargerVTC#4 ConcentricSteel Pipe2" to 4"VTC#4 ConcentricSteel Pipe4" to 6"VTC#2 SolidFlat Surface or Steel Pipe32" and LargerVTC#2 SolidSteel Pipe2" to 4"VTC#2 SolidSteel Pipe2" to 4"VTC#2 SolidSteel Pipe4" to 6" | Mold FamilyPrice FamilyKeyConductor SizeConnects To DiameterMaterial RequiredVTC#6 SolidFlat Surface or Steel Pipe Larger32" and 65 or 65PLUSF20VTC#6 ConcentricFlat Surface or Steel Pipe Larger32" and 65 or 65PLUSF20VTC#4 SolidFlat Surface or Steel Pipe Larger65 PLUSF20VTC#4 ConcentricFlat Surface or Steel Pipe Larger65 or 65PLUSF20VTC#4 ConcentricSteel Pipe Steel Pipe Larger65 or 65PLUSF20VTC#4 ConcentricSteel Pipe Steel Pipe Larger65 or 65PLUSF20VTC#4 ConcentricSteel Pipe Steel Pipe Larger65 or 65PLUSF20VTC#2 SolidFlat Surface or Steel Pipe Larger65 or 65PLUSF20VTC#2 SolidSteel Pipe Steel Pipe Ste | Mold FamilyPrice FamilyKeyConductor SizeConnects ToDiameterRequiredEase of UseVTC#6 SolidFlat Surface or Steel Pipe | Mold KeyPrice FamilyPrice KeyPrice Conductor SizePipe DiameterMaterial RequiredHandle Clamp RequiredVTC#6 SolidFlat Surface or Steel Pipe Or Steel Pipe Or Steel Pipe Larger32" and Larger 65PLUSF20PreferredL160VTC#4 SolidFlat Surface or Steel Pipe Larger65 or 65PLUSF20PreferredL160VTC#4 ConcentricFlat Surface or Steel Pipe Larger65 or 65PLUSF20PreferredL160VTC#4 ConcentricSteel Pipe Larger65 or 65PLUSF20PreferredL160 or B160VTVTC#4 ConcentricSteel Pipe 2" to 4"65 or 65PLUSF20PreferredL160 or B160VTVTC#2 SolidFlat Surface or Steel Pipe 2" to 4"65 or 65PLUSF20PreferredL160, B160VT or B158VTC#2 SolidSteel Pipe 2" to 4"65 or 65PLUSF20PreferredL160 or B160VTVTC#2 SolidSteel Pipe 2" to 4"65 or 65PLUSF20PreferredL160 or B160VTVTC#2 SolidSteel Pipe 4" to 6"65 or 65PLUSF20PreferredL160, B160VT or B158 |

| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------------|-------------------|---------------------------------|-------------|--------------------------|---------------------|
| VTC1V | VT | С | #2 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 65 or 65PLUSF20 | Preferred | L160 | |
| VTC1VV3C | VT | С | #2 Concentric | Steel Pipe | 2" to 4" | 65 or 65PLUSF20 | Preferred | L160 or B160VT | |
| VTC2C | VT | С | 1/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 | |
| VTC2CV3C | VT | С | 1/0 Concentric | Steel Pipe | 2" to 4" | 115 or 115PLUSF20 | Preferred | L160 or B160VT | |
| VTC2G | VT | С | 2/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 | |
| VTC2GV3C | VT | С | 2/0 Concentric | Steel Pipe | 2" to 4" | 115 or 115PLUSF20 | Preferred | L160 or B160VT | |
| VTC2Q | VT | С | 4/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 or 150PLUSF20 | Preferred | L160 | |
| VTC2QV21C | VT | С | 4/0 Concentric | Steel Pipe | 12" to 30" | 150 or 150PLUSF20 | Preferred | L160 | |
| VTC2QV3C | VT | С | 4/0 Concentric | Steel Pipe | 2" to 4" | 150 or 150PLUSF20 | Preferred | L160 or B160VT | |
| VTC2QV5C | VT | С | 4/0 Concentric | Steel Pipe | 4" to 6" | 150 or 150PLUSF20 | Preferred | L160, B160VT or B158 | |
| VTC2V | VT | С | 250 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 150 or 150PLUSF20 | Preferred | L160 | |
| VTD3Q | VT | D | 500 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 500 or 500PLUSF20 | Preferred | L159 | |

VV MOLDS






| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|----------------|-------------------------------|-------------------|---------------------------------|-------------|--------------------------|---------------------|
| VVC1G | VV | С | #6 Solid | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | B1331L x 2 |
| VVC1GV3C | VV | С | #6 Solid | Steel Pipe | 1-1/2" to 4" | 90 or 90PLUSF20 | Preferred | L160 or B160V | B1331L x 2 |
| VVC1H | VV | С | #6 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | B112 x 2 |
| VVC1K | VV | С | #4 Solid | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | |
| VVC1L | VV | С | #4 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 90 or 90PLUSF20 | Preferred | L160 or B396 | |
| VVC1LV3C | VV | С | #4 Concentric | Steel Pipe | 1-1/2" to 4" | 90 or 90PLUSF20 | Preferred | L160 or B160V | |
| VVC1T | VV | С | #2 Solid | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 or B396 | |
| VVC1TV3C | VV | С | #2 Solid | Steel Pipe | 1-1/2" to 4" | 115 or 115PLUSF20 | Preferred | L160 or B160V | |
| VVC1V | VV | С | #2 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 or B396 | |
| VVC1VV21C | VV | С | #2 Concentric | Steel Pipe | 12" to 30" | 115 or 115PLUSF20 | Preferred | L160 | |
| VVC1VV3C | VV | С | #2 Concentric | Steel Pipe | 1-1/2" to 4" | 115 or 115PLUSF20 | Preferred | L160 or B160V | |
| VVC1Y | VV | С | #1 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 115 or 115PLUSF20 | Preferred | L160 or B396 | |

| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Pipe Diameter | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------------|-------------------|---------------------------------|-------------|--------------------------|---------------------|
| VVR2C | VV | R | 1/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VVR2CV3C | VV | R | 1/0 Concentric | Steel Pipe | 2" to 4" | 200 or 200PLUSF20 | Preferred | L160 or B160V | |
| VVR2G | VV | R | 2/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 200 or 200PLUSF20 | Preferred | L160 or B396 | |
| VVR2GV21C | VV | R | 2/0 Concentric | Steel Pipe | 12" to 30" | 200 or 200PLUSF20 | Preferred | L160 | |
| VVR2GV3C | VV | R | 2/0 Concentric | Steel Pipe | 2" to 4" | 200 or 200PLUSF20 | Preferred | L160 or B160V | |
| VVR2GV5C | VV | R | 2/0 Concentric | Steel Pipe | 4" to 6" | 200 or 200PLUSF20 | Preferred | L160, B160V or B158 | |
| VVR2Q | VV | R | 4/0 Concentric | Flat Surface or Steel Pipe | 32" and Larger | 250 or 250PLUSF20 | Preferred | L160 or B396 | |
| VVR2QV21C | VV | R | 4/0 Concentric | Steel Pipe | 12" to 30" | 250 or 250PLUSF20 | Preferred | L160 | |
| VVR2QV3C | VV | R | 4/0 Concentric | Steel Pipe | 2" to 4" | 250 or 250PLUSF20 | Preferred | L160 or B160V | |
| VVR2QV8C | VV | R | 4/0 Concentric | Steel Pipe | 6" to 10" | 250 or 250PLUSF20 | Preferred | L160, B160V or B158 | |
| VVR2V | VV | R | 250 kcmil Concentric | Flat Surface or Steel Pipe | 32" and Larger | 250 or 250PLUSF20 | Preferred | L160 or B396 | |

VN MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Connects To | Welding Material Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|----------------|------------------------------|-------------|--------------------------|---------------------|
| VNC1GLH | VN | С | #6 Solid | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | B1331L |
| VNC1HLH | VN | С | #6 Concentric | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| VNC1HRH | VN | С | #6 Concentric | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| VNC1LLH | VN | С | #4 Concentric | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | |
| VNC1LRH | VN | С | #4 Concentric | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | |
| VNC1TLH | VN | С | #2 Solid | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | |
| VNC1TRH | VN | С | #2 Solid | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | |
| VNC1VLH | VN | С | #2 Concentric | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | |
| VNC1VRH | VN | С | #2 Concentric | Flat Surface | 45 or 45PLUSF20 | Preferred | L160 | |
| VNC2CLH | VN | С | 1/0 Concentric | Flat Surface | 90 or 90PLUSF20 | Preferred | L160 | |
| VNC2CRH | VN | С | 1/0 Concentric | Flat Surface | 90 or 90PLUSF20 | Preferred | L160 | |
| VNC2GLH | VN | С | 2/0 Concentric | Flat Surface | 90 or 90PLUSF20 | Preferred | L160 | |
| VNC2GRH | VN | С | 2/0 Concentric | Flat Surface | 90 or 90PLUSF20 | Preferred | L160 | |
| VNC2LLH | VN | С | 3/0 Concentric | Flat Surface | 115 or 115PLUSF20 | Preferred | L160 | |
| VNC2LRH | VN | С | 3/0 Concentric | Flat Surface | 115 or 115PLUSF20 | Preferred | L160 | |
| VNC2QLH | VN | С | 4/0 Concentric | Flat Surface | 115 or 115PLUSF20 | Preferred | L160 | |
| VNC2QRH | VN | С | 4/0 Concentric | Flat Surface | 115 or 115PLUSF20 | Preferred | L160 | |
| VNC2VLH | VN | С | 250 kcmil Concentric | Flat Surface | 115 or 115PLUSF20 | Preferred | L160 | |
| VNC2VRH | VN | С | 250 kcmil Concentric | Flat Surface | 115 or 115PLUSF20 | Preferred | L160 | |

CABLE TO LUG OR BUSBAR



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power
- Installers can be easily trained to make Cadweld Exothermic Connections
- Connections are visually inspected


GL MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Lug / Busbar Size | Welding Material Required | Ease of Use | Handle Clamp | Conductor Sleeve |
|-----------------------|----------------|--------------|----------------------|-------------------|------------------------------|-------------|---------------------------|---------------------|
| GLCCE1G | GL | С | #6 Solid | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | B1331L |
| GLCCE1H | GL | С | #6 Concentric | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | B112 |
| GLCCE1K | GL | С | #4 Solid | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | DIIZ |
| GLCCE1L | GL | С | #4 Concentric | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | |
| GLCCE1T | GL | С | #2 Solid | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | |
| GLCCE1V | GL | С | #2 Concentric | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | |
| GLCCE1Y | GL | С | #1 Concentric | 1/8" x 1" | 32 or 32PLUSF20 | Preferred | L160 | |
| GLCCE2C | GL | C | 1/0 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| GLCCE2G | GL | С | 2/0 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| GLCCE2Q | GL | C | 4/0 Concentric | 1/8" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| GLCDE1H | GL | С | #6 Concentric | 3/16" x 1" | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| GLCDE2C | GL | С | 1/0 Concentric | 3/16" x 1" | 45 or 45PLUSF20 | Preferred | L160 | 5112 |
| GLCDE2G | GL | С | 2/0 Concentric | 3/16" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| GLCDE2Q | GL | С | 4/0 Concentric | 3/16" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| GLCDE2V | GL | С | 250 kcmil Concentric | 3/16" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| GLCEE2Q | GL | С | 4/0 Concentric | 1/4" × 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| GLCEE2V | GL | С | 250 kcmil Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| GLCEE3A | GL | С | 300 kcmil Concentric | 1/4" × 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| GLCEE3D | GL | С | 350 kcmil Concentric | 1/4" × 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| GLCEG1V | GL | С | #2 Concentric | 1/4" x 1 1/2" | 90 or 90PLUSF20 | Preferred | L160 | |
| GLCEG2C | GL | С | 1/0 Concentric | 1/4" x 1 1/2" | 115 or 115PLUSF20 | Preferred | L160 | |
| GLCEG2G | GL | С | 2/0 Concentric | 1/4" x 1 1/2" | 115 or 115PLUSF20 | Preferred | L160 | |
| GLCEG2Q | GL | С | 4/0 Concentric | 1/4" x 1 1/2" | 115 or 115PLUSF20 | Preferred | L160 | |
| GLCEG2V | GL | С | 250 kcmil Concentric | 1/4" x 1 1/2" | 115 or 115PLUSF20 | Preferred | L160 | |
| GLCEG3H | GL | С | 400 kcmil Concentric | 1/4" x 1 1/2" | 150 or 150PLUSF20 | Preferred | L160 | |
| GLCEG3Q | GL | С | 500 kcmil Concentric | 1/4" x 1 1/2" | 150 or 150PLUSF20 | Preferred | L160 | |
| GLPCC1T | GL | Р | #2 Solid | 1/8" x 5/8" | 25 or 25PLUSF20 | Preferred | B399B Mini EZ Attached | |

LA MOLDS

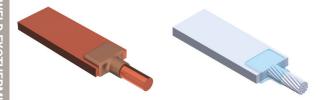


| Global Part Number | Mold Family | Price Key | Conductor Size | Lug / Busbar Size | Welding Material Required | Ease of Use | Handle Clamp required | Conductor Sleeve |
|-----------------------|----------------|--------------|----------------|---------------------|------------------------------|-------------|-----------------------------|---------------------|
| LAC1GCE | LA | С | #6 Solid | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | B1331L |
| LAC1GEE | LA | С | #6 Solid | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | B1331L |
| LAC1HCE | LA | С | #6 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| LAC1HEE | LA | С | #6 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | B112 |
| LAC1HEG | LA | С | #6 Concentric | 1/4" x 1 1/2" | 65 or 65PLUSF20 | Preferred | L160 | B112 |
| LAC1KCE | LA | С | #4 Solid | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1KEE | LA | С | #4 Solid | 1/4" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1LCE | LA | С | #4 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1LEE | LA | С | #4 Concentric | 1/4" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1LEG | LA | С | #4 Concentric | 1/4" x 1 1/2" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1TCE | LA | С | #2 Solid | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1TDE | LA | С | #2 Solid | 3/16" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1TEE | LA | С | #2 Solid | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC1TEG | LA | С | #2 Solid | 1/4" x 1 1/2" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC1TEK | LA | С | #2 Solid | 1/4" x 3" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC1VCE | LA | С | #2 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1VDE | LA | С | #2 Concentric | 3/16" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC1VEE | LA | С | #2 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC1VEG | LA | С | #2 Concentric | 1/4" x 1 1/2" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC1YCE | LA | С | #1 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC2C002 | LA | С | 1/0 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2CCE | LA | С | 1/0 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LAC2CDE | LA | С | 1/0 Concentric | 3/16" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2CEE | LA | С | 1/0 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2CEG | LA | С | 1/0 Concentric | 1/4" x 1 1/2" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2CEK | LA | С | 1/0 Concentric | 1/4" x 3" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2G002 | LA | С | 2/0 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2GCE | LA | С | 2/0 Concentric | 1/8" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2GCEW | LA | С | 2/0 Concentric | 1/8" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2GDE | LA | С | 2/0 Concentric | 3/16" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2GEE | LA | С | 2/0 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2GEEW | LA | С | 2/0 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2GEG | LA | С | 2/0 Concentric | 1/4" x 1 1/2" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2Q002 | LA | С | 4/0 Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2QCE | LA | С | 4/0 Concentric | 1/8" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2QCEW | LA | С | 4/0 Concentric | 1/8" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LAC2QDE | LA | С | 4/0 Concentric | 3/16" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2QEE | LA | С | 4/0 Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |

| LAC2QEG LAC2QEGW LAC2QEH | LA LA LA LA LA | C C C | 4/0 Concentric 4/0 Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | 1460 | |
|--------------------------------|----------------------------|-------------|---|---------------------|--------------------------|-----------|---------------------------|------|
| LAC2QEGW LAC2QEH | LA LA LA | С | | | | Preferred | L160 | |
| LAC2QEH | LA LA | | 4/0.00000000000000000000000000000000000 | 1/4" x 1 1/2" | 90 or 90PLUSF20 | Preferred | L160 | |
| | LA | С | 4/0 Concentric | 1/4" x 1 1/2" | 90 or 90PLUSF20 | Preferred | L160 | |
| 1 A C C C E L IVA/ | | | 4/0 Concentric | 1/4" x 2" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2QEHW | LA | С | 4/0 Concentric | 1/4" x 2" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2QEK | | С | 4/0 Concentric | 1/4" x 3" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2QGG | LA | С | 4/0 Concentric | 3/8" x 1 1/2" | 115 or 115PLUSF20 | Preferred | L160 | |
| LAC2QGH | LA | С | 4/0 Concentric | 3/8" x 2" | 115 or 115PLUSF20 | Preferred | L160 | |
| LAC2QGHW | LA | С | 4/0 Concentric | 3/8" x 2" | 115 or 115PLUSF20 | Preferred | L160 | |
| LAC2QGK | LA | С | 4/0 Concentric | 3/8" x 3" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LAC2QJK | LA | С | 4/0 Concentric | 1/2" x 3" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LAC2VDE | LA | С | 250 kcmil Concentric | 3/16" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2VEE | LA | С | 250 kcmil Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2VEG | LA | С | 250 kcmil Concentric | 1/4" x 1 1/2" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2VEH | LA | С | 250 kcmil Concentric | 1/4" x 2" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC2VEK | LA | С | 250 kcmil Concentric | 1/4" x 3" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC3AEE | LA | С | 300 kcmil Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC3AEEW | LA | С | 300 kcmil Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| | LA | С | 300 kcmil Concentric | 1/4" x 1 1/2" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC3AEGW | LA | С | 300 kcmil Concentric | 1/4" x 1 1/2" | 90 or 90PLUSF20 | Preferred | L160 | |
| LAC3AEH | LA | С | 300 kcmil Concentric | 1/4" × 2" | 90 or 90PLUSF20 | Preferred | L160 | |
| | LA | С | 300 kcmil Concentric | 1/4" x 3" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| | LA | С | 300 kcmil Concentric | 1/2" x 3" and wider | 250 or 250PLUSF20 | Preferred | L160 | |
| LAC3DEE | LA | С | 350 kcmil Concentric | 1/4" × 1" | 115 or 115PLUSF20 | Preferred | L160 | |
| | LA | С | 350 kcmil Concentric | 1/4" x 1" | 115 or 115PLUSF20 | Preferred | L160 | |
| LAC3DEG | LA | С | 350 kcmil Concentric | 1/4" x 1 1/2" | 115 or 115PLUSF20 | Preferred | L160 | |
| | LA | С | 350 kcmil Concentric | 1/4" × 2" | 115 or 115PLUSF20 | Preferred | L160 | |
| | LA | С | 350 kcmil Concentric | 1/4" x 3" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| | LA | С | 400 kcmil Concentric | 1/4" × 1" | 115 or 115PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/4" × 1" | 150 or 150PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/4" x 1" | 150 or 150PLUSF20 | Preferred | L160 | |
| LAC3QEG | LA | С | 500 kcmil Concentric | 1/4" x 1 1/2" | 200 or 200PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/4" x 1 1/2" | 200 or 200PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/4" × 2" | 200 or 200PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/4" x 3" and wider | 200 or 200PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/4" x 3" and wider | 200 or 200PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 3/8" x 1 1/2" | 200 or 200PLUSF20 | Preferred | L160 | |
| | LA | С | 500 kcmil Concentric | 1/2" x 2" | 250 or 250PLUSF20 | Preferred | L160 | |
| | LA | С | 750 kcmil Concentric | 3/8" x 1 1/2" | 150 x 2 or 300PLUSF20 | Preferred | L160 | |
| LAD4LJK | LA | D | 750 kcmil Concentric | 1/2" x 3" | 200 x 2 or 400PLUSF20 | Preferred | L159 | |
| LAD4YJK | LA | D | 1000 kcmil Concentric | 1/2" x 3" | 500 or 500PLUSF20 | Preferred | L159 | |
| LAT1HAA | LA | Т | #6 Concentric | 1/16" x 1/2" | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | B112 |
| LAT1LAA | LA | Т | #4 Concentric | 1/16" x 1/2" | 25 or 25PLUSF20 | Preferred | B399A Mini EZ Attached | |

LJ MOLDS






| Global Part Number | Mold Family | Price Key | Conductor Size | Lug / Busbar Size | Welding Material Required | Ease of Use | Handle Clamp | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|--------------------------|------------------------------|-------------|--------------|---------------------|
| LJCAG1G | LJ | С | #6 Solid | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | B1331L |
| LJCAG1H | LJ | С | #6 Concentric | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| LJCAG1K | LJ | С | #4 Solid | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCAG1T | LJ | С | #2 Solid | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCAG1V | LJ | С | #2 Concentric | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCAG1Y | LJ | С | #1 Concentric | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCAG2C | LJ | С | 1/0 Concentric | 1/16" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCAG2G | LJ | С | 2/0 Concentric | 1/16" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCAG2Q | LJ | С | 4/0 Concentric | 1/16" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCCE1G | LJ | С | #6 Solid | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | B1331L |
| LJCCE1T | LJ | С | #2 Solid | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCCE1V | LJ | С | #2 Concentric | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCCE2C | LJ | С | 1/0 Concentric | 1/8" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCCE2G | LJ | С | 2/0 Concentric | 1/8" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCCE2Q | LJ | С | 4/0 Concentric | 1/8" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCCG1G | LJ | С | #6 Solid | 1/8" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | B1331L |
| LJCCG1H | LJ | С | #6 Concentric | 1/8" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | B112 |
| LJCCG1L | LJ | С | #4 Concentric | 1/8" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCCG1T | LJ | С | #2 Solid | 1/8" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCCG1V | LJ | С | #2 Concentric | 1/8" x 1 1/2" and wider | 45 or 45PLUSF20 | Preferred | L160 | |
| LJCCG2C | LJ | С | 1/0 Concentric | 1/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCCG2G | LJ | С | 2/0 Concentric | 1/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCCG2Q | LJ | С | 4/0 Concentric | 1/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCDG1T | LJ | С | #2 Solid | 3/16" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCED2G | LJ | С | 2/0 Concentric | 1/4" x 3/4" | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEE1T | LJ | С | #2 Solid | 1/4" × 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEE1V | LJ | С | #2 Concentric | 1/4" x 1" | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEE2Q | LJ | С | 4/0 Concentric | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEE3Q | LJ | С | 500 kcmil Concentric | 1/4" x 1" | 200 or 200PLUSF20 | Preferred | L160 | |
| LJCEF2Q | LJ | С | 4/0 Concentric | 1/4" x 1 1/4" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEG1G | LJ | С | #6 Solid | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | B1331L |
| LJCEG1H | LJ | С | #6 Concentric | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | B112 |
| LJCEG1K | LJ | С | #4 Solid | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEG1L | LJ | С | #4 Concentric | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEG1T | LJ | С | #2 Solid | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEG1TL | LJ | С | #2 Solid | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEG1V | LJ | С | #2 Concentric | 1/4" x 1 1/2" and wider | 65 or 65PLUSF20 | Preferred | L160 | |
| LJCEG1X | LJ | С | #1 Solid | 1/4" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |

| Global Part Number | Mold Family | Price Key | Conductor Size | Lug / Busbar Size | Welding Material Required | Ease of Use | Handle Clamp required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------------|-------------------------|------------------------------|-------------|--------------------------|---------------------|
| LJCEG1Y | LJ | С | #1 Concentric | 1/4" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEG2C | LJ | С | 1/0 Concentric | 1/4" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEG2G | LJ | С | 2/0 Concentric | 1/4" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEG2Q | LJ | С | 4/0 Concentric | 1/4" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCEG2V | LJ | С | 250 kcmil Concentric | 1/4" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCEG3A | LJ | С | 300 kcmil Concentric | 1/4" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCEG3D | LJ | С | 350 kcmil Concentric | 1/4" x 1 1/2" and wider | 150 or 150PLUSF20 | Preferred | L160 | |
| LJCEG3Q | LJ | С | 500 kcmil Concentric | 1/4" x 1 1/2" and wider | 200 or 200PLUSF20 | Preferred | L160 | |
| LJCEG3X | LJ | С | 600 kcmil Concentric | 1/4" x 1 1/2" and wider | 250 or 250PLUSF20 | Preferred | L160 | |
| LJCEG4L | LJ | С | 750 kcmil Concentric | 1/4" x 1 1/2" and wider | 150 x 2 or 300PLUSF20 | Preferred | L160 | |
| LJCGG1L | LJ | С | #4 Concentric | 3/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCGG1T | LJ | С | #2 Solid | 3/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCGG1V | LJ | С | #2 Concentric | 3/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCGG2C | LJ | С | 1/0 Concentric | 3/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCGG2G | LJ | С | 2/0 Concentric | 3/8" x 1 1/2" and wider | 90 or 90PLUSF20 | Preferred | L160 | |
| LJCGG2Q | LJ | С | 4/0 Concentric | 3/8" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCGG2V | LJ | С | 250 kcmil Concentric | 3/8" x 1 1/2" and wider | 150 or 150PLUSF20 | Preferred | L160 | |
| LJCGG3D | LJ | С | 350 kcmil Concentric | 3/8" x 1 1/2" and wider | 200 or 200PLUSF20 | Preferred | L160 | |
| LJCGG3Q | LJ | С | 500 kcmil Concentric | 3/8" x 1 1/2" and wider | 250 or 250PLUSF20 | Preferred | L160 | |
| LJCGG4L | LJ | С | 750 kcmil Concentric | 3/8" x 1 1/2" and wider | 150 x 2 or 300PLUSF20 | Preferred | L160 | |
| LJCJG1T | LJ | С | #2 Solid | 1/2" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCJG1V | LJ | С | #2 Concentric | 1/2" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCJG2C | LJ | С | 1/0 Concentric | 1/2" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCJG2G | LJ | С | 2/0 Concentric | 1/2" x 1 1/2" and wider | 115 or 115PLUSF20 | Preferred | L160 | |
| LJCJG2Q | LJ | С | 4/0 Concentric | 1/2" x 1 1/2" and wider | 150 or 150PLUSF20 | Preferred | L160 | |
| LJCJG2V | LJ | С | 250 kcmil Concentric | 1/2" x 1 1/2" and wider | 200 or 200PLUSF20 | Preferred | L160 | |
| LJCJG3A | LJ | С | 300 kcmil Concentric | 1/2" x 1 1/2" and wider | 200 or 200PLUSF20 | Preferred | L160 | |
| LJCJG3Q | LJ | С | 500 kcmil Concentric | 1/2" x 1 1/2" and wider | 150 x 2 or 300PLUSF20 | Preferred | L160 | |
| LJCLG2Q | LJ | С | 4/0 Concentric | 3/4" x 1 1/2" and wider | 200 or 200PLUSF20 | Preferred | L160 | |


LQ MOLDS





| LQEEH1T LQ E #2 Solid 1/4" x 2" and wider 250 or 250PLUSF20 Easy L160 LQEEH1V LQ E #2 Concentric 1/4" x 2" and wider 250 or 250PLUSF20 Easy L160 LQEH1V LQ E #2 Concentric 3/8" x 2" and wider 250 or 250PLUSF20 Easy L160 LQJEH2CM LQ J 1/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2G LQ J 2/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2G LQ J 4/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH2QM LQ J 4/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH2V LQ J 250 kcmill Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 350 kcmill Concentric 1/4" x 2" and wider 500 or 500PLUSF20 | Global Part Number | Mold Family | Price Key | Conductor Size | Lug / Busbar Size | Welding Material Required | Ease of Use | Handle Clamp required |
|--|-----------------------|----------------|--------------|----------------------|---------------------|---------------------------|-------------|--------------------------|
| LQEGHTV LQ E #2 Concentric 3/8" x 2" and wider 250 or 250PLUSF20 Easy L160 LQJEH2C LQ J 1/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2CM LQ J 1/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2G LQ J 2/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH2QM LQ J 4/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 350 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3A LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 5 | | • | • | #2 Solid | . | | Easy | • |
| LQJEH2C LQ J 1/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2CM LQ J 1/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L160 LQJEH2G LQ J 2/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2Q LQ J 4/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH2VW LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3D LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH2A LQ J 500 kcmil Concentric 1/4" x 2" and wider < | LQEEH1V | LQ | Е | #2 Concentric | 1/4" x 2" and wider | 250 or 250PLUSF20 | Easy | L160 |
| LQJEH2CM LQ J 1/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L160 LQJEH2G LQ J 2/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2Q LQ J 4/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 350 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider | LQEGH1V | LQ | Е | #2 Concentric | 3/8" x 2" and wider | 250 or 250PLUSF20 | Easy | L160 |
| LQJEH2G LQ J 2/0 Concentric 1/4" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJEH2Q LQ J 4/0 Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3D LQ J 350 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3A LQ J 600 kcmil Concentric 1/4" x 2" and wider | LQJEH2C | LQ | J | 1/0 Concentric | 1/4" x 2" and wider | 200 x 2 or 400PLUSF20 | Easy | L159 |
| LQJEH2Q LQ J 4/0 Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH2QM LQ J 4/0 Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L160 LQJEH2V LQ J 250 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3A LQ J 300 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3D LQ J 350 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3X LQ J 600 kcmil Concentric 1/4* x 2* and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4* x 2* and wider | LQJEH2CM | LQ | J | 1/0 Concentric | 1/4" x 2" and wider | 200 x 2 or 400PLUSF20 | Easy | L160 |
| LQJEH2QM LQ J 4/0 Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L160 LQJEH2V LQ J 250 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH2VM LQ J 250 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 300 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3D LQ J 350 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4* x 2* and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4* x 2* and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 3/8* x 2* and wider | LQJEH2G | LQ | J | 2/0 Concentric | 1/4" x 2" and wider | 200 x 2 or 400PLUSF20 | Easy | L159 |
| LQJEH2V LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider </td <td>LQJEH2Q</td> <td>LQ</td> <td>J</td> <td>4/0 Concentric</td> <td>1/4" x 2" and wider</td> <td>500 or 500PLUSF20</td> <td>Easy</td> <td>L159</td> | LQJEH2Q | LQ | J | 4/0 Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJEH2VM LQ J 250 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3D LQ J 350 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider <td>LQJEH2QM</td> <td>LQ</td> <td>J</td> <td>4/0 Concentric</td> <td>1/4" x 2" and wider</td> <td>500 or 500PLUSF20</td> <td>Easy</td> <td>L160</td> | LQJEH2QM | LQ | J | 4/0 Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L160 |
| LQJEH3A LQ J 300 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3D LQ J 350 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider | LQJEH2V | LQ | J | 250 kcmil Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJEH3D LQ J 350 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider | LQJEH2VM | LQ | J | 250 kcmil Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L160 |
| LQJEH3Q LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJEH3QM LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 500 kcmil Concentric 3/8" x 2" and wider | LQJEH3A | LQ | J | 300 kcmil Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJEH3QM LQ J 500 kcmil Concentric 1/4" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider | LQJEH3D | LQ | J | 350 kcmil Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJEH3X LQ J 600 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2G LQ J 4/0 Concentric 1/2" x 2" and wider | LQJEH3Q | LQ | J | 500 kcmil Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJEH4L LQ J 750 kcmil Concentric 1/4" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2G LQ J 4/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 | LQJEH3QM | LQ | J | 500 kcmil Concentric | 1/4" x 2" and wider | 500 or 500PLUSF20 | Easy | L160 |
| LQJGH2C LQ J 1/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2QM LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJEH3X | LQ | J | 600 kcmil Concentric | 1/4" x 2" and wider | 200 x 3 or 600PLUSF20 | Easy | L159 |
| LQJGH2G LQ J 2/0 Concentric 3/8" x 2" and wider 200 x 2 or 400PLUSF20 Easy L159 LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 4/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJEH4L | LQ | J | 750 kcmil Concentric | 1/4" x 2" and wider | 200 x 3 or 600PLUSF20 | Easy | L159 |
| LQJGH2Q LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH2C | LQ | J | 1/0 Concentric | 3/8" x 2" and wider | 200 x 2 or 400PLUSF20 | Easy | L159 |
| LQJGH2QM LQ J 4/0 Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L160 LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH2G | LQ | J | 2/0 Concentric | 3/8" x 2" and wider | 200 x 2 or 400PLUSF20 | Easy | L159 |
| LQJGH2V LQ J 250 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH2Q | LQ | J | 4/0 Concentric | 3/8" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJGH3Q LQ J 500 kcmil Concentric 3/8" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH2QM | LQ | J | 4/0 Concentric | 3/8" x 2" and wider | 500 or 500PLUSF20 | Easy | L160 |
| LQJGH4L LQ J 750 kcmil Concentric 3/8" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH2V | LQ | J | 250 kcmil Concentric | 3/8" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJJH2G LQ J 2/0 Concentric 1/2" x 2" and wider 500 or 500PLUSF20 Easy L159 LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH3Q | LQ | J | 500 kcmil Concentric | 3/8" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJJH2Q LQ J 4/0 Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJGH4L | LQ | J | 750 kcmil Concentric | 3/8" x 2" and wider | 200 x 3 or 600PLUSF20 | Easy | L159 |
| | LQJJH2G | LQ | J | 2/0 Concentric | 1/2" x 2" and wider | 500 or 500PLUSF20 | Easy | L159 |
| LQJJH2V LQ J 250 kcmil Concentric 1/2" x 2" and wider 200 x 3 or 600PLUSF20 Easy L159 | LQJJH2Q | LQ | J | 4/0 Concentric | 1/2" x 2" and wider | 200 x 3 or 600PLUSF20 | Easy | L159 |
| | LQJJH2V | LQ | J | 250 kcmil Concentric | 1/2" x 2" and wider | 200 x 3 or 600PLUSF20 | Easy | L159 |


BUSBAR TO BUSBAR



- Forms a permanent, low resistance connection
- · Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- · Connections are visually inspected

BA MOLDS





| Global Part Number | Mold Family | Price Key | Busbar Size 1 | Busbar Size 2 | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|----------------|--------------|---------------|---------------|---------------------------|-------------|--------------------------|
| BACCA | ВА | С | 1/8" x 1/2" | 1/8" x 1/2" | 45 or 45PLUSF20 | Preferred | L160 |
| BACCE | ВА | С | 1/8" x 1" | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 |
| BACDE | ВА | С | 3/16" x 1" | 3/16" x 1" | 65 or 65PLUSF20 | Preferred | L160 |
| BACEE | ВА | С | 1/4" × 1" | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 |
| BACEH | ВА | С | 1/4" x 2" | 1/4" x 2" | 200 or 200PLUSF20 | Preferred | L160 |
| BADEK | ВА | D | 1/4" x 3" | 1/4" x 3" | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| BADEM | ВА | D | 1/4" × 4" | 1/4" x 4" | 500 or 500PLUSF20 | Preferred | L159 |
| BADGK | ВА | D | 3/8" x 3" | 3/8" x 3" | 500 or 500PLUSF20 | Preferred | L159 |


BB MOLDS






| Global Part Number | Mold Family | Price Key | Busbar Size 1 | Busbar Size 2 | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|-------------|-----------|---------------|---------------|------------------------------|-------------|--------------------------|
| BBCCE | ВВ | С | 1/8" x 1" | 1/8" x 1" | 90 or 90PLUSF20 | Easy | L160 |
| BBCEF | ВВ | С | 1/4" x 1 1/4" | 1/4" x 1 1/4" | 150 or 150PLUSF20 | Easy | L160 |
| BBCEG | BB | С | 1/4" x 1 1/2" | 1/4" x 1 1/2" | 150 or 150PLUSF20 | Easy | L160 |
| BBDEHEH | BB | D | 1/4" x 2" | 1/4" × 2" | 250 or 250PLUSF20 | Easy | L159 |
| BBFEK | ВВ | F | 1/4" x 3" | 1/4" x 3" | 200 x 2 or 400PLUSF20 | Easy | L159 |

BM MOLDS




| Global Part Number | Mold Family | Price Key | Busbar Size 1 | Busbar Size 2 | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|-------------|-----------|---------------------|---------------|---------------------------|-------------|--------------------------|
| BMCCECE | ВМ | С | 1/8" x 1" | 1/8" x 1" | 90 or 90PLUSF20 | Easy | L160 |
| BMCCGCG | ВМ | С | 1/8" x 1/2" | 1/8" x 1/2" | 90 or 90PLUSF20 | Easy | L160 |
| BMCDEDE | BM | С | 3/16" x 1" | 3/16" x 1" | 90 or 90PLUSF20 | Easy | L160 |
| BMDCHCH | BM | D | 1/8" x 2" | 1/8" x 2" | 250 or 250PLUSF20 | Easy | L159 |
| BMDEKEK | ВМ | D | 1/4" x 3" and wider | 1/4" x 3" | 200 x 2 or 400PLUSF20 | Easy | L159 |
| BMKEMEM | BM | K | 1/4" x 4" and wider | 1/4" × 4" | 200 x 3 or 600PLUSF20 | Easy | Frame Included |

BQ MOLDS

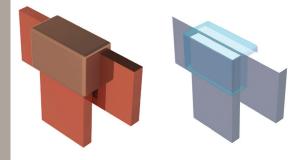

| Global Part Number | Mold Family | Price Key | Busbar Size 1 | Busbar Size 2 | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|-------------|-----------|---------------------|---------------|------------------------------|-------------|--------------------------|
| BQDEHEH | BQ | D | 1/4" x 2" and wider | 1/4" × 2" | 200 x 2 or 400PLUSF20 | Preferred | L159 |
| BQDEKEK | BQ | D | 1/4" x 3" | 1/4" x 3" | 200 x 2 or 400PLUSF20 | Preferred | L159 |





| Global Part Number | Mold Family | Price Key | Busbar Size 1 | Busbar Size 2 | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|----------------|--------------|---------------|---------------------|------------------------------|-------------|--------------------------|
| EPCCE | EP | С | 1/8" x 1" | 1/8" x 1" | 45 or 45PLUSF20 | Preferred | L160 |
| EPCCH | EP | С | 1/8" x 2" | 1/8" x 2" and wider | 90 or 90PLUSF20 | Preferred | L160 |
| EPCCK | EP | С | 1/8" × 3" | 1/8" x 3" and wider | 200 or 200PLUSF20 | Preferred | L160 |
| EPCEE | EP | С | 1/4" x 1" | 1/4" x 1" | 90 or 90PLUSF20 | Preferred | L160 |
| EPCEH | EP | С | 1/4" x 2" | 1/4" x 2" and wider | 200 or 200PLUSF20 | Preferred | L160 |
| EPDCM | EP | D | 1/8" x 4" | 1/8" x 4" and wider | 150 x 2 or 300PLUSF20 | Preferred | L159 |
| EPDEM | EP | D | 1/4" × 4" | 1/4" x 4" and wider | 500 or 500PLUSF20 | Preferred | L159 |
| EPDGM | EP | D | 3/8" x 4" | 3/8" x 4" and wider | 200 x 3 or 600PLUSF20 | Preferred | L159 |

LUG TO BUSBAR OR STEEL



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- · Connections are visually inspected


BW MOLDS






| Global Part Number | Mold family | Price Key | Lug/Busbar Size | Connects To | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|----------------|--------------|-----------------|---------------|------------------------------|-------------|--------------------------|
| BWCCG | BW | С | 1/8" x 1 1/2" | Steel Surface | 150 or 150PLUSF20 | Preferred | L160 |
| BWCDE | BW | С | 3/16" x 1" | Steel Surface | 90 or 90PLUSF20 | Preferred | L160 |
| BWCDG | BW | С | 3/16" x 1/2" | Steel Surface | 150 or 150PLUSF20 | Preferred | L160 |
| BWCEF | BW | С | 1/4" x 1 1/4" | Steel Surface | 200 or 200PLUSF20 | Preferred | L160 |
| BWDJH | BW | D | 1/2" x 2" | Steel Surface | 500 or 500PLUSF20 | Preferred | L160 |


CC MOLDS






| Global Part Number | Mold family | Price Key | Lug/Busbar Size | Connects To | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|----------------|--------------|------------------------|---------------|------------------------------|-------------|--------------------------|
| CCCEH | CC | С | 1/4" x 2" and wider | Steel Surface | 150 x 2 or 300PLUSF20 | Preferred | L160 |

CF MOLDS





| Global Part Number | Mold family | Price Key | Lug/Busbar Size | Connects To | Welding Material Required | Ease of Use | Handle Clamp Required |
|-----------------------|----------------|--------------|------------------------|---------------|------------------------------|-------------|--------------------------|
| CFCDELH | CF | С | 3/16" x 1" | Steel Surface | 150 or 150PLUSF20 | Easy | L160 |
| CFDEHRH | CF | D | 1/4" x 2" and wider | Steel Surface | 150 x 2 or 300PLUSF20 | Easy | L160 |

CABLE TO REBAR



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- Connections are visually inspected

RR MOLDS

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|--------------------------|----------------|--------------|-------------------|----------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RRA521H | RR | А | #4 | #6 Concentric | 25 or 25PLUSF20 | B143B | Preferred | | B112 |
| RRA521K | RR | Α | #4 | #4 Solid | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA521L | RR | Α | #4 | #4 Concentric | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA521T | RR | Α | #4 | #2 Solid | 45 or 45PLUSF20 | B143A | Preferred | | |
| RRA521V | RR | Α | #4 | #2 Concentric | 45 or 45PLUSF20 | B143A | Preferred | | |
| RRA521Y | RR | Α | #4 | #1 Concentric | 65 or 65PLUSF20 | B143A | Preferred | | |
| RRA531D | RR | Α | #5 | #8 Solid | 25 or 25PLUSF20 | B143B | Preferred | | B1331K |
| RRA531G | RR | Α | #5 | #6 Solid | 25 or 25PLUSF20 | B143B | Preferred | | B1331L |
| RRA531H | RR | А | #5 | #6 Concentric | 25 or 25PLUSF20 | B143B | Preferred | | B112 |
| RRA531K | RR | Α | #5 | #4 Solid | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA531L | RR | Α | #5 | #4 Concentric | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA531T | RR | А | #5 | #2 Solid | 45 or 45PLUSF20 | B143A | Preferred | | |
| RRA531V | RR | А | #5 | #2 Concentric | 45 or 45PLUSF20 | B143A | Preferred | | |
| RRA531Y | RR | А | #5 | #1 Concentric | 65 or 65PLUSF20 | B143A | Preferred | | |
| RRA541G | RR | Α | #6 | #6 Solid | 25 or 25PLUSF20 | B143B | Preferred | | B1331L |
| RRA541H | RR | Α | #6 | #6 Concentric | 25 or 25PLUSF20 | B143B | Preferred | | B112 |
| RRA541L | RR | Α | #6 | #4 Concentric | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA541T | RR | Α | #6 | #2 Solid | 45 or 45PLUSF20 | B143B | Preferred | | |
| | | | | | | | | | |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|--------------------------|----------------|--------------|-------------------|----------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RRA541V | RR | А | #6 | #2 Concentric | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA541Y | RR | Α | #6 | #1 Concentric | 65 or 65PLUSF20 | B143B | Preferred | | |
| RRA551L | RR | А | #7 | #4 Concentric | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA551T | RR | А | #7 | #2 Solid | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA551V | RR | Α | #7 | #2 Concentric | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA561L | RR | А | #8 | #4 Concentric | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA561T | RR | Α | #8 | #2 Solid | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA561V | RR | Α | #8 | #2 Concentric | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA561Y | RR | Α | #8 | #1 Concentric | 65 or 65PLUSF20 | B143B | Preferred | | |
| RRA571T | RR | Α | #9 | #2 Solid | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA571V | RR | Α | #9 | #2 Concentric | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRH562C | RR | Н | #8 | 1/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH562G | RR | Н | #8 | 2/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH562L | RR | Н | #8 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH562Q | RR | Н | #8 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH562V | RR | Н | #8 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RRH572C | RR | Н | #9 | 1/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH572G | RR | Н | #9 | 2/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH572L | RR | Н | #9 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH572Q | RR | Н | #9 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH572V | RR | Н | #9 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RRH582C | RR | Н | #10 | 1/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH582G | RR | Н | #10 | 2/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH582L | RR | Н | #10 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH582Q | RR | Н | #10 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH582V | RR | Н | #10 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RRH592C | RR | Н | #11 | 1/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH592G | RR | Н | #11 | 2/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH592L | RR | Н | #11 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH592Q | RR | Н | #11 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH592V | RR | Н | #11 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RRA581H | RR | А | #10 | #6 Concentric | 25 or 25PLUSF20 | B143B | Preferred | | B112 |
| RRA581T | RR | Α | #10 | #2 Solid | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA581V | RR | Α | #10 | #2 Concentric | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA591H | RR | Α | #11 | #6 Concentric | 25 or 25PLUSF20 | B143B | Preferred | | B112 |
| RRA591L | RR | А | #11 | #4 Concentric | 32 or 32PLUSF20 | B143B | Preferred | | |
| RRA591T | RR | Α | #11 | #2 Solid | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRA591V | RR | А | #11 | #2 Concentric | 45 or 45PLUSF20 | B143B | Preferred | | |
| RRC511H | RR | С | #3 | #6 Concentric | 25 or 25PLUSF20 | | Preferred | L160 | |
| RRC511L | RR | С | #3 | #4 Concentric | 32 or 32PLUSF20 | | Preferred | L160 | |
| RRC511T | RR | С | #3 | #2 Solid | 45 or 45PLUSF20 | | Preferred | L160 | |
| RRC511V | RR | С | #3 | #2 Concentric | 45 or 45PLUSF20 | | Preferred | L160 | |
| RRC512C | RR | С | #3 | 1/0 Concentric | 90 or 90PLUSF20 | | Preferred | L160 | |
| RRC512G | RR | С | #3 | 2/0 Concentric | 90 or 90PLUSF20 | | Preferred | L160 | |
| RRC512L | RR | С | #3 | 3/0 Concentric | 115 or 115PLUSF20 | | Preferred | L160 | |
| | | | | | | | | | |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|--------------------------|----------------|--------------|-------------------|----------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RRC512V | RR | С | #3 | 250 kcmil Concentric | 150 or 150PLUSF20 | | Preferred | L160 | |
| RRC522C | RR | С | #4 | 1/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RRC522G | RR | С | #4 | 2/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RRC522L | RR | С | #4 | 3/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RRC522Q | RR | С | #4 | 4/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RRC522V | RR | С | #4 | 250 kcmil Concentric | 150 or 150PLUSF20 | B141A | Preferred | L160 | |
| RRC532C | RR | С | #5 | 1/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RRC532G | RR | С | #5 | 2/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RRC532L | RR | С | #5 | 3/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RRC532Q | RR | С | #5 | 4/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RRC532V | RR | С | #5 | 250 kcmil Concentric | 150 or 150PLUSF20 | B141A | Preferred | L160 | |
| RRH542G | RR | Н | #6 | 2/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH542L | RR | Н | #6 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH542Q | RR | Н | #6 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH542V | RR | Н | #6 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RRH552C | RR | Н | #7 | 1/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH552G | RR | Н | #7 | 2/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH552L | RR | Н | #7 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH552Q | RR | Н | #7 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH552V | RR | Н | #7 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RRH602L | RR | Н | #14 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH602Q | RR | Н | #14 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH612C | RR | Н | #18 | 1/0 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RRH612L | RR | Н | #18 | 3/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RRH612Q | RR | Н | #18 | 4/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |

RD MOLDS





| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|----------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RDC511G | RD | С | #3 | #6 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | B1331L |
| RDC511H | RD | С | #3 | #6 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | B112 |
| RDC511K | RD | С | #3 | #4 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC511L | RD | С | #3 | #4 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC511T | RD | С | #3 | #2 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC521G | RD | С | #4 | #6 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | B1331L |
| RDC521H | RD | С | #4 | #6 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | B112 |
| RDC521K | RD | С | #4 | #4 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC521L | RD | С | #4 | #4 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC521T | RD | С | #4 | #2 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC521V | RD | С | #4 | #2 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RDC531G | RD | С | #5 | #6 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | B1331L |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|-------------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RDC531H | RD | С | #5 | #6 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | B112 |
| RDC531K | RD | С | #5 | #4 Solid | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC531L | RD | С | #5 | #4 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RDC531T | RD | С | #5 | #2 Solid | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RDC531V | RD | С | #5 | #2 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RDH541H | RD | Н | #6 | #6 Concentric | 65 or 65PLUSF20 | B144C | Preferred | | B112 |
| RDH541L | RD | Н | #6 | #4 Concentric | 65 or 65PLUSF20 | B144C | Preferred | | |
| RDH541T | RD | Н | #6 | #2 Solid | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH541V | RD | Н | #6 | #2 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH542C | RD | Н | #6 | 1/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH542G | RD | Н | #6 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH542Q | RD | Н | #6 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH542V | RD | Н | #6 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH551G | RD | Н | #7 | #6 Solid | 65 or 65PLUSF20 | B144C | Preferred | | B1331L |
| RDH551H | RD | Н | #7 | #6 Concentric | 65 or 65PLUSF20 | B144C | Preferred | | B112 |
| RDH551L | RD | Н | #7 | #4 Concentric | 65 or 65PLUSF20 | B144C | Preferred | | |
| RDH551T | RD | Н | #7 | #2 Solid | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH551V | RD | Н | #7 | #2 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH552C | RD | Н | #7 | 1/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH552G | RD | Н | #7 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH552Q | RD | Н | #7 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH552V | RD | Н | #7 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH561L | RD | Н | #8 | #4 Concentric | 65 or 65PLUSF20 | B144C | Preferred | | |
| RDH561T | RD | Н | #8 | #2 Solid | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH561V | RD | Н | #8 | #2 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH561Y | RD | Н | #8 | #1 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH562C | RD | Н | #8 | 1/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH562G | RD | Н | #8 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH562Q | RD | Н | #8 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH562V | RD | Н | #8 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH571T | RD | Н | #9 | #2 Solid | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH571V | RD | Н | #9 | #2 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH572C | RD | Н | #9 | 1/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH572G | RD | Н | #9 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH572Q | RD | Н | #9 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH572V | RD | Н | #9 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH581T | RD | Н | #10 | #2 Solid | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH581V | RD | Н | #10 | #2 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH582C | RD | Н | #10 | 1/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH582G | RD | Н | #10 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH582Q | RD | Н | #10 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH582V | RD | Н | #10 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH591V | RD | Н | #11 | #2 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH591Y | RD | Н | #11 | #1 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |
| RDH591Y | RD | Н | #11 | #1 Concentric | 90 or 90PLUSF20 | B144C | Preferred | | |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|-------------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RDH592C | RD | Н | #11 | 1/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH592G | RD | Н | #11 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH592Q | RD | Н | #11 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH592V | RD | Н | #11 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH602G | RD | Н | #14 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH602Q | RD | Н | #14 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDH612G | RD | Н | #18 | 2/0 Concentric | 115 or 115PLUSF20 | B144C | Preferred | | |
| RDH612Q | RD | Н | #18 | 4/0 Concentric | 150 or 150PLUSF20 | B144C | Preferred | | |
| RDM512G | RD | М | #3 | 2/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | | |
| RDM512Q | RD | М | #3 | 4/0 Concentric | 150 or 150PLUSF20 | B141A | Preferred | | |
| RDM522C | RD | М | #4 | 1/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | | |
| RDM522G | RD | М | #4 | 2/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | | |
| RDM522Q | RD | М | #4 | 4/0 Concentric | 150 or 150PLUSF20 | B141A | Preferred | | |
| RDM522V | RD | М | #4 | 250 kcmil Concentric | 150 or 150PLUSF20 | B141A | Preferred | | |
| RDM532C | RD | М | #5 | 1/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | | |
| RDM532G | RD | М | #5 | 2/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | | |
| RDM532Q | RD | М | #5 | 4/0 Concentric | 150 or 150PLUSF20 | B141A | Preferred | | |
| RDM532V | RD | М | #5 | 250 kcmil Concentric | 150 or 150PLUSF20 | B141A | Preferred | | |

RC MOLDS





| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|----------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RCE511H | RC | E | #3 | #6 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | B112 |
| RCE511L | RC | Е | #3 | #4 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE511T | RC | Е | #3 | #2 Solid | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE511V | RC | Е | #3 | #2 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE512C | RC | Е | #3 | 1/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RCE512G | RC | Е | #3 | 2/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RCE512Q | RC | Е | #3 | 4/0 Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RCE521G | RC | Е | #4 | #6 Solid | 90 or 90PLUSF20 | B140A | Preferred | L160 | B1331L |
| RCE521H | RC | Е | #4 | #6 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | B112 |
| RCE521L | RC | Е | #4 | #4 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE521T | RC | Е | #4 | #2 Solid | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE521V | RC | Е | #4 | #2 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE521Y | RC | Е | #4 | #1 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RCE522C | RC | Е | #4 | 1/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| | | | | | | | | | |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|----------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RCE522G | RC | Е | #4 | 2/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RCE522Q | RC | Е | #4 | 4/0 Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RCE522V | RC | Е | #4 | 250 kcmil Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RCE531G | RC | Е | #5 | #6 Solid | 90 or 90PLUSF20 | B140A | Preferred | L160 | B1331L |
| RCE531H | RC | Е | #5 | #6 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | B112 |
| RCE531L | RC | Е | #5 | #4 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE531T | RC | Е | #5 | #2 Solid | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE531V | RC | Е | #5 | #2 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RCE532C | RC | Е | #5 | 1/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RCE532G | RC | Е | #5 | 2/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RCE532Q | RC | Е | #5 | 4/0 Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RCE532V | RC | Е | #5 | 250 kcmil Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RCE541H | RC | Е | #6 | #6 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | B112 |
| RCE541L | RC | Е | #6 | #4 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE541T | RC | Е | #6 | #2 Solid | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE541V | RC | Е | #6 | #2 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE542C | RC | Е | #6 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE542G | RC | Е | #6 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE542Q | RC | Е | #6 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE551H | RC | Е | #7 | #6 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | B112 |
| RCE551L | RC | Е | #7 | #4 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE551T | RC | Е | #7 | #2 Solid | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE551V | RC | Е | #7 | #2 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE552C | RC | Е | #7 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE552G | RC | Е | #7 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE552Q | RC | Е | #7 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE561H | RC | Е | #8 | #6 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | B112 |
| RCE561K | RC | Е | #8 | #4 Solid | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE561T | RC | Е | #8 | #2 Solid | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE561V | RC | Е | #8 | #2 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE562C | RC | Е | #8 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE562G | RC | Е | #8 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE562Q | RC | Е | #8 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE571T | RC | Е | #9 | #2 Solid | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE571V | RC | Е | #9 | #2 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE572C | RC | Е | #9 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE572G | RC | Е | #9 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE572Q | RC | Е | #9 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE581V | RC | Е | #10 | #2 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE582C | RC | Е | #10 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE582G | RC | E | #10 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE582Q | RC | Е | #10 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE591G | RC | Е | #11 | #6 Solid | 90 or 90PLUSF20 | B144B | Preferred | L160 | B1331L |
| RCE591V | RC | Е | #11 | #2 Concentric | 90 or 90PLUSF20 | B144B | Preferred | L160 | |
| RCE591Y | RC | Е | #11 | #1 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE592C | RC | Е | #11 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| | | | | | | | | | |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|----------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RCE592G | RC | Е | #11 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE592Q | RC | Е | #11 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE602G | RC | Е | #14 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RCE602Q | RC | Е | #14 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RCE612G | RC | Е | #18 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |

RH MOLDS





| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|-------------------|------------------------------|-------------------------------|-------------|--------------------------|---------------------|
| RHC512C | RH | С | #3 | 1/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC512Q | RH | С | #3 | 4/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RHC521H | RH | С | #4 | #6 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | B112 |
| RHC521L | RH | С | #4 | #4 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RHC521V | RH | С | #4 | #2 Concentric | 65 or 65PLUSF20 | B141A | Preferred | L160 | |
| RHC522C | RH | С | #4 | 1/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC522G | RH | С | #4 | 2/0 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC522Q | RH | С | #4 | 4/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RHC531H | RH | С | #5 | #6 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | B112 |
| RHC531L | RH | С | #5 | #4 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC531T | RH | С | #5 | #2 Solid | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC531V | RH | С | #5 | #2 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC532C | RH | С | #5 | 1/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RHC532G | RH | С | #5 | 2/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RHC532Q | RH | С | #5 | 4/0 Concentric | 150 or 150PLUSF20 | B141A | Preferred | L160 | |
| RHC541L | RH | С | #6 | #4 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC541V | RH | С | #6 | #2 Concentric | 90 or 90PLUSF20 | B141A | Preferred | L160 | |
| RHC542C | RH | С | #6 | 1/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RHC542G | RH | С | #6 | 2/0 Concentric | 115 or 115PLUSF20 | B141A | Preferred | L160 | |
| RHC542Q | RH | С | #6 | 4/0 Concentric | 150 or 150PLUSF20 | B141A | Preferred | L160 | |

RJ MOLDS





| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|-------------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RJC522C | RJ | С | #4 | 1/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RJC522G | RJ | С | #4 | 2/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RJC522Q | RJ | С | #4 | 4/0 Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RJC522V | RJ | С | #4 | 250 kcmil Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RJC531H | RJ | С | #5 | #6 Concentric | 45 or 45PLUSF20 | B140A | Preferred | L160 | B112 |
| RJC531K | RJ | С | #5 | #4 Solid | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC531L | RJ | С | #5 | #4 Concentric | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC531T | RJ | С | #5 | #2 Solid | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC531V | RJ | С | #5 | #2 Concentric | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC531Y | RJ | С | #5 | #1 Concentric | 90 or 90PLUSF20 | B140A | Preferred | L160 | |
| RJC532C | RJ | С | #5 | 1/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RJC532G | RJ | С | #5 | 2/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RJC532Q | RJ | С | #5 | 4/0 Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RJC532V | RJ | С | #5 | 250 kcmil Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RJC541H | RJ | С | #6 | #6 Concentric | 45 or 45PLUSF20 | B140A | Preferred | L160 | B112 |
| RJC541L | RJ | С | #6 | #4 Concentric | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC541T | RJ | С | #6 | #2 Solid | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC541V | RJ | С | #6 | #2 Concentric | 65 or 65PLUSF20 | B140A | Preferred | L160 | |
| RJC542C | RJ | С | #6 | 1/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RJC542G | RJ | С | #6 | 2/0 Concentric | 115 or 115PLUSF20 | B140A | Preferred | L160 | |
| RJC542Q | RJ | С | #6 | 4/0 Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RJC542V | RJ | С | #6 | 250 kcmil Concentric | 150 or 150PLUSF20 | B140A | Preferred | L160 | |
| RJE551L | RJ | Е | #7 | #4 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE551T | RJ | Е | #7 | #2 Solid | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE551V | RJ | Е | #7 | #2 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE552C | RJ | Е | #7 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE552G | RJ | E | #7 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE552Q | RJ | Е | #7 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE561L | RJ | E | #8 | #4 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE561T | RJ | Е | #8 | #2 Solid | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE561V | RJ | E | #8 | #2 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE562C | RJ | Е | #8 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE562Q | RJ | Е | #8 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE562V | RJ | Е | #8 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE571L | RJ | E | #9 | #4 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |

| Global Part Number | Mold Family | Price Key | Rebar Size, US | Conductor Size | Welding Material Required | Shim / Batting Required | Ease of Use | Handle Clamp Required | Conductor Sleeve |
|-----------------------|----------------|--------------|-------------------|-------------------------|------------------------------|-------------------------------|-------------|-----------------------------|---------------------|
| RJE571T | RJ | Е | #9 | #2 Solid | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE571V | RJ | Е | #9 | #2 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE572C | RJ | Е | #9 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE572G | RJ | Е | #9 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE572Q | RJ | Е | #9 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE572V | RJ | Е | #9 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE581T | RJ | Е | #10 | #2 Solid | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE581V | RJ | Е | #10 | #2 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE582C | RJ | Е | #10 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE582G | RJ | Е | #10 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE582Q | RJ | Е | #10 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE582V | RJ | Е | #10 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE591V | RJ | Е | #11 | #2 Concentric | 65 or 65PLUSF20 | B144A | Preferred | L160 | |
| RJE592C | RJ | Е | #11 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE592G | RJ | Е | #11 | 2/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |
| RJE592Q | RJ | Е | #11 | 4/0 Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE592V | RJ | Е | #11 | 250 kcmil Concentric | 150 or 150PLUSF20 | B144B | Preferred | L160 | |
| RJE602C | RJ | Е | #14 | 1/0 Concentric | 115 or 115PLUSF20 | B144B | Preferred | L160 | |

CABLE TO GROUND RECEPTACLE OR GROUND PLATE



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- · Connections are visually inspected

RA MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Ground Receptacle | Welding Material Required | Ease of Use | Handle Clamp |
|--------------------------|----------------|--------------|----------------|---------------------------|------------------------------|----------------|--------------|
| RAC2C | RA | С | 1/0 Concentric | B165 Grounding Receptacle | 150 or 150PLUSF20 | Preferred | L160 |
| RAC2G | RA | С | 2/0 Concentric | B165 Grounding Receptacle | 150 or 150PLUSF20 | Preferred | L160 |
| RAC2Q | RA | С | 4/0 Concentric | B165 Grounding Receptacle | 150 or 150PLUSF20 | Preferred | L160 |

RB MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Ground Receptacle | Welding Material Required | Ease of Use | Handle Clamp |
|--------------------------|----------------|--------------|----------------|---------------------------|---------------------------|----------------|--------------|
| RBC2G | RB | С | 2/0 Concentric | B165 Grounding Receptacle | 150 or 150PLUSF20 | Preferred | L160 |
| RBC2Q | RB | С | 4/0 Concentric | B165 Grounding Receptacle | 200 or 200PLUSF20 | Preferred | L160 |

GB/GR MOLDS





| Global Part Number | Mold Family | Price Key | Conductor Size | Ground Plate/ Grounding Receptacle | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp |
|--------------------------|----------------|--------------|-------------------|--|---------------------------------------|--------------------------------------|--------------------|---------------------------------|----------------|-----------------|
| GBJGR 162CR2 | GB/GR | J | 1/0 Concentric | B166 Grounding Receptacle | 5/8" | 0.563" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 162QR1 | GB/GR | J | 4/0 Concentric | B165 Grounding Receptacle | 5/8" | 0.563" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 182CR1 | GB/GR | J | 1/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 182CR2 | GB/GR | J | 1/0 Concentric | B166 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 182GR1 | GB/GR | J | 2/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 182GR2 | GB/GR | J | 2/0 Concentric | B166 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 182QR1 | GB/GR | J | 4/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGR 332GR1 | GB/GR | J | 2/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.750" | Steel | 200 x 2 or 200PLUSF20 | Preferred | L159 |





| Global Part Number | Mold Family | Price Key | Conductor Size | Ground Plate/ Grounding Receptacle | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Ground Rod Type | Welding Material Required | Ease of Use | Handle Clamp |
|--------------------------|----------------|--------------|-------------------|--|---------------------------------------|--------------------------------------|--------------------|---------------------------------|----------------|-----------------|
| GBJGT 162GR1 | GB/GT | J | 2/0 Concentric | B165 Grounding Receptacle | 5/8" | 0.563" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGT 182CR1 | GB/GT | J | 1/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGT 182CR3 | GB/GT | J | 1/0 Concentric | B167 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGT 182GR1 | GB/GT | J | 2/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGT 182QR1 | GB/GT | J | 4/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.682" | Copper- bonded | 200 x 2 or 200PLUSF20 | Preferred | L159 |
| GBJGT 332GR1 | GB/GT | J | 2/0 Concentric | B165 Grounding Receptacle | 3/4" | 0.750" | Steel | 200 x 2 or 200PLUSF20 | Preferred | L159 |


COPPER OR STEEL STUD TO STEEL SURFACE



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- · Connections are visually inspected

HV MOLDS





| Global Part Number | Mold Family | Price Key | Stud Type | Connects To | Welding Material Required | Ease of Use | Handle Clamp required |
|-----------------------|-------------|--------------|------------------|---------------|------------------------------|-------------|--------------------------|
| HVC12 | HV | С | 3/8" Steel Stud | Steel Surface | 45 or 45PLUSF20 | Easy | L160 |
| HVC12CU | HV | С | 3/8" Copper Stud | Steel Surface | 90 or 90PLUSF20 | Easy | L160 |
| HVC14CU | HV | С | 1/2" Copper Stud | Steel Surface | 115 or 115PLUSF20 | Easy | L160 |
| HVC18 | HV | С | 3/4" Steel Stud | Steel Surface | 150 or 150PLUSF20 | Easy | L160 |
| HVC31CU | HV | С | 5/8" Copper Stud | Steel Surface | 150 or 150PLUSF20 | Easy | L160 |
| HVD37CU | HV | D | 1" Copper Stud | Steel Surface | 200 x 2 or 400PLUSF20 | Easy | L159 |

HX MOLDS





| Global Part Number | Mold Family | Price Key | Stud Type | Connects To | Welding Material Required | Ease of Use | Handle Clamp required |
|-----------------------|-------------|--------------|------------------|---------------|------------------------------|-------------|--------------------------|
| HXC10 | HX | С | 1/4" Steel Stud | Steel Surface | 25 or 25PLUSF20 | Easy | L160 |
| HXC12 | HX | С | 3/8" Steel Stud | Steel Surface | 45 or 45PLUSF20 | Easy | L160 |
| HXC14 | HX | С | 1/2" Steel Stud | Steel Surface | 65 or 65PLUSF20 | Easy | L160 |
| HXC14CU | HX | С | 1/2" Copper Stud | Steel Surface | 115 or 115PLUSF20 | Easy | L160 |
| HXC16 | HX | С | 5/8" Steel Stud | Steel Surface | 90 or 90PLUSF20 | Easy | L160 |
| HXC22 | HX | С | 1" Steel Stud | Steel Surface | 150 x 2 or 300PLUSF20 | Easy | L160 |

Additional Molds

The Cadweld connection styles presented in the additional mold section are "non-catalog" offerings.

These connection styles and others are available when standard connections do not meet the installation requirements. Connections are identified with an ease of use and a mold split identifier. Ease of use categories include: preferred, easy, difficult and most difficult.

If possible, efforts should be made to use preferred or easy to use connection styles.

Mold split identifies molds that have a vertically split crucible (V). Those without a designation do not have a vertically split crucible. For additional information and/or assistance in ordering non-catalog connection styles, please contact your nVent ERICO representative.

CABLE TO CABLE



sv Ease of Use: DIFFICULT Mold Split: ∨



SC Ease of Use: PREFERRED Mold Split: -



Ease of Use: DIFFICULT Mold Split: ∨



PΡ Ease of Use: PREFERRED Mold Split: -



PR Ease of Use: EASY Mold Split: ∨



PΑ Ease of Use: EASY Mold Split: -



PB Ease of Use: DIFFICULT Mold Split: ∨



PD Ease of Use: DIFFICULT Mold Split: ∨



TV Ease of Use: DIFFICULT Mold Split: ∨



TL Ease of Use: DIFFICULT Mold Split: ∨



Ease of Use: DIFFICULT Mold Split: ∨



Ease of Use: DIFFICULT Mold Split: -



Ease of Use: DIFFICULT Mold Split: ∨




YR Ease of Use: EASY Mold Split: ⊢



YC Ease of Use: DIFFICULT Mold Split: ∨



YD Ease of Use: DIFFICULT Mold Split: ∨



Ease of Use: DIFFICULT Mold Split: ∨



XG Ease of Use: DIFFICULT Mold Split: -

CABLE TO GROUND RODS



Ease of Use: PREFERRED $\textbf{Mold Split:} \ \lor$



GD Ease of Use: DIFFICULT Mold Split: ∨



GC Ease of Use: DIFFICULT Mold Split: ∨



G۷ Ease of Use: PREFERRED Mold Split: ∨



GS Ease of Use: PREFERRED $\textbf{Mold Split:} \ \lor$



GQ Ease of Use: EASY Mold Split: ∨



DQ Ease of Use: PREFERRED Mold Split: ∨



GW Ease of Use: EASY Mold Split: ∨



GP Ease of Use: DIFFICULT Mold Split: ∨



GG Ease of Use: PREFERRED Mold Split: -



GH Ease of Use: DIFFICULT $\textbf{Mold Split:} \ \lor$



GX Ease of Use: DIFFICULT $\textbf{Mold Split:} \ \lor$



Ease of Use: PREFERRED Mold Split: -

STUDS TO STEEL SURFACE



GM Ease of Use: EASY Mold Split: ∨

CABLE TO STEEL



Ease of Use: PREFERRED Mold Split: ∨



Ease of Use: PREFERRED $\textbf{Mold Split:} \ \lor$

Ease of Use: PREFERRED Mold Split: ∨



НΧ Ease of Use: PREFERRED Mold Split: ∨



RG Ease of Use: PREFERRED Mold Split: ∨



Ease of Use: EASY $\textbf{Mold Split:} \ \lor$



RE Ease of Use: EASY Mold Split: ∨



RW Ease of Use: EASY $\textbf{Mold Split:} \ \lor$



RF Ease of Use: EASY Mold Split: ∨



Ease of Use: EASY Mold Split: ∨



RV Ease of Use: EASY Mold Split: V



RQ Ease of Use: EASY Mold Split: ∨



DR Ease of Use: EASY Mold Split: ∨



RL Ease of Use: EASY $\textbf{Mold Split:} \ \lor$

CABLE TO LUG OR BUSBAR




LB Ease of Use: PREFERRED Mold Split: ∨



Ease of Use: DIFFICULT Mold Split: -



LX Ease of Use: EASY Mold Split: V



MG Ease of Use: EASY Mold Split: -



Ease of Use: EASY $\textbf{Mold Split:} \ \lor$



LV Ease of Use: PREFERRED Mold Split: ∨




LW Ease of Use: PREFERRED Mold Split: -




LS Ease of Use: EASY Mold Split: ∨



LM Ease of Use: PREFERRED Mold Split: -



LL Ease of Use: PREFERRED Mold Split: ∨



LK Ease of Use: EASY Mold Split: -



LE Ease of Use: EASY Mold Split: ∨



LG Ease of Use: DIFFICULT Mold Split: -




LF Ease of Use: DIFFICULT Mold Split: V




LH Ease of Use: DIFFICULT Mold Split: -



Ease of Use: EASY
Mold Split: -



BG Ease of Use: EASY Mold Split: -




BH
Ease of Use: MOST
DIFFICULT
Mold Split: V



BJ Ease of Use: EASY Mold Split: V



BK
Ease of Use: EASY
Mold Split: -



DE Ease of Use: DIFFICULT Mold Split: V



Ease of Use: DIFFICULT Mold Split: V



EC
Ease of Use: MOST
DIFFICULT
Mold Split: V



EASE of Use: MOST DIFFICULT Mold Split: V




TW
Ease of Use: PREFERRED
Mold Split: -

LUG OR BUSBAR TO STEEL




HL
Ease of Use: PREFERRED
Mold Split: V


Busbar to Ground Rod



CG
Ease of Use: PREFERRED
Mold Split: -



CH
Ease of Use: PREFERRED
Mold Split: -



DF Ease of Use: EASY Mold Split: V




CN
Ease of Use: PREFERRED
Mold Split: V





CM
Ease of Use: DIFFICULT
Mold Split: V



CP Ease of Use: EASY Mold Split: V



CQ
Ease of Use: DIFFICULT
Mold Split: V

ERICO Cadweld Welding Material, Tools + Accessories

CADWELD WELDING MATERIAL, F20



FEATURED HIGHLIGHTS

- Mixture consists mainly of copper oxide and aluminum
- Primarily used in grounding and bonding applications
- Welding material is in the top of the tube and starting material is in the bottom of the tube
- Packaged by size in plastic tubes with clear caps
- Tubes packaged in plastic boxes along with metal disks
- Each welded connection uses a single disk
- · Non-explosive
- Not subject to spontaneous ignition
- See specific Cadweld connection details to determine welding material requirements



| Part Number | Standard Packaging Quantity |
|-------------|-----------------------------|
| 115 | 10 pc |
| 15 | 20 pc |
| 150 | 10 pc |
| 200 | 10 pc |
| 25 | 20 pc |
| 250 | 10 pc |
| 32 | 20 pc |
| 45 | 20 pc |
| 500 | 10 pc |
| 65 | 20 pc |
| 90 | 10 pc |

CADWELD PLUS WELDING MATERIAL, F20



- Mixture consists mainly of copper oxide and aluminum
- Primarily used in grounding and bonding applications
- Integrated welding material package
- Color coding by size for easy identification
- Electronic ignition
- · No starting material required
- Non-explosive
- Not subject to spontaneous ignition
- See specific Cadweld connection details to determine welding material requirements



| Part Number | Color Code Ring | Certifications | Standard Packaging Quantity |
|-------------|-----------------|----------------|-----------------------------|
| 115PLUSF20 | Orange | cULus | 10 pc |
| 1250PLUSF20 | None | | 5 pc |
| 150PLUSF20 | Dark Blue | cULus | 10 pc |
| 15PLUSF20 | Black | cULus | 20 pc |

| Part Number | Color Code Ring | Certifications | Standard Packaging Quantity |
|-------------|-----------------|----------------|-----------------------------|
| 200PLUSF20 | Yellow | cULus | 10 pc |
| 250PLUSF20 | Purple | cULus | 10 pc |
| 25PLUSF20 | Red | cULus | 20 pc |
| 300PLUSF20 | Light Green | cULus | 10 pc |
| 32PLUSF20 | White | cULus | 20 pc |
| 400PLUSF20 | Brown | | 10 pc |
| 45PLUSF20 | Light Blue | cULus | 20 pc |
| 500PLUSF20 | Light Brown | | 10 pc |
| 600PLUSF20 | White | | 5 pc |
| 65PLUSF20 | Dark Green | cULus | 20 pc |
| 750PLUSF20 | White | | 5 pc |
| 90PLUSF20 | Gray | cULus | 10 pc |

CADWELD EXOLON WELDING MATERIAL, F20



- Mixture consists mainly of copper oxide and aluminum
- Primarily used in grounding and bonding applications
- Designed for applications where low smoke emission is required
- Welding material packaged in tubes without starting material
- Tubes packaged with filters and igniters
- Electronic ignition
- Each weld uses one igniter
- Not subject to spontaneous ignition
- See specific Cadweld connection details to determine welding material requirements



| Part Number | Certifications |
|-------------|----------------|
| XL115 | cULus |
| XL15 | cULus |
| XL150 | cULus |
| XL200 | cULus |
| XL25 | cULus |
| XL250 | cULus |
| XL300 | cULus |
| XL32 | cULus |
| XL400 | cULus |
| XL45 | cULus |
| XL500 | cULus |
| XL600 | |
| XL65 | cULus |
| XL750 | |
| XL90 | cULus |

CADWELD ONE SHOT, CABLE TO GROUND ROD



- Single use ceramic mold which eliminates the need for a graphite mold and handle clamp/frame
- Produces a permanent connection that will not loosen or corrode
- Fits plain copper-bonded, threaded copper-bonded, full-size galvanized and stainless steel ground rods
- NEC® compliant




| Part Number | Mold Family | Ground Rod Diameter, Nominal | Ground Rod Diameter, Actual | Connection, Solid | Connection, Stranded |
|----------------|-------------------|---------------------------------|--------------------------------|-------------------|----------------------|
| | ype: Cadweld Plus | | | | |
| GR1141GPLUS | GR | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| GR1141LPLUS | GR | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| GR1141VPLUS | GR | 1/2" | 0.440" - 0.507" | #2, #1 | #3, #2 |
| GR1161GPLUS | GR | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| GR1161LPLUS | GR | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| GR1161VPLUS | GR | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| GR1162CPLUS | GR | 5/8" | 0.555" - 0.635" | 2/0, 1/0 | #1, 1/0 |
| GR1162GPLUS | GR | 5/8" | 0.555" - 0.635" | | 2/0 |
| GR1162QPLUS | GR | 5/8" | 0.555" - 0.635" | | 4/0 |
| GR1181GPLUS | GR | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| GR1181LPLUS | GR | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| GR1181VPLUS | GR | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |
| GR1182CPLUS | GR | 3/4" | 0.673" - 0.765" | 2/0, 1/0 | #1, 1/0 |
| GR1182GPLUS | GR | 3/4" | 0.673" - 0.765" | | 2/0 |
| GR1182QPLUS | GR | 3/4" | 0.673" - 0.765" | | 4/0 |
| GT1141GPLUS | GT | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| GT1141LPLUS | GT | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| GT1141VPLUS | GT | 1/2" | 0.440" - 0.507" | #2, #1 | #3, #2 |
| GT1142GPLUS | GT | 1/2" | 0.440" - 0.507" | | 2/0 |
| GT1161GPLUS | GT | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| GT1161LPLUS | GT | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| GT1161VPLUS | GT | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| GT1162CPLUS | GT | 5/8" | 0.555" - 0.635" | 2/0, 1/0 | #1, 1/0 |
| GT1162GPLUS | GT | 5/8" | 0.555" - 0.635" | | 2/0 |
| GT1181GPLUS | GT | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| GT1181LPLUS | GT | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| GT1181VPLUS | GT | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |
| GT1182CPLUS | GT | 3/4" | 0.673" - 0.765" | 2/0, 1/0 | #1, 1/0 |
| GT1182GPLUS | GT | 3/4" | 0.673" - 0.765" | | 2/0 |
| NT1141GPLUS | NT | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| NT1141LPLUS | NT | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| NT1141VPLUS | NT | 1/2" | 0.440" - 0.507" | #2, #1 | #3, #2 |
| NT1161G1TPLUS | NT | 5/8" | 0.555" - 0.635" | #8, #6, #2 | #8 |
| NT1161GPLUS | NT | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| NT1161LPLUS | NT | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| NT1161VPLUS | NT | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| NT1181GPLUS | NT | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| NT1181LPLUS | NT | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| NT1181VPLUS | NT | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |
| NX1141GPLUS | NX | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| NX1141LPLUS | NX | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| NX1161G1TPLUS | NX | 5/8" | 0.555" - 0.635" | #8, #6, #2 | #8 |
| | | | | | |

| Part | | Ground Rod Diameter, | Ground Rod Diameter, | | |
|--------------------|-------------------|----------------------|------------------------------------|-------------------|----------------------|
| Number | Mold Family | Nominal | Actual | Connection, Solid | Connection, Stranded |
| NX1161GPLUS | NX | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| NX1161LPLUS | NX | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| NX1161VPLUS | NX | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| NX1181GPLUS | NX | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| NX1181LPLUS | NX | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| NX1181VPLUS | NX | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |
| Welding Material | Type: Traditional | | | | |
| GR1141G | GR | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| GR1141L | GR | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| GR1141V | GR | 1/2" | 0.440" - 0.507" | #2, #1 | #3, #2 |
| GR1161G | GR | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| GR1161GF | GR | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| GR1161L | GR | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| GR1161V | GR | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| GR1162C | GR | 5/8" | 0.555" - 0.635" | 1/0, 2/0 | #1, 1/0 |
| GR1162G | GR | 5/8" | 0.555" - 0.635" | 1, 0, 2, 0 | 2/0 |
| GR1162Q | GR | 5/8" | 0.555" - 0.635" | | 4/0 |
| GR1181G | GR | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| GR1181L | GR | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| GR1181V | GR | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |
| GR1182C | GR | 3/4" | 0.673" - 0.765" | 1/0, 2/0 | #1, 1/0 |
| GR1182G | GR | 3/4" | 0.673" - 0.765" | 1/0, 2/0 | 2/0 |
| GR1182Q | GR | 3/4" | 0.673" - 0.765" | | 4/0 |
| GT1141G | GT | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| GT1141L | GT | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| GT1141V | GT | 1/2" | 0.440" - 0.507" | #2, #1 | |
| GT1161G | GT | 5/8" | 0.555" - 0.635" | #8, #6 | #3, #2 #8 |
| GT1161L | GT | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| GT1161LF | GT | 5/8" | 0.555" - 0.635" | #4, #3 #4, #3 | |
| GT1161V | GT | 5/8" | 0.555" - 0.635" | #4, #3 #2, #1 | #6, #4 #3, #2 |
| GT1161VF | GT | 5/8" | 0.615" - 0.635" | #2, #1 | |
| GT1162C | GT | 5/8" | 0.555" - 0.635" | | #3, #2 |
| GT1162G | GT | 5/8" | 0.555" - 0.635" | 1/0, 2/0 | #1, 1/0 2/0 |
| | GT | | | #0 #6 | #8 |
| GT1181G | GT | 3/4" | 0.673" - 0.765" 0.673" - 0.765" | #8, #6 | |
| GT1181L GT1181V | GT | 3/4" 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| | | | | #2, #1 | #3, #2 |
| GT1182C | GT | 3/4" | 0.673" - 0.765" | 1/0, 2/0 | #1, 1/0 |
| GT1182G | GT | 3/4" | 0.673" - 0.765" | 110 116 | 2/0 |
| NT1141G | NT | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| NT1141L | NT | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| NT1141V | NT | 1/2" | 0.440" - 0.507" | #2, #1 | #3, #2 |
| NT1161G | NT | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| NT1161L | NT | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| NT1161V | NT | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| NT1181G | NT | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| NT1181L | NT | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| NT1181V | NT | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |
| NX1141G | NX | 1/2" | 0.440" - 0.507" | #8, #6 | #8 |
| NX1141L | NX | 1/2" | 0.440" - 0.507" | #4, #3 | #6, #4 |
| NX1161G | NX | 5/8" | 0.555" - 0.635" | #8, #6 | #8 |
| NX1161G1T | NX | 5/8" | 0.555" - 0.635" | #8, #6, #2 | #8 |
| NX1161L | NX | 5/8" | 0.555" - 0.635" | #4, #3 | #6, #4 |
| NX1161V | NX | 5/8" | 0.555" - 0.635" | #2, #1 | #3, #2 |
| NX1181G | NX | 3/4" | 0.673" - 0.765" | #8, #6 | #8 |
| NX1181L | NX | 3/4" | 0.673" - 0.765" | #4, #3 | #6, #4 |
| NX1181V | NX | 3/4" | 0.673" - 0.765" | #2, #1 | #3, #2 |

A gap between conductors may be required. See mold tag for more information.

CADWELD ONE SHOT, CABLE TO CABLE





FEATURED HIGHLIGHTS


- Single use ceramic mold which eliminates the need for a graphite mold and handle clamp/frame
- Produces a permanent connection that will not loosen or corrode
- NEC® compliant



| Part Number | Mold Family | Connection, Solid | Connection, Stranded |
|----------------|-------------------------|-------------------|----------------------|
| Welding Mater | rial Type: Cadweld Plus | | |
| PG11LPLUS | PG | #4, #3 | #6, #4 |
| Welding Mater | rial Type: Traditional | | |
| PG11L | PG | #3, #4 | #6, #4 |
| PG11V | PG | #2, #1 | #3, #2 |

1 HOLE LUG





FEATURED HIGHLIGHTS

- · Provides an efficient bolting surface for grounding and power applications
- Electrolytic grade copper

Material: Copper Finish: Tinned Type: NEMA®

| 71 | | | | | | |
|----------------|--------|--------|-----------|--------|-----------|---------------------------|
| Part Number | Length | Width | Thickness | A | Hole Size | Equivalent Conductor Size |
| B101AA | 1.250" | 0.500" | 0.062" | 0.310" | 0.281" | 39 kcmil |
| B101CE | 1.940" | 1.000" | 0.125" | 0.500" | 0.438" | 159 kcmil |
| B101DE | 1.940" | 1.000" | 0.188" | 0.563" | 0.563" | 239 kcmil |
| B101EE | 2.190" | 1.000" | 0.250" | 0.625" | 0.563" | 318 kcmil |
| B101EG | 2.500" | 1.500" | 0.250" | 0.750" | 0.688" | 477 kcmil |
| B101GG | 2.750" | 1.500" | 0.375" | 0.750" | 0.688" | 716 kcmil |
| B101GH | 3.380" | 2.000" | 0.375" | 1.000" | 0.688" | 955 kcmil |
| B101JH | 3.380" | 2.000" | 0.500" | 1.000" | 0.563" | 1,273 kcmil |
| B101QQ | 1.941" | 1.000" | 0.125" | 0.470" | 0.410" | 159 kcmil |
| PBB101EG | 2.500" | 1.500" | 0.250" | 0.750" | 0.688" | 477 kcmil |
| PBB101GH | 3.380" | 2.000" | 0.375" | 1.000" | 0.688" | 955 kcmil |
| | | | | | | |





FEATURED HIGHLIGHTS

- Provides an efficient bolting surface for grounding and power applications
- · Electrolytic grade copper
- For use with Cadweld type LA connections only


Material: Copper Finish: Tinned Type: NEMA®

| Part Number | Length | Width | Thickness | A | В | Hole Size | Equivalent Conductor Size |
|----------------|--------|-------|-----------|--------|-------|-----------|------------------------------|
| B102CE | 4.000" | 1.0" | 0.125" | 0.625" | 1.75" | 0.563" | 159 kcmil |
| B102DE | 4.000" | 1.0" | 0.188" | 0.625" | 1.75" | 0.563" | 239 kcmil |
| B102EE | 4.125" | 1.0" | 0.250" | 0.625" | 1.75" | 0.563" | 318 kcmil |
| B102EG | 4.125" | 1.5" | 0.250" | 0.625" | 1.75" | 0.563" | 477 kcmil |
| B102EH | 4.125" | 2.0" | 0.250" | 0.625" | 1.75" | 0.563" | 637 kcmil |
| B102GG | 4.750" | 1.5" | 0.375" | 0.625" | 1.75" | 0.563" | 716 kcmil |
| B102GH | 4.750" | 2.0" | 0.375" | 0.625" | 1.75" | 0.563" | 955 kcmil |
| B102JH | 5.250" | 2.0" | 0.500" | 0.625" | 1.75" | 0.563" | 1,273 kcmil |

For sizes not listed, contact nVent ERICO.

4 HOLE LUG





FEATURED HIGHLIGHTS


- Provides an efficient bolting surface for grounding and power applications
- Electrolytic grade copper
- For use with Cadweld type LA connections only

Material: Copper Finish: Tinned Type: NEMA®

| Part Number | Length | Width | Thickness | A | В | Hole Size | Equivalent Conductor Size |
|----------------|--------|-------|-----------|--------|-------|-----------|------------------------------|
| B104EK | 4.50" | 3" | 0.250" | 0.625" | 1.75" | 0.563" | 955 kcmil |
| B104GK | 4.75" | 3" | 0.375" | 0.625" | 1.75" | 0.563" | 1,432 kcmil |
| B104JK | 4.75" | 3" | 0.500" | 0.625" | 1.75" | 0.563" | 1,910 kcmil |

1 HOLE OFFSET LUG





FEATURED HIGHLIGHTS


- Provides an efficient bolting surface for grounding and power applications
- Electrolytic grade copper
- For use with Cadweld type LA connections only

| Part | | | | | | | | | | |
|--|-------------|----------------|-----------------|------------------|-------|------|-------|-------|----|--|
| Number | Н | L | W | Т | Α | В | С | HS | а | |
| Material: Copper — Finish: TinnedType — NEMA®: | | | | | | | | | | |
| B101CEOL | 0.63 | 2.500 | 1.000 | 0.125 | 0.500 | 1.00 | 0.875 | 0.438 | 45 | |
| B101DEOL | 0.69 | 2.690 | 1.000 | 0.188 | 0.563 | 1.13 | 0.875 | 0.563 | 45 | |
| B101EEOL | 0.75 | 3.000 | 1.000 | 0.250 | 0.625 | 1.28 | 1.060 | 0.563 | 45 | |
| B101EGOL | 0.75 | 3.250 | 1.500 | 0.250 | 0.750 | 1.50 | 1.060 | 0.688 | 45 | |
| B101GGOL | 1.25 | 4.250 | 1.500 | 0.375 | 0.750 | 1.75 | 1.500 | 0.688 | 45 | |
| B101GHOL | 1.25 | 5.000 | 2.000 | 0.375 | 1.000 | 2.38 | 1.500 | 0.688 | 45 | |
| B101QQOL | 0.62 | 2.520 | 1.000 | 0.125 | 0.470 | 0.87 | 0.750 | 0.440 | 45 | |
| B101SQOL | 0.56 | 2.677 | 1.000 | 0.187 | 0.550 | 1.10 | 0.810 | 0.560 | 45 | |
| Material: Cop | per – Finis | sh: TinnedTyp | e — Non-NEMA | ([®] : | | | | | | |
| B305TC | 0.79 | 3.600 | 1.180 | 0.200 | 0.590 | 1.33 | 1.570 | 0.669 | 45 | |
| Material: Sta | inless Stee | l 304 (EN 1.43 | 301) — Type: No | n-NEMA® | | | | | | |
| B305SS | 0.79 | 3.600 | 1.180 | 0.200 | 0.590 | 1.33 | 1.570 | 0.669 | 45 | |

For sizes not listed, contact nVent ERICO.

2 HOLE OFFSET LUG






FEATURED HIGHLIGHTS

- Provides an efficient bolting surface for grounding and power applications
- Electrolytic grade copper
- For use with Cadweld type LA connections only

Material: Copper Finish: Tinned

| B102DEOL 0.69 4.500 1.000 0.188 0.625 1.75 3.000 0.875 0.56 B102EEOL 0.75 4.750 1.000 0.250 0.625 1.75 3.000 1.060 0.56 B102EFOL 0.75 4.750 1.250 0.250 0.625 1.75 3.000 1.060 0.56 B102EGOL 0.75 4.750 1.500 0.250 0.625 1.75 3.000 1.060 0.56 B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | -inisn. rinned | | | | | | | | | |
|---|----------------|------|-------|-------|-------|-------|------|-------|-------|-------|
| B102CEOL 0.63 4.500 1.000 0.125 0.625 1.75 3.000 0.875 0.56 B102DEOL 0.69 4.500 1.000 0.188 0.625 1.75 3.000 0.875 0.56 B102EEOL 0.75 4.750 1.000 0.250 0.625 1.75 3.000 1.060 0.56 B102EFOL 0.75 4.750 1.250 0.250 0.625 1.75 3.000 1.060 0.56 B102EGOL 0.75 4.750 1.500 0.250 0.625 1.75 3.000 1.060 0.56 B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | | н | L | w | т | A | В | С | D | HS |
| B102DEOL 0.69 4.500 1.000 0.188 0.625 1.75 3.000 0.875 0.56 B102EEOL 0.75 4.750 1.000 0.250 0.625 1.75 3.000 1.060 0.56 B102EFOL 0.75 4.750 1.250 0.250 0.625 1.75 3.000 1.060 0.56 B102EGOL 0.75 4.750 1.500 0.250 0.625 1.75 3.000 1.060 0.56 B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | Type: NEMA® | | | | | | | | | |
| B102EE0L 0.75 4.750 1.000 0.250 0.625 1.75 3.000 1.060 0.56 B102EFOL 0.75 4.750 1.250 0.250 0.625 1.75 3.000 1.060 0.56 B102EGOL 0.75 4.750 1.500 0.250 0.625 1.75 3.000 1.060 0.56 B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | B102CEOL | 0.63 | 4.500 | 1.000 | 0.125 | 0.625 | 1.75 | 3.000 | 0.875 | 0.563 |
| B102EFOL 0.75 4.750 1.250 0.250 0.625 1.75 3.000 1.060 0.56 B102EGOL 0.75 4.750 1.500 0.250 0.625 1.75 3.000 1.060 0.56 B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | B102DEOL | 0.69 | 4.500 | 1.000 | 0.188 | 0.625 | 1.75 | 3.000 | 0.875 | 0.563 |
| B102EGOL 0.75 4.750 1.500 0.250 0.625 1.75 3.000 1.060 0.56 B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | B102EEOL | 0.75 | 4.750 | 1.000 | 0.250 | 0.625 | 1.75 | 3.000 | 1.060 | 0.563 |
| B102EHOL 0.75 5.000 2.000 0.250 0.625 1.75 3.000 1.250 0.56 B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | B102EFOL | 0.75 | 4.750 | 1.250 | 0.250 | 0.625 | 1.75 | 3.000 | 1.060 | 0.563 |
| B102GGOL 1.25 5.875 1.500 0.375 0.625 1.75 3.250 1.500 0.56 B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | B102EGOL | 0.75 | 4.750 | 1.500 | 0.250 | 0.625 | 1.75 | 3.000 | 1.060 | 0.563 |
| B102GHOL 1.25 5.875 2.000 0.375 0.625 1.75 3.250 1.500 0.56 | B102EHOL | 0.75 | 5.000 | 2.000 | 0.250 | 0.625 | 1.75 | 3.000 | 1.250 | 0.563 |
| | B102GGOL | 1.25 | 5.875 | 1.500 | 0.375 | 0.625 | 1.75 | 3.250 | 1.500 | 0.563 |
| B102JHOL 1.38 5.875 2.000 0.500 0.625 1.75 3.250 2.000 0.50 | B102GHOL | 1.25 | 5.875 | 2.000 | 0.375 | 0.625 | 1.75 | 3.250 | 1.500 | 0.563 |
| | B102JHOL | 1.38 | 5.875 | 2.000 | 0.500 | 0.625 | 1.75 | 3.250 | 2.000 | 0.563 |
| B102QQOL 0.62 4.488 1.000 0.125 0.620 1.75 2.990 1.000 0.55 | B102QQOL | 0.62 | 4.488 | 1.000 | 0.125 | 0.620 | 1.75 | 2.990 | 1.000 | 0.559 |
| Type: Non-NEMA® | Type: Non-NE | MA® | | | | | | | | |
| B103DEOL 1.07 4.500 1.000 0.188 0.625 1.00 1.930 0.875 0.43 | B103DEOL | 1.07 | 4.500 | 1.000 | 0.188 | 0.625 | 1.00 | 1.930 | 0.875 | 0.438 |





Material: Copper Finish: Tinned Type: NEMA®

FEATURED HIGHLIGHTS


- · Provides an efficient bolting surface for grounding and power applications
- · Electrolytic grade copper
- For use with Cadweld type LA connections only

| Part Number | н | L | w | T | A | В | С | D | HS |
|----------------|------|------|---|-------|-------|------|-------|------|-------|
| B104EKOL | 1.56 | 6.00 | 3 | 0.250 | 0.625 | 1.75 | 3.375 | 1.75 | 0.563 |
| B104GKOL | 1.56 | 6.25 | 3 | 0.375 | 0.625 | 1.75 | 3.625 | 1.75 | 0.563 |
| B104JKOL | 1.56 | 6.25 | 3 | 0.500 | 0.625 | 1.75 | 3.625 | 1.75 | 0.563 |

For sizes not listed, contact nVent ERICO.

1 HOLE LUG, GL STYLE





FEATURED HIGHLIGHTS

- Provides an efficient bolting surface for grounding and power applications
- · Electrolytic grade copper
- For use with Cadweld type LA connections only

Material: Copper Finish: Tinned Type: NEMA®

| Part Number | Height | Length | Width | Thickness | A | Hole Size | Angle | Equivalent Conductor Size |
|----------------|--------|--------|--------|-----------|--------|-----------|-------|------------------------------|
| B121CE | 0.44" | 1.440" | 1.000" | 0.125" | 0.625" | 0.563" | 90° | 159 kcmil |
| B121DE | 0.44" | 1.470" | 1.000" | 0.188" | 0.625" | 0.563" | 105° | 239 kcmil |
| B121EE | 0.44" | 1.500" | 1.000" | 0.250" | 0.625" | 0.563" | 135° | 318 kcmil |
| B121EG | 0.44" | 1.500" | 1.500" | 0.250" | 0.625" | 0.563" | 135° | 477 kcmil |
| B121QQ | 0.43" | 1.516" | 1.000" | 0.126" | 0.630" | 0.560" | 90° | 159 kcmil |
| B121SQ | 0.43" | 1.437" | 1.000" | 0.187" | 0.630" | 0.550" | 90° | 239 kcmil |

2 HOLE LUG, GL STYLE





Material: Copper Finish: Tinned

FEATURED HIGHLIGHTS

- · Provides an efficient bolting surface for grounding and power applications
- · Electrolytic grade copper
- For use with Cadweld type LA connections only

| Part Number | н | L | w | т | A | В | HS | a | Equivalent Conductor Size |
|----------------|------------|------|------|-------|-------|------|-------|----|------------------------------|
| Type: NEMA | \ ® | | | | | | | | |
| B122CE | 0.44 | 3.19 | 1.00 | 0.125 | 0.625 | 1.75 | 0.563 | 90 | 159 |
| B122DE | 0.44 | 3.25 | 1.00 | 0.188 | 0.625 | 1.75 | 0.563 | 90 | 239 |
| B122EE | 0.44 | 3.25 | 1.00 | 0.250 | 0.625 | 1.75 | 0.563 | 90 | 318 |
| B122EG | 0.44 | 3.25 | 1.50 | 0.250 | 0.625 | 1.75 | 0.563 | 90 | 477 |
| Type: Non-N | IEMA® | | | | | | | | |
| B123CE03 | 0.44 | 2.47 | 1.00 | 0.125 | 0.625 | 1.00 | 0.438 | 90 | 159 |
| B123EG03 | 0.44 | 3.25 | 1.50 | 0.250 | 0.625 | 1.00 | 0.438 | 90 | 477 |

For sizes not listed, contact nVent ERICO.

2 HOLE TELECOM LUG





FEATURED HIGHLIGHTS

- Provides an efficient bolting surface for grounding and power applications
- Electrolytic grade copper
- Hole spacing for telecom ground bars
- For use with Cadweld mold GLPCC001TC only

Material: Copper Finish: Tinned

| Part Number | Height | Length | Width | Thickness | A | В | Hole Size | Angle | Equivalent Conductor Size |
|----------------|--------|--------|--------|-----------|--------|--------|-----------|-------|------------------------------|
| B922CC14A | 0.31" | 1.875" | 0.625" | 0.125" | 0.375" | 0.625" | 0.281" | 90° | 99 kcmil |
| B922CC14B | 0.31" | 1.875" | 0.625" | 0.125" | 0.375" | 0.750" | 0.281" | 90° | 99 kcmil |
| B922CC14C | 0.31" | 1.875" | 0.625" | 0.125" | 0.375" | 1.000" | 0.281" | 90° | 99 kcmil |
| B922CC38B | 0.31" | 1.875" | 0.625" | 0.125" | 0.375" | 0.750" | 0.281" | 90° | 99 kcmil |
| B922CC38C | 0.31" | 1.875" | 0.625" | 0.125" | 0.375" | 1.000" | 0.281" | 90° | 99 kcmil |
| B922CE716B | 0.44" | 1.875" | 1.000" | 0.125" | 0.625" | 0.750" | 0.281" | 90° | 159 kcmil |



FEATURED HIGHLIGHTS

- Made with bare annealed copper cable
- Tinned copper NEMA® lugs welded to the cable with Cadweld connections

Prefabricated lug bonds are custom made to specifications. Common usage includes cable tray bonding and grounding, structure bonds, surge arrester leads and power jumpers.

Material: Copper Finish: Tinned

| Part | Conductor | Number | | | | | | |
|---------------|--------------------|----------|----------|----------|-------|-----------|-----------|-------|
| Number | Size | of Wires | Length 1 | Length 2 | Width | Thickness | Hole Size | Angle |
| Lug Configura | | _ | 0.11 | 4.7" | 4.11 | 0.40# | 0.41.511 | |
| B2121L8 | #4 Stranded | 7 | 8" | 1.47" | 1" | 0.19" | 9/16" | |
| B2121V12 | #2 Stranded | 7 | 12" | 1.47" | 1" | 0.19" | 9/16" | |
| B2122G16 | 2/0 Stranded | 7 | 16" | 1.47" | 1" | 0.19" | 9/16" | |
| B2122Q20 | 4/0 Stranded | 7 | 20" | 1.47" | 1" | 0.19" | 9/16" | |
| B2122Q24 | 4/0 Stranded | 7 | 24" | 1.47" | 1" | 0.19" | 9/16" | |
| Lug Configura | tion: B213 | | | | | | | |
| B2131L15 | #4 Stranded | 7 | 15" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L20 | #4 Stranded | 7 | 20" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L22 | #4 Stranded | 7 | 22" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L24 | #4 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L28 | #4 Stranded | 7 | 28" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L32 | #4 Stranded | 7 | 32" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L35 | #4 Stranded | 7 | 35" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L38 | #4 Stranded | 7 | 38" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L42 | #4 Stranded | 7 | 42" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131L44 | #4 Stranded | 7 | 44" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131V18 | #2 Stranded | 7 | 18" | 3.25" | 1" | 0.19" | 9/16" | |
| B2131V36 | #2 Stranded | 7 | 36" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132G11 | 2/0 Stranded | 7 | 11" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132G14 | 2/0 Stranded | 7 | 14" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132Q18 | 4/0 Stranded | 7 | 18" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132Q36 | 4/0 Stranded | 7 | 36" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132Q48 | 4/0 Stranded | 7 | 48" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132Q54 | 4/0 Stranded | 7 | 54" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132Q60 | 4/0 Stranded | 7 | 60" | 3.25" | 1" | 0.19" | 9/16" | |
| B2132V18 | 250 kcmil Stranded | 19 | 18" | 3.25" | 1" | 0.19" | 9/16" | |
| Lug Configura | | 19 | 10 | 3.23 | | 0.19 | 9/ 10 | |
| B2162C72 | 1/0 Stranded | 7 | 72" | 1.47" | 1" | 0.19" | 9/16" | |
| B2162C72 | | | | | 1" | | | |
| | 1/0 Stranded | 7 | 96" | 1.47" | | 0.19" | 9/16" | |
| B2162Q24 | 4/0 Stranded | 7 | 24" | 1.47" | 1" | 0.19" | 9/16" | |
| B2162Q8 | 4/0 Stranded | 7 | 8" | 1.47" | 1" | 0.19" | 9/16" | |
| Lug Configura | | _ | 0.4" | 0.05" | 4.11 | 0.40# | 0.44.511 | |
| B2171L24 | #4 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | |
| B2172C12 | 1/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | |
| B2172G24 | 2/0 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | |
| B2172Q12 | 4/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | |
| B2172Q24 | 4/0 Stranded | 7 | 24" | 3.25" | 1" | 0.19" | 9/16" | |
| Lug Configura | | | | | | | | |
| B2182Q30 | 4/0 Stranded | 7 | 30" | 1.47" | 1" | 0.19" | 9/16" | 45° |
| Lug Configura | tion: B219 | | | | | | | |
| B2192C12 | 1/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | 45° |
| B2192Q08 | 4/0 Stranded | 7 | 8" | 3.25" | 1" | 0.19" | 9/16" | 45° |
| B2192Q12 | 4/0 Stranded | 7 | 12" | 3.25" | 1" | 0.19" | 9/16" | 45° |

HANDLE CLAMP



FEATURED HIGHLIGHTS

- Used to securely close the mold around the conductors
- Handle clamps are required for most molds
- Specialized frames and handles are required for some molds
- L160SM has off-set handles to ease the installation of connections in a ditch
- See specific Cadweld mold requirements

| Part | |
|----------------|---------------------|
| Part Number | Fits Mold Price Key |
| L159 | D, F, J, Z |
| L160 | C, E, Q, R |
| L160SM | C, E, Q, R |

HANDLE CLAMP FOR THREE-PIECE VERTICAL SPLIT MOLDS



- Opens the mold in two directions
- Provides more convenience and further simplifies the installation process

| Part Number | Fits Mold Price Key | |
|----------------|---------------------|--|
| 163 | 3 | |
| L164 | 4 | |

HANDLE CLAMP, MAGNETIC



FEATURED HIGHLIGHTS

- Designed to securely hold an Cadweld mold to a large flat or slightly curved vertical steel surface
- Used on vertically split molds

| Part Number | Fits Mold Price Key | |
|----------------|---------------------|--|
| B159M | D, F | |
| B396 | C, R | |

HANDLE CLAMP WITH CHAIN SUPPORT



- Securely holds the Cadweld mold to a pipe
- See specific Cadweld mold requirements

| Part Number | Fits Mold Price Key | For Connection Type |
|-------------------|---------------------|----------------------|
| Pipe Orientation: | Horizontal | |
| B159H | D, F | HA, HC, HS, HT |
| B160B | C, R | Vertical Split Molds |
| B160H | C, R | HA, HC, HS, HT |
| Pipe Orientation: | Vertical | |
| B159V | D, F | VS, VF, VB, VV |
| B159VT | D, F | VT |
| B160V | C, R | VS, VF, VB, VV |
| B160VT | C, R | VT |
| L160VG | C, R | VG |

HANDLE CLAMP CHAIN



FEATURED HIGHLIGHTS

- Handle clamp accessory used on specific clamps to securely hold the Cadweld mold to a pipe
- See specific Cadweld mold requirements

| Part Number | For Connection Type | Handle Clamp | Chain Length | Pipe Orientation | Pipe Size |
|----------------|---------------------|---|--------------|----------------------|-----------|
| B158 | HA, HC, HS, HT, VB | B159V, B160V, B159VT, B160VT, B159H, and B160H | 20" | Horizontal, Vertical | 4" - 10" |

MAGNETIC ASSEMBLY



| Part Number | | | |
|----------------|--|--|--|
| B323N2 | | | |

- Powerful welding magnet securely positions the mold during the connection process to a flat steel surface or steel pipe
- Helps with mold stability to reduce the chance of welding material leakage
- Quickly and easily attaches to hold down "A" Price Key molds (new or retrofit)
- · Assembly is adjustable
- Ideal when used with Cadweld PLUS to allow for use of full extension of control unit lead

PIPE CLAMP CHAIN



FEATURED HIGHLIGHTS

- Handle clamp accessory
- Used on specific clamps to hold the Cadweld mold to a particular surface
- See specific Cadweld mold requirements


| Part Number | Fits Mold Price Key | Pipe Size | Pipe Orientation | |
|----------------|---------------------|-----------|------------------|--|
| B319 | CAN, CAP, CAT | 6" Max | Vertical | |
| B320 | CAA | 6" Max | Horizontal | |

SUPPORT CLAMP FOR VERTICAL FLAT STEEL SURFACE



- Securely supports an Cadweld mold to a vertical "H" column or angle
- Easily attaches to an L160 or L159 handle clamp
- For use with type VF molds for up to 3/4" (19.1 mm) thick steel
- For use with type VB, VG, VN, and VS molds for up to 1" (25.4 mm) thick steel

FENCE FABRIC ATTACHMENT ASSEMBLY

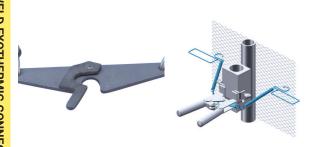

FEATURED HIGHLIGHTS

- Fastens to an L160 or L159 handle clamp
- Firmly holds the mold to the fence post after the fence fabric is in place
- Ideal for retrofit jobs

| Part Number | For Connection Type | |
|----------------|---------------------|--|
| B827A | VS, VF, VB, VV | |

HANDLE CLAMP, MINI EZ



- Mini EZ Handle Clamps are typically included with the mold
- See specific Cadweld mold or Cadweld kit requirements to determine the handle clamp requirements

| Part Number | Fits Mold Price Key |
|----------------|---------------------|
| B399A | N, P, T |
| B399B | N, P, T |
| B399C | N, P, T |
| B399Q | N, P, T |
| L161 | N, P, T |



FEATURED HIGHLIGHTS

• Securely holds the Cadweld mold to a rod or rebar in a vertical position

| Part Number | Fits Mold Price Key | Connection Type |
|----------------|---------------------|--|
| L161A | Р | GYP, GY35 Compact kit, RC35 and GY35 Maxikit |

HANDLE CLAMP, MINI EZ WITH SPRING CLAMP



- Mini EZ Handle Clamps with Spring Clamp are typically included with the mold
- Ideal for connections to ground rods and rebar
- See specific Cadweld mold or Cadweld kit requirements to determine the handle clamp requirements

| Part Number | Fits Mold Price Key |
|----------------|---------------------|
| B399AS | N, P, T |
| B399BS | N, P, T |
| B399CS | N, P, T |
| B399DS | N, P, T |
| B399ES | N, P, T |

HANDLE CLAMP, MINI EZ, MAGNETIC



| Part Number | Fits Mold Price Key |
|----------------|---------------------|
| B399AM | N, P, T |
| B399BM | N, P, T |

FEATURED HIGHLIGHTS

- Designed to securely hold an Cadweld mold to a large flat or slightly curved vertical steel surface
- Allows for simple placement of the Cadweld mold in the desired connection location
- See specific Cadweld mold or Cadweld kit requirements to determine the handle clamp requirements

CABLE CLAMP ASSEMBLY



| Part Number | | | |
|----------------|--|--|--|
| B265 | | | |

- Designed for use with hard-drawn copper cable, copper-bonded conductors or any cable under tension
- Use of the clamp aids in preventing cable movement and prolongs mold life

GROUND ROD CLAMPING TOOL



FEATURED HIGHLIGHTS

• Must be used to provide the correct positioning of ground rods and mold while splicing the rods with Cadweld for HDGB and GB type connections

| Part Number | | | |
|----------------|--|--|--|
| B120 | | | |

DISK



FEATURED HIGHLIGHTS

- Required each time a traditional Cadweld connection is made
- Placed at the bottom of the crucible, holding the welding material until the reaction takes place

Material: Steel

| Part Number | Welding Material | Diameter |
|----------------|----------------------------|----------|
| B117A | 15 - 32, Sold Separately | 3/4" |
| B117B | 45 - 115, Sold Separately | 1" |
| B117C | 150 - 500, Sold Separately | 1 1/2" |

DISK KIT



FEATURED HIGHLIGHTS

- Contains three disk sizes for common Cadweld connection applications
- Convenience item for replacing lost or damaged disks

| Part Number | Material Control of the Control of t |
|----------------|--|
| T328D | Steel |

DISK CONTAINER



FEATURED HIGHLIGHTS

• Metal container for holding disks and small Cadweld accessories

| Part Number | Diameter | Height |
|----------------|----------|--------|
| T328 | 3" | 1" |



- Used to adapt a limited range of smaller size cables to a larger size Cadweld Mold
- Provides strength and stability on finely-stranded copper conductors

| Part Number | Length | Thickness | Diameter | | | | |
|--|---|-----------|----------|--|--|--|--|
| Material: Copper — Finish: TinnedType — Chamfered: | | | | | | | |
| S01 | 1.000" | 0.031" | 0.561" | | | | |
| S07 | 1.000" | 0.031" | 0.671" | | | | |
| SBS09C | 1.000" | 0.031" | 0.328" | | | | |
| SBS11C | 0.813" | 0.031" | 0.212" | | | | |
| SBS12C | 1.063" | 0.031" | 0.212" | | | | |
| SBS13C | 1.500" | 0.031" | 0.212" | | | | |
| Material: Copper — | Material: Copper — Finish: TinnedType — Flared: | | | | | | |
| 180380 | 0.984" | 0.094" | 0.209" | | | | |
| H102F | 1.024" | 0.041" | 0.169" | | | | |
| H106AF | 1.378" | 0.039" | 0.591" | | | | |
| H106F | 1.024" | 0.039" | 0.591" | | | | |
| H113F | 1.024" | 0.039" | 0.315" | | | | |
| H11F | 1.024" | 0.039" | 0.512" | | | | |
| PBS24F | 1.500" | 0.031" | 0.795" | | | | |
| S01F | 1.000" | 0.031" | 0.561" | | | | |
| S02F | 1.000" | 0.031" | 0.611" | | | | |
| S03F | 1.000" | 0.031" | 0.455" | | | | |
| S05F | 1.000" | 0.031" | 0.391" | | | | |
| S06F | 1.000" | 0.031" | 0.480" | | | | |
| S07F | 1.000" | 0.031" | 0.671" | | | | |
| S09F | 1.000" | 0.031" | 0.328" | | | | |
| S17F | 1.000" | 0.031" | 0.344" | | | | |
| S20F | 1.000" | 0.031" | 0.240" | | | | |
| S429F1C12 | 0.750" | 0.015" | 0.134" | | | | |
| S429F1F | 0.375" | 0.015" | 0.168" | | | | |
| S429F1J | 0.375" | 0.015" | 0.212" | | | | |
| S429F1N | 0.438" | 0.015" | 0.268" | | | | |
| S429F1N12 | 0.750" | 0.015" | 0.268" | | | | |
| S429F1S | 0.438" | 0.015" | 0.300" | | | | |
| S429F1W | 0.438" | 0.015" | 0.336" | | | | |
| S429F1W12 | 0.750" | 0.015" | 0.336" | | | | |
| S429F2A | 0.500" | 0.015" | 0.380" | | | | |
| S429F2A12 | 0.750" | 0.015" | 0.380" | | | | |
| S429F2E | 0.500" | 0.015" | 0.428" | | | | |
| S429F2E16 | 1.000" | 0.015" | 0.428" | | | | |
| S429F2J | 0.500" | 0.020" | 0.480" | | | | |
| S429F2J16 | 1.000" | 0.020" | 0.480" | | | | |
| S429F2N | 0.563" | 0.020" | 0.540" | | | | |
| S429F2N16 | 1.000" | 0.020" | 0.540" | | | | |
| S429F2S | 0.563" | 0.020" | 0.605" | | | | |
| S429F2S16 | 1.000" | 0.020" | 0.605" | | | | |

| Part Number | Length | Thickness | Diameter |
|----------------|---------------------------|-----------|----------|
| S429F2W16 | 1.000" | 0.020" | 0.658" |
| S429F3B16 | 1.000" | 0.020" | 0.722" |
| S429F3F | 0.688" | 0.020" | 0.780" |
| S429F3F16 | 1.000" | 0.020" | 0.780" |
| S429F3K16 | 1.000" | 0.025" | 0.832" |
| S429F3M12 | 0.750" | 0.015" | 0.242" |
| S429F3N16 | 1.000" | 0.025" | 0.882" |
| S429F3S20 | 1.250" | 0.025" | 0.930" |
| S429F4C16 | 1.000" | 0.020" | 0.466" |
| S429F4K16 | 1.000" | 0.020" | 0.666" |
| S429F4M16 | 1.000" | 0.020" | 0.749" |
| S429F4N24 | 1.500" | 0.035" | 1.155" |
| S429F4P16 | 1.000" | 0.020" | 0.799" |
| S429F4T20 | 1.250" | 0.025" | 0.982" |
| S429F4X24 | 1.500" | 0.035" | 1.074" |
| S429F5A24 | 1.500" | 0.035" | 1.332" |
| S429F5B24 | 1.500" | 0.035" | 1.134" |
| S429F5E24 | 1.500" | 0.035" | 1.224" |
| S429F5F24 | 1.500" | 0.035" | 1.375" |
| S429FY922 | 1.375" | 0.078" | 0.833" |
| | — Finish: TinnedType — St | | |
| B112 | 1.063" | 0.031" | 0.212" |
| B1331H | 1.000" | 0.025" | 0.106" |
| B1331K | 1.000" | 0.031" | 0.140" |
| B1331L | 1.000" | 0.031" | 0.170" |
| B1331V | 1.000" | 0.031" | 0.240" |
| B1331Y | 1.000" | 0.031" | 0.265" |
| B1332C | 1.000" | 0.031" | 0.312" |
| B1332G | 1.000" | 0.031" | 0.344" |
| B1332L | 1.000" | 0.031" | 0.391" |
| B1332Q | 1.000" | 0.031" | 0.430" |
| H101 | 1.024" | 0.039" | 0.236" |
| H102 | 0.984" | 0.041" | 0.169" |
| H103 | 0.984" | 0.047" | 0.209" |
| H105 | 0.925" | 0.039" | 0.118" |
| H117 | 0.984" | 0.039" | 0.276" |
| S4291F | 0.375" | 0.015" | 0.168" |
| S4291J | 0.375" | 0.015" | 0.212" |
| S4291N12 | 0.750" | 0.015" | 0.268" |
| S4291W | 0.438" | 0.015" | 0.336" |
| S4291W12 | 0.750" | 0.015" | 0.336" |
| S4292A | 0.500" | 0.015" | 0.380" |
| S4292E | 0.500" | 0.015" | 0.428" |
| S4292J | 0.500" | 0.020" | 0.480" |
| S4292J16 | 1.000" | 0.020" | 0.480" |
| S4292N | 0.563" | 0.020" | 0.540" |
| S4292S | 0.563" | 0.020" | 0.605" |
| S4293F | 0.688" | 0.020" | 0.780" |
| | Finish: Copper PlatedType | | |
| KH118003532 | 2.000" | 0.035" | 1.180" |
| | | 0.000 | |



FEATURED HIGHLIGHTS

- Contains a variety of adapter sleeves that allow a buildup of smaller conductors to fit the opening of larger sized conductors in a Cadweld mold
- Includes shim stock for wrapping around a conductor, increasing the diameter to fit larger conductor openings in a Cadweld mold
- Contains extra disks for all sizes of traditional welding material
- Includes extra flints for Cadweld Flint Ignitors

Part Number

T427

COPPER SHIM





FEATURED HIGHLIGHTS

• Wrapped around the cable until the diameter is about the same as the cable opening in the mold

Material: Copper

| Part | | | |
|--------|--------|-------|-----------|
| Number | Length | Width | Thickness |
| B140A | 1.5" | 3.0" | 0.013" |
| B140B | 2.5" | 3.0" | 0.013" |
| B140K | 4.5" | 1.5" | 0.013" |
| B140L | 5.5" | 1.5" | 0.013" |
| B140N | 3.0" | 1.5" | 0.013" |
| B141A | 1.5" | 3.0" | 0.013" |
| B141C | 2.5" | 3.0" | 0.013" |

CADWELD REPLACEMENT PART KIT



Part Number

K158A

FEATURED HIGHLIGHTS

- Miscellaneous handle clamp and Cadweld connection accessories
- Kit includes: (1) disk container, (2) handle clamp thumb screws, (1) handle clamp clevis pin, (1) handle clamp hitch pin, (1) handle clamp adjustment screw, (10) replacement flints, (4) B140A copper shims, (5) B1331L tinned copper sleeves, and (5) B1332Q tinned copper sleeves

BATTING/PACKING MATERIAL



- Preformed ceramic packing material
- Seals mold conductor openings
- Prevents welding material leakage
- See Cadweld mold requirements for specific batting part number

| Part Number |
|----------------|
| ACB4000H1 |
| ACC4005H2 |
| ACC4007H3 |
| ACC4035H8 |
| ACC4035H9 |
| ACC4061H1 |
| ACC4061H2 |
| ACC4061H3 |
| ACC4061H4 |
| ACC4062H1 |
| B142A |
| B142B |
| B143A |
| B143B |
| B144A |
| B144B |
| B144C |
| B144D |
| B144E |
| B144M |
| B144Q |
| B145A |

- Used to repair a galvanized surface that has been damaged by welding or drilling
- Low-temperature self-fluxing material
- The bar may be melted using the heat produced after making a Cadweld connection, or a small torch may be used

| Part Number | Material Material |
|----------------|-------------------|
| T319 | Zinc Alloy |

GALVANIZING SPRAY



- Easy-to-use galvanizing paint in a spray can
- Used to touch up heat affected areas on galvanized steel surfaces after welding

| Part Number | Unit Weight |
|----------------|-------------|
| T372A | 1 lb |

HAMMER DIE



Material: Steel

- Hardened steel die
- \cdot Used to form the end of a field-made bond
- Formed end designed to fit specific Cadweld mold

| Material. Steel | | |
|-----------------|-----------------------------------|--------------------|
| Part Number | Conductor Size | nVent ERICO Sleeve |
| Type: Grounding | | |
| JD01 | 4/0 Concentric | S01F |
| JD02 | 4/0 Ropelay | S02F |
| JD03 | 2/0 Concentric | S03F |
| JD05 | 1/0 Concentric | S05F |
| JD06 | 2/0 Ropelay | S06F |
| JD07 | 250 kcmil Ropelay | S07F |
| JD09 | #2 Concentric | S09F |
| JD11 | #4 Concentric | S20F |
| Type: Power | | |
| WD80 | 1/0 Concentric | S05F |
| WD82 | 95 mm² Concentric, 4/0 Concentric | S01F |
| WD83 | 4/0 Ropelay | S02F |
| WD84 | 2/0 Concentric, 1/0 Ropelay | S03F |
| WD85 | 2/0 Ropelay | S06F |
| WD87 | 150 mm² Ropelay | S24F |
| WD88 | 4/0 Welding cable | S429F3N16 |
| WD94 | 35 mm² Concentric | S17F |
| Type: Signal | | |
| SBD50 | 3/16" Bondstrand | SBS12C |
| SBD51 | 5/16" Bondstrand | SBS09C |
| SBD55 | 35 mm² Concentric | S17F |
| | | |



- Ideal for sealing hot or cold molds to retard leakage from large stranded conductors
- Prolongs useful mold life when the cable opening becomes worn
- Required on certain Cadweld molds such as Types HA, HB, HC,

| Part Number | Unit Weight |
|----------------|-------------|
| T403 | 2 lb |

FLINT IGNITOR



FEATURED HIGHLIGHTS

 \bullet Used to ignite the starting material when making a traditional Cadweld connection or a nVent LENTON Cadweld rebar connection

| Part Number | | | |
|----------------|--|--|--|
| T320 | | | |

REPLACEMENT FLINT



FEATURED HIGHLIGHTS

FEATURED HIGHLIGHTS

• Replacement flints for T320 Flint Ignitor

| Part Number | Standard Packaging Quantity | |
|----------------|-----------------------------|--|
| T320A | 10 pc | |

FLINT IGNITOR EXTENSION



• Attaches to T320 Flint Ignitor and allows the installer to be approximately 30" (762 mm) away from the mold

• Ideal for applications such as making a mold in a narrow trench while the installer is at ground level

Part Number

B32130



- Battery-powered controller box designed for 600 connections with one set of batteries
- Requires no special batteries or charger
- Comes standard with high temperature lead
- Connects to the welding material ignition strip with a custom made, purpose-designed termination clip
- Sends a predetermined voltage to the ignition strip and initiates the reaction
- PBPLUSCU meets AREMA® C&S Manual Recommendations; Part 8.1.34, 2013



| Part Number | Cable Length | Batteries | Working Temperature | Certifications | |
|------------------------------|--------------|-------------------------|---------------------|----------------|--|
| Type: Controller Box | with Leads | | | | |
| PBPLUSCU | 6' | 8 Lithium AA Batteries | -40 to 140 °F | cURus | |
| PLUSCU | 6' | 8 Standard AA Batteries | 0 – 130 °F | cURus, NOM | |
| PLUSCU15L | 15' | 8 Standard AA Batteries | 0 – 130 °F | cURus | |
| Type: Replacement Leads Only | | | | | |
| PLUSCULD15QC | 15' | | | | |
| PLUSCULDQC | 6' | | | | |

BATTERY PACK



Part Number XLB971A1

- Battery, charger, and carrying case required for the ignition of Cadweld Exolon welding material
- Battery operates approximately 200 connections before requiring a recharge
- · Charger, all electrical connections and instructions are included in the battery case

CARD CLOTH BRUSH



Part Number T313

FEATURED HIGHLIGHTS

- Aids in removing oxides from conductor surfaces
- Made of short, stiff bristles
- Generally preferred for cleaning concentric conductors and busbars which are not heavily oxidized

WIRE BRUSH



- Aids in removing oxides from conductor surfaces
- Useful for cleaning coarse or very dirty conductors

| Part Number | Product | |
|----------------|------------------------------------|--|
| T314 | Brush with Replaceable Brush Heads | |
| T314A | Replacement Brush Heads | |
| T336 | Standard Brush | |



- Ideal for cleaning Cadweld molds
- Soft bristles minimize wear of graphite during the cleaning process
- Removes slag and particles from mold cavity, tap hole, crucible and cover

| Part Number | |
|----------------|--------|
| Number | Туре |
| T302A | Wide |
| T394 | Narrow |

MOLD CLEANER



FEATURED HIGHLIGHTS

 $\boldsymbol{\cdot}$ Used to remove the slag from the crucible area of the mold after making a Cadweld connection

| Part Number | Mold Type |
|----------------|---|
| B136A | Most Cadweld molds using #65 welding material and smaller |
| B136B | Most Cadweld molds using #90 welding material and larger |
| B136D | Most Cadweld rail bond molds |
| B136E | Specific Cadweld molds only (See mold requirements to determine need) |
| B136F | Specific Cadweld molds only (See mold requirements to determine need) |

CADWELD TOOL KIT



FEATURED HIGHLIGHTS

• Convenient tool kits for Cadweld connection installations

| Part Number | Product |
|----------------|--------------------------|
| T315 | Standard Kit |
| T315A | Complete Kit |
| T343 | Heavy-Duty Kit |
| T343R | Heavy-Duty Kit with Rasp |

TORCH HEAD



- Self-igniting propane torch head
- Squeezing the control knob produces an instant flame; releasing it extinguishes the flame
- · No flame adjusting
- Burn tip remains cool during normal use
- Operates on its side or upside down
- Can withstand 60 MPH (96 KPH) winds without flareout
- Fits all standard 14.1 and 16.4 ounce (400 and 465 gram) propane cylinders

| Part Number | | |
|----------------|--|--|
| T111 | | |



- Metal box with removable tote tray
- Recommended for carrying tools, molds, welding material and propane torch used to make Cadweld connections

| Part Number | Length | Width | Height |
|----------------|--------|-------|--------|
| T396 | 19" | 7" | 7 1/2" |

TOOL TRAY



FEATURED HIGHLIGHTS

• Ideal for carrying one or two molds, welding material, propane torch and tools

| Part Number | | | |
|----------------|--|--|--|
| T331 | | | |

RASP



- Used to remove rust from steel surfaces or to remove galvanizing from hot dipped galvanized steel to expose the bare steel for welding
- Curved blade makes it an efficient tool for flat surfaces

| Part Number | | |
|----------------|-------------------|--|
| Number | Product | |
| T321 | Rasp | |
| T321A | Replacement Blade | |

WELDING TRAY



FEATURED HIGHLIGHTS

- Recommended when using Cadweld overhead or over expensive equipment
- Designed to contain a potential spill of molten weld metal


| Part Number | Height | Length | Width |
|----------------|--------|---------|-------|
| XLB974B2 | 3 1/4" | 13 1/4" | 7" |

CERAMIC BLANKET



FEATURED HIGHLIGHTS

• Woven ceramic blanket that can be used to hold a hot mold or keep the work surface free of slag when cleaning the mold





- Provides protection against moderate impact hazards
- May be worn separately or over prescription glasses

Material: Polycarbonate

Part Number

T393

As with all tasks, nVent ERICO recommends users consider safety first when making Cadweld connections and wear appropriate safety equipment.

CANVAS GLOVE WITH LEATHER PALM



FEATURED HIGHLIGHTS

Heavy canvas gloves with leather palms

Part Number

T378L

As with all tasks, nVent ERICO recommends users consider safety first when making Cadweld connections and wear appropriate safety equipment.

Technical Charts

CONCENTRIC STRANDED CONDUCTOR SIZES

| Size | | | Nominal O.D. | Approx, O.D. | Approx, O.D. | Weight | Cadweld |
|---------------------|---------------|------------|--------------|--------------|--------------|-----------|------------|
| (AWG/MCM/mm²) | Circular Mils | Stranding | of Strand | (inches) | (mm) | (lbs/mft) | Cable Code |
| 8 AWG | 16,510 | Solid | _ | 0.1285 | 3.26 | 50.0 | 1D |
| 8 AWG | 16,510 | 7/.0486" | 0.0486 | 0.1460 | 3.71 | 50.1 | 1E |
| 6 AWG | 26,240 | Solid | _ | 0.1620 | 4.11 | 79.5 | 1G |
| 6 AWG | 26,240 | 7/.0612" | 0.0612 | 0.1840 | 4.67 | 81.1 | 1H |
| 16 mm ² | 31,600 | 7/1.17 | 0.0461 | 0.2010 | 5.11 | 96.1 | W3 |
| 4 AWG | 41.740 | Solid | - | 0.2043 | 5.19 | 126.3 | 1K |
| 4 AWG | 41,740 | 7/.0772" | 0.0772 | 0.2320 | 5.89 | 129.0 | 1L |
| 4 AWG | 41,740 | 19/.0469" | 0.0469 | 0.2350 | 5.97 | 129.0 | 1L |
| 25 mm ² | 49,300 | 7/2.14 mm | 0.0843 | 0.2530 | 6.43 | 152.5 | Y1 |
| 25 mm ² | 49,300 | 19/1.35 | 0.0531 | 0.2660 | 6.76 | 152.5 | Y1 |
| 2 AWG | 66,360 | Solid | _ | 0.2576 | 6.54 | 200.9 | 1T |
| 2 AWG | 66,360 | 7/.0974" | 0.0974 | 0.2920 | 7.42 | 204.9 | 1V |
| 2 AWG | 66,360 | 19/.0591" | 0.0591 | 0.2920 | 7.42 | 205.0 | 1V |
| 35 mm ² | 66,360 | 19/1.53 mm | 0.0602 | 0.3010 | 7.65 | 211.0 | Y2 |
| 50 mm ² | 98,500 | 19/1.78 mm | 0.0701 | 0.3500 | 8.89 | 287.6 | Y3 |
| 1/0 AWG | 105,600 | Solid | - | 0.3249 | 8.25 | 319.5 | 2B |
| 1/0 AWG | 105,600 | 7/.1228" | 0.1228 | 0.3690 | 9.37 | 326.0 | 2C |
| 1/0 AWG | 105,600 | 19/.0745" | 0.0745 | 0.3730 | 9.47 | 326.0 | 2C |
| 2/0 AWG | 133,100 | Solid | _ | 0.3648 | 9.27 | 402.8 | 2F |
| 2/0 AWG | 133,100 | 7/.1379" | 0.1379 | 0.4140 | 10.52 | 410.9 | 2G |
| 2/0 AWG | 133,100 | 19/.0837" | 0.0837 | 0.4190 | 10.64 | 410.9 | 2G |
| 70 mm ² | 138,000 | 19/2.14 mm | 0.0843 | 0.4210 | 10.69 | 415.3 | Y4 |
| 3/0 AWG | 167,800 | Solid | _ | 0.4096 | 10.40 | 507.8 | 2K |
| 3/0 AWG | 167,800 | 7/.1548" | 0.1548 | 0.4650 | 11.81 | 518.0 | 2L |
| 3/0 AWG | 167,800 | 19/.0940" | 0.0940 | 0.4700 | 11.94 | 518.0 | 2L |
| 95 mm ² | 187,000 | 37/1.78 mm | 0.0700 | 0.4910 | 12.47 | 576.5 | Y5 |
| 95 mm ² | 187,000 | 19/2.52 | 0.0992 | 0.4960 | 12.60 | 576.5 | Y5 |
| 4/0 AWG | 211,600 | Solid | - | 0.4600 | 11.68 | 610.5 | 2P |
| 4/0 AWG | 211,600 | 7/.1739" | 0.1739 | 0.5220 | 13.26 | 653.0 | 2Q |
| 4/0 AWG | 211,600 | 19/.1055" | 0.1055 | 0.5280 | 13.41 | 653.0 | 2Q |
| 120 mm ² | 237,000 | 37/2.03 mm | 0.0799 | 0.5600 | 14.22 | 737.1 | Y6 |
| 250 MCM | 250,000 | 19/.1147" | 0.1147 | 0.5750 | 14.61 | 771.0 | 2V |
| 250 MCM | 250,000 | 37/.0822" | 0.0822 | 0.5750 | 14.61 | 771.0 | 2V |
| 150 mm ² | 296,000 | 37/2.25 mm | 0.0886 | 0.6200 | 15.75 | 896.4 | Y7 |
| 300 MCM | 300,000 | 19/.1257" | 0.1257 | 0.6290 | 15.98 | 926.9 | ЗА |
| 300 MCM | 300,000 | 37/.0900" | 0.0900 | 0.6290 | 15.98 | 926.9 | ЗА |
| 185 mm ² | 365,000 | 27/2.52 mm | 0.0992 | 0.6950 | 17.65 | 1124.1 | Y8 |
| 400 MCM | 400,000 | 37/.1040 | 0.1040 | 0.7200 | 18.29 | 1235.2 | 3H |
| 240 mm ² | 474,000 | 61/2.25 mm | 0.0886 | 0.7970 | 20.24 | 1478.2 | Y9 |
| 500 MCM | 500,000 | 19/.1622" | 0.1622 | 0.8130 | 20.65 | 1544.0 | 3Q |
| 500 MCM | 500,000 | 37/.1162" | 0.1162 | 0.8130 | 20.65 | 1544.0 | 3Q |
| 750 MCM | 750,000 | 61/.1109" | 0.1109 | 0.9980 | 25.35 | 2316.0 | 4L |
| 500 mm ² | 987,000 | 61/3.20 mm | 0.1260 | 1.1340 | 28.80 | 2990.8 | W1 |
| 1000 MCM | 1,000,000 | 61/.1280" | 0.1280 | 1.1520 | 29.26 | 3088.0 | 4Y |
| | | | | | | | |

DSA COPPER-BONDED CONDUCTOR

| | kcmil | Copper Size* | Cadweld Cable Code |
|-------|--|--|---|
| .306 | 72.7 | 3 AWG | 9A |
| .385 | 115.6 | 1 | 9B |
| .433 | 145.7 | 1/0 | 9C |
| .486 | 183.8 | 2/0 | 9D |
| .546 | 231.7 | 3/0 | 9E |
| .572 | 248.8 | 3/0 | 9F |
| .613 | 292.2 | 4/0 | 9L |
| .642 | 313.7 | 4/0 | 9G |
| .721 | 395.5 | 250 Kcmil | 9H |
| .801 | 484.4 | 300 | 7W |
| .810 | 498.8 | 350 | 9J |
| .899 | 610.9 | 400 | 7V |
| .910 | 628.9 | 450 | 9K |
| 1.010 | 770.3 | 500 | 9M |
| | .385 .433 .486 .546 .572 .613 .642 .721 .801 .810 | .385 115.6 .433 145.7 .486 183.8 .546 231.7 .572 248.8 .613 292.2 .642 313.7 .721 395.5 .801 484.4 .810 498.8 .899 610.9 .910 628.9 | .385 115.6 1 .433 145.7 1/0 .486 183.8 2/0 .546 231.7 3/0 .572 248.8 3/0 .613 292.2 4/0 .642 313.7 4/0 .721 395.5 250 Kcmil .801 484.4 300 .810 498.8 350 .899 610.9 400 .910 628.9 450 |

^{*}Approximate based on fusing current calculations

BARE COPPER-BONDED CONDUCTOR

| Nominal Size | Material | Туре | Thread Size | Body Dia. | Cadweld Ground Rod Code |
|--|--|--|----------------|--------------|-------------------------------|
| | Copper- bonded | Sectional | | .505 | 14 |
| | Steel* | Adaterial Type Size Decoppersonded Sectional S | .500 | 14 | |
| 1/2" | Copper- bonded | Plain | | .475 | 15 |
| | Copper- bonded | Sectional | 1/2" | .447 | 13 |
| | Copper- bonded | Sectional | | .563 | 16 |
| | Steel* | Plain 5/8" .629 Plain .563 | .625 | 31 | |
| 5/8" | Copper- bonded | Plain | | .563 | 16 |
| | Copper- bonded | Sectional | | .682 | 18 |
| | Steel* | Type Size Dia. Ro Sectional .505 14 Plain 9/16" .500 14 Plain .475 15 Sectional 1/2" .447 13 Sectional .563 16 Plain .563 16 Sectional .682 18 Plain .682 18 Plain .682 18 Sectional .914 22 Plain 1" 1.000 37 | 33 | | |
| Copperbonded Copperbonded Copperbonded Steel* Copperbonded Steel* Copperbonded Copperbonded Copperbonded Copperbonded Steel* Steel* Copperbonded Steel* Copperbonded Steel* Copperbonded Copperbonded Copperbonded Copperbonded Copperbonded Copperbonded Copperbonded Steel* Steel* Copperbonded Steel* Copperbonded | Plain | | .682 | 18 | |
| | Steel* Plain 5/8" .62 Copperbonded Plain .56 Copperbonded Sectional .68 Steel* Plain 3/4" .75 Copperbonded Plain .68 Copperbonded Sectional .68 Copperbonded Sectional .69 | .914 | 22 | | |
| | Steel* | Plain | 1" | 1.000 | 37 |
| 5/8" 3/4" | Copper- bonded | Plain | | .914 | 22 |

^{*}Plain steel, stainless steel, stainless clad rods or galvanized steel.

RECTANGULAR COPPER BUSBAR

| Thickness (inches) | Width (inches) | Circular Mil Size | Weight (lbs per foot) | Cadweld Busbar Code |
|--------------------|-------------------|----------------------|-----------------------------|---------------------------|
| | 1 | 159,200 | .484 | CE |
| | 1-1/2 | 238,700 | .726 | CG |
| 1/0 | 2 | 318,300 | .969 | CH |
| | 1 | 238,700 | .727 | DE |
| 3/16 | 2 | 477,500 | 1.45 | DH |
| | 1 | 318,300 | .969 | EE |
| | 1-1/2 | 477,500 | 1.45 | EG |
| | 2 | 636,600 | 1.94 | EH |
| | 3 | 954,900 | 2.91 | EK |
| 1/4 | 4 | 1,273,000 | 3.88 | EM |
| | 1 | 477,500 | 1.45 | GE |
| | 1-1/2 | 716,200 | 2.18 | GG |
| | 2 | 954,900 | 2.91 | GH |
| 2/0 | 3 | 1,432,000 | 4.36 | GK |
| 3/8 | 4 | 1,910,000 | 5.81 | GM |
| | 2 | 1,273,000 | 3.88 | JH |
| 1/0 | 3 | 1,910,000 | 5.81 | JK |
| 1/2 | 4 | 2,546,000 | 7.75 | JM |

REINFORCING BARS

| | Nominal Dimensions | | | | | | |
|----------------|--------------------|--|--------------------------------|--------------------------|--|--|--|
| Rebar Sizes | Dia. (inches) | Cross- Secitonal Area (Sq. inches) | Equivalent Copper Sizes* | Cadweld Rebar Code | | | |
| 3 | .375 | .11 | 9 AWG | 51 | | | |
| 4 | .500 | .20 | 7 | 52 | | | |
| 5 | .625 | .31 | 5 | 53 | | | |
| 6 | .750 | .44 | 3 | 54 | | | |
| 7 | .875 | .60 | 2 | 55 | | | |
| 8 | 1.000 | .79 | 1 | 56 | | | |
| 9 | 1.128 | 1.00 | 1/0 | 57 | | | |
| 10 | 1.270 | 1.27 | 2/0 | 58 | | | |
| 11 | 1.410 | 1.56 | 3/0 | 59 | | | |
| 14 | 1.693 | 2.25 | 250 kcmil | 60 | | | |
| 18 | 2.257 | 4.00 | 450 | 61 | | | |

^{*}Based on 8% IACS, rounded to the next higher commercial copper size.

Useful Conversions

Area

Square Inches x 1273 = kcmil Square Millimeters x 1.974 = kcmil kcmil x 0.5067 = Square Millimeters

Density

Copper: 0.323 lb/in3 Steel: 0.283 lb/in3

STEEL PIPE SIZES

Standard Weight ASTM® A53-90-B (Schedule 40) ANSI®/ASME® B36.10M-1985

| Nominal Size (inches) | O.D. (inches) | OD (mm) | Wall Thickness (inches) | Cadweld Mold Code |
|-----------------------|------------------|---------|----------------------------|----------------------|
| 1 | 1.315 | 33.4 | .133 | 1 |
| 1-1/4 | 1.660 | 42.1 | .140 | 1.25 |
| 1-1/2 | 1.900 | 48.2 | .145 | 1.50 |
| 2 | 2.375 | 60.3 | .154 | 2 |
| 2-1/2 | 2.875 | 73.0 | .203 | 2.50 |
| 3 | 3.500 | 88.9 | .216 | 3 |
| 3-1/2 | 4.000 | 101.6 | .226 | 3.50 |
| 4 | 4.500 | 114.3 | .237 | 4 |
| 5 | 5.563 | 141.3 | .258 | 5 |
| 6 | 6.625 | 168.2 | .280 | 6 |
| 8 | 8.625 | 219.0 | .322 | 8 |
| 10 | 10.750 | 273.0 | .365 | 10 |

OTHER STANDARD SECTIONS USED FOR FENCE POSTS

| Section | Cadweld Mold Code |
|--------------------------|-------------------|
| 1-1/2" square | PS15 |
| 2" square | PS20 |
| 2-1/2" square | PS25 |
| 3" square | PS30* |
| 1.875 x 1.625 x .133 "H" | PH1 |
| 2.25 x 1.95 .143 "H" | PH2 |

^{*}For D or F mold price only.

Index

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|-------------|------|-----------|------|-------------|------|-----------------|------|-----------------|------|
| 15 | 236 | 613480 | 114 | 635880 | 116 | A238EC2S12LH | 90 | A239HB2S242Q1RH | 92 |
| 15PLUSF20 | 236 | 613483 | 114 | 635883 | 116 | A238EC2S12RH | 90 | A239HC2S182C5LH | 92 |
| 25 | 236 | 613840 | 114 | 663400 | 141 | A238EC2S24LH | 90 | A239HC2S182C5RH | 92 |
| 25PLUSF20 | 236 | 613840UPC | 114 | 681300 | 117 | A238EC2S24RH | 90 | A239HC2S182Q6LH | 92 |
| 32 | 236 | 613850 | 114 | 681300S | 118 | A238FC2S12LH | 90 | A239HC2S242C4LH | 92 |
| 32PLUSF20 | 237 | 613860 | 114 | 683400 | 117 | A238FC2S12RH | 90 | A239HC2S242C4RH | 92 |
| 45 | 236 | 613880 | 114 | 683400S316 | 118 | A238FC2S16LH | 90 | A239HC2S242C10L | 92 |
| 45PLUSF20 | 237 | 614400 | 114 | 683412 | 117 | A238FC2S16RH | 90 | A239HC2S242C10R | 92 |
| 65 | 236 | 615800 | 114 | 683450 | 117 | A238FC2S18LH | 90 | A239HC2S242G4LH | 92 |
| 65PLUSF20 | 237 | 615800UPC | 114 | 683450S | 118 | A238FC2S18RH | 90 | A239HC2S242G5LH | 92 |
| 90 | 236 | 615803 | 114 | 683480 | 117 | A238FC2S24LH | 90 | A239HC2S242G5RH | 92 |
| 90PLUSF20 | 237 | 615812 | 114 | 684400 | 117 | A238FC2S24RH | 90 | A239HC2S242G30L | 92 |
| 115 | 236 | 615815 | 114 | 684400S | 118 | A238FD2S18LH | 90 | A239HC2S242G30R | 92 |
| 115PLUSF20 | 236 | 615823 | 114 | 684415 | 117 | A238FD2S18RH | 90 | A239HC2S242Q2LH | 92 |
| 150 | 236 | 615830 | 114 | 685800 | 117 | A238FF2S12RH | 90 | A239HC2S242Q2RH | 92 |
| 150PLUSF20 | 236 | 615840 | 114 | 685800S | 118 | A238GC2S12LH | 90 | A239HD2S242Q2LH | 92 |
| 200 | 236 | 615840UPC | 114 | 685880 | 117 | A238GC2S12RH | 90 | A239HD2S242Q2RH | 92 |
| 200PLUSF20 | 236 | 615843 | 115 | 685880S | 118 | A238GC2S18LH | 90 | A239HD2S242Q5LH | 92 |
| 250 | 236 | 615850 | 115 | 685880UPC | 117 | A238GC2S18RH | 90 | A239HD2S242Q5RH | 92 |
| 250PLUSF20 | 236 | 615853 | 115 | 710090 | 163 | A238GC2S24LH | 90 | A239KD2S242Q4RH | 92 |
| 300PLUSF20 | 237 | 615860 | 115 | 710100 | 163 | A238GC2S24RH | 90 | A800A09F65 | 107 |
| 400PLUSF20 | 237 | 615860UPC | 115 | 811260UPC | 121 | A238GD2S24RH | 90 | A800A09F100 | 107 |
| 500 | 236 | 615863 | 115 | 811280UPC | 121 | A238HB2S18LH | 90 | A800A22F100 | 107 |
| 500PLUSF20 | 237 | 615880 | 115 | 811350 | 121 | A238HB2S18RH | 91 | A809A06F100 | 107 |
| 600PLUSF20 | 237 | 615880UPC | 115 | 811360 | 121 | A238HC2S24LH | 90 | A811A26F50 | 110 |
| 750PLUSF20 | 237 | 615883 | 115 | 811380 | 121 | A238HD2S24RH | 91 | A811A26F500 | 110 |
| 1250PLUSF20 | 236 | 615883UPC | 115 | 813400 | 121 | A238KC2S24LH | 90 | A811A26W4F500 | 110 |
| 50010EBOSS | 72 | 625850 | 115 | 813400UPC | 121 | A238KC2S24RH | 91 | A811C20F20 | 110 |
| 158100 | 163 | 631300 | 115 | 813480 | 121 | A238KD2S24RH | 91 | A811C20F100 | 110 |
| 158110 | 163 | 631303 | 115 | 814400 | 121 | A239DC2S242C4LH | 91 | ACB4000H1 | 258 |
| 158380 | 162 | 631340 | 115 | 815800 | 121 | A239EB2S242Q4RH | 92 | ACC4005H2 | 258 |
| 180380 | 255 | 631350 | 115 | 815800UPC | 121 | A239EC2S182Q6LH | 91 | ACC4007H3 | 258 |
| 545135 | 125 | 631360 | 115 | 815840 | 121 | A239EC2S242C4LH | 91 | ACC4035H8 | 258 |
| 545140 | 125 | 631380 | 115 | 815850 | 121 | A239EC2S242C4RH | 92 | ACC4035H9 | 258 |
| 545530 | 125 | 633400 | 115 | 815860 | 121 | A239EC2S242G8LH | 91 | ACC4061H1 | 258 |
| 611300 | 114 | 633403 | 115 | 815860UPC | 121 | A239EC2S242Q4LH | 91 | ACC4061H2 | 258 |
| 611300UPC | 114 | 633415 | 115 | 815880 | 121 | A239EC2S242Q4RH | 92 | ACC4061H3 | 258 |
| 611303 | 114 | 633430 | 115 | 815880UPC | 121 | A239FC2S122G24R | 92 | ACC4061H4 | 258 |
| 611330 | 114 | 633440 | 115 | A235C2C1LH | 89 | A239FC2S242C2LH | 91 | ACC4062H1 | 258 |
| 611340 | 114 | 633450 | 115 | A235D2G2RH | 89 | A239FC2S242C2RH | 92 | B101AA | 240 |
| 611350 | 114 | 633460 | 115 | A235D2G4LH | 89 | A239FC2S242G4LH | 91 | B101CE | 240 |
| 611353 | 114 | 633463 | 115 | A235D2Q4LH | 89 | A239FC2S242G4RH | 92 | B101CEOL | 242 |
| 611360 | 114 | 633470 | 115 | A235D2Q4RH | 89 | A239FC2S242G5LH | 91 | B101DE | 240 |
| 611360UPC | 114 | 633480 | 115 | A235D2Q5LH | 89 | A239FC2S242G5RH | 92 | B101DEOL | 242 |
| 611380 | 114 | 634400 | 116 | A235D2Q5RH | 89 | A239FC2S242Q2LH | 92 | B101EE | 240 |
| 611380UPC | 114 | 635800 | 116 | A235E2G4LH | 89 | A239FC2S242Q4LH | 92 | B101EEOL | 242 |
| 613400 | 114 | 635803 | 116 | A235E2Q2RH | 89 | A239FC2S242Q4RH | 92 | B101EG | 240 |
| 613400UPC | 114 | 635830 | 116 | A235E2Q4LH | 89 | A239FC2S242Q8LH | 92 | B101EGOL | 242 |
| 613403 | 114 | 635837 | 117 | A235E2Q5LH | 89 | A239FC2S242Q10L | 91 | B101GG | 240 |
| 613412 | 114 | 635840 | 116 | A235E2Q5RH | 89 | A239FD2S241V1LH | 92 | B101GGOL | 242 |
| 613415 | 114 | 635843 | 116 | A235F2C2LH | 89 | A239FD2S242G4LH | 92 | B101GH | 240 |
| 613440 | 114 | 635850 | 116 | A235G2Q2RH | 89 | A239FD2S242G4RH | 92 | B101GHOL | 242 |
| | | | | | | | | | |
| 613450 | 114 | 635860 | 116 | A235H2C10RH | 89 | A239GC2S242Q4LH | 92 | B101JH | 240 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|----------------------|------|-----------------|------|------------------------|------|----------------------|-----------|----------------------|------|
| B101QQOL | 242 | B141A | 257 | B522K | 87 | B532E3Q48 | 139 | B2131L44 | 245 |
| B101SQOL | 242 | B141C | 257 | B530A1L12 | 138 | B532E3Q96 | 139 | B2131V18 | 245 |
| B102CE | 241 | B142A | 258 | B530A1V12 | 138 | B533A2G48 | 139 | B2131V36 | 245 |
| B102CEOL | 242 | B142B | 258 | B530A2Q48 | 138 | B533A2Q24 | 139 | B2132G11 | 245 |
| B102DE | 241 | B143A | 258 | B530A2Q72 | 138 | B533C2Q48 | 139 | B2132G14 | 245 |
| B102DEOL | 242 | B143B | 258 | B530B2G24 | 138 | B533D2Q12 | 139 | B2132Q18 | 245 |
| B102EE | 241 | B144A | 258 | B530C1L048 | 138 | B533D2Q24 | 139 | B2132Q36 | 245 |
| B102EEOL | 242 | B144B | 258 | B530C2C24 | 138 | B533D2Q48 | 139 | B2132Q48 | 245 |
| B102EFOL | 242 | B144C | 258 | B530C2G48 | 138 | B548A39 | 153 | B2132Q54 | 245 |
| B102EG | 241 | B144D | 258 | B530C2Q36 | 138 | B548A41 | 153 | B2132Q60 | 245 |
| B102EGOL | 242 | B144E | 258 | B530C2Q48 | 138 | B548A42 | 153 | B2132V18 | 245 |
| B102EH | 241 | B144M | 258 | B530C2Q96 | 138 | B802D01A5 | 111 | B2162C72 | 245 |
| B102EHOL | 242 | B144Q | 258 | B530D2C48 | 138 | B802D01A12 | 111 | B2162C96 | 245 |
| B102GG | 241 | B145A | 259 | B530D2G18 | 138 | B802D01A24 | 111 | B2162Q8 | 245 |
| B102GGOL | 242 | B158 | 248 | B530D2G24 | 138 | B802D01A36 | 111 | B2162Q24 | 245 |
| B102GH | 241 | B159H | 247 | B530D2G48 | 138 | B802D01A48 | 111 | B2171L24 | 245 |
| B102GH0L | 242 | B159M | 247 | B530D2G48 | 138 | B802D01A48 | 111 | B2171C24 | 245 |
| B102GHOL | 242 | B159V | 247 | B530D2Q12 | 138 | B827A | 250 | B2172G24 | 245 |
| B102JH B102JHOL | 241 | B159V B159VT | 247 | B530D2Q12 B530D2Q24 | 138 | B852A8C1G48 | 250 85 | B2172G24 B2172Q12 | 245 |
| B102JHOL B102QQOL | 242 | | 247 | B530D2Q24 | 138 | B852A8C1G48 | 85 85 | | 245 |
| | | B160B | | | | | | B2172Q24 | |
| B103DEOL | 243 | B160H | 247 | B530D2Q36 | 138 | B852A12C1G96 | 85 | B2182Q30 | 245 |
| B104EK | 241 | B160V | 247 | B530D2Q48 | 138 | B852A12C2Q60 | 85 | B2192C12 | 245 |
| B104EKOL | 243 | B160VT | 247 | B530D2Q72 | 138 | B922CC14A | 244 | B2192Q08 | 246 |
| B104GK | 241 | B165 | 140 | B530D2Q96 | 138 | B922CC14B | 244 | B2192Q12 | 246 |
| B104GKOL | 243 | B165B | 140 | B530D2Q120 | 138 | B922CC14C | 244 | B2610A | 143 |
| B104JK | 241 | B165R | 140 | B530D2Q144 | 138 | B922CC38B | 244 | B2617A | 142 |
| B104JKOL | 243 | B165RS | 140 | B530D2Q180 | 138 | B922CC38C | 244 | B2618A | 143 |
| B112 | 256 | B166 | 139 | B531A2Q36 | 138 | B922CE716B | 244 | B2618B | 143 |
| B117A | 253 | B166B | 141 | B531D2G24 | 138 | B1331H | 256 | B13714 | 162 |
| B117B | 253 | B167 | 139 | B531D2Q6 | 139 | B1331K | 256 | B13716 | 162 |
| B117C | 253 | B167B | 141 | B531D2Q12 | 139 | B1331L | 256 | B13716RH15 | 161 |
| B120 | 253 | B265 | 252 | B531D2Q24 | 139 | B1331V | 256 | B13718 | 162 |
| B121CE | 243 | B305SS | 242 | B531D2Q48 | 139 | B1331Y | 256 | B13722 | 162 |
| B121DE | 243 | B305TC | 242 | B531D2Q72 | 139 | B1332C | 256 | B13731 | 162 |
| B121EE | 243 | B319 | 249 | B531D2Q96 | 139 | B1332G | 256 | B13733 | 162 |
| B121EG | 243 | B320 | 249 | B531D2Q120 | 139 | B1332L | 256 | B13737 | 162 |
| B121QQ | 243 | B323N2 | 248 | B531D2Q144 | 139 | B1332Q | 256 | B32130 | 262 |
| B121SQ | 243 | B396 | 247 | B532A2Q48 | 139 | B1612Q | 135 | BACCA | 215 |
| B122CE | 244 | B399A | 250 | B532C2G24 | 139 | B1613Q | 135 | BACCE | 215 |
| B122DE | 244 | B399AM | 252 | B532C2G60 | 139 | B1622Q | 134 | BACDE | 215 |
| B122EE | 244 | B399AS | 251 | B532C2Q48 | 139 | B1642Q | 135 | BACEE | 215 |
| B122EG | 244 | B399B | 250 | B532C2Q240 | 139 | B1643Q | 135 | BACEH | 215 |
| B123CE03 | 244 | B399BM | 252 | B532C2V48 | 139 | B2121L8 | 245 | BADEK | 215 |
| B123EG03 | 244 | B399BS | 251 | B532C3Q48 | 139 | B2121V12 | 245 | BADEM | 215 |
| B134 | 249 | B399C | 250 | B532D1L48 | 139 | B2122G16 | 245 | BADGK | 215 |
| B135 | 249 | B399CS | 251 | B532D1V36 | 139 | B2122Q20 | 245 | BBCCE | 215 |
| B136A | 265 | B399DS | 251 | B532D2C24 | 139 | B2122Q24 | 245 | BBCEF | 215 |
| B136B | 265 | B399ES | 251 | B532D2C36 | 139 | B2131L15 | 245 | BBCEG | 215 |
| B136D | 265 | B399Q | 250 | B532D2G12 | 139 | B2131L20 | 245 | BBDEHEH | 215 |
| B136E | 265 | B522B | 87 | B532D2G48 | 139 | B2131L22 | 245 | BBFEK | 215 |
| B136F | 265 | B522C | 87 | B532D2Q48 | 139 | B2131L24 | 245 | BCR8T | 65 |
| B140A | 257 | B522D | 87 | B532D2Q30 | 139 | B2131L24 B2131L28 | 245 | BMCCECE | 216 |
| B140A B140B | 257 | B522E | 87 | | 139 | | 245 | | 216 |
| | | | | B532D2Q48 | | B2131L32 | | BMCCGCG | |
| B140K | 257 | B522F | 87 | B532D2Q50 | 139 | B2131L35 | 245 | BMCDEDE | 216 |
| B140L | 257 | B522G | 87 | B532D2Q72 | 139 | B2131L38 | 245 | BMDCHCH | 216 |
| B140N | 257 | B522H | 87 | B532E3D96 | 139 | B2131L42 | 245 | BMDEKEK | 216 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | |
|--------------|------|------------------------------|------|--------------|------|-----------------|------|--------------|---|
| BMKEMEM | 216 | CPI25-200-10 | 108 | CWP4JH34 | 83 | EHL12FC1K | 56 | EPGC143120 | |
| | | | | | | | 56 | | |
| BQDEHEH | 216 | CPI25-250-10 | 108 | CWP6J | 81 | EHL12FC1K1K | | EPGC144120 | |
| BQDEKEK | 216 | CPI25-300-10 | 108 | DH12M | 162 | EHL12FC1V | 56 | EPGC182120 | |
| BWCCG | 218 | CPI25-400-10 | 108 | DH34 | 161 | EHL12FC2G | 56 | EPGC183144 | |
| BWCDE | 218 | CPI25-600-10 | 108 | DH34M | 162 | EHL34C1K | 56 | EPGC184120 | |
| BWCDG | 218 | CPI35-150-12 | 108 | DH58 | 161 | EHL34C1V | 56 | EPT1225300 | |
| BWCEF | 218 | CPI35-200-12 | 108 | DH58M | 162 | EHL34C2G | 56 | EPT1425350 | |
| BWDJH | 218 | CPI35-250-12 | 108 | DM5834 | 142 | EHL34G1K | 56 | EPT1435350 | |
| CBNJ09 | 96 | CPI35-300-12 | 108 | DS1 | 163 | EHL34G1V | 56 | EPT1450350 | |
| CBNJ09P10 | 96 | CPI35-400-12 | 108 | DS12 | 163 | EHL34SG1K | 56 | ESB2 | |
| CBSC8 | 102 | CPI35-600-12 | 108 | DS12S | 163 | EHL34SG1V | 56 | ESB2/0 | |
| CBSC8A | 102 | CPI50-150-12 | 108 | DS34 | 163 | EHL58C1K | 56 | ESB4 | |
| CBSC8B | 102 | CPI50-200-12 | 108 | DS58 | 163 | EHL58C1K1K | 56 | ESB4/0 | |
| CBSC10 | 102 | CPI50-250-12 | 108 | DS58C | 163 | EHL58C1V | 56 | ESB6 | |
| CBSC10A | 102 | CPI50-300-12 | 108 | DSCC58 | 162 | EHL58C2G | 56 | ESB8 | |
| CBSC10B | 102 | CPI50-400-12 | 108 | EBGP | 134 | EHL58G1K | 56 | ESBP1/0 | |
| CBSC13 | 102 | CPI50-600-12 | 108 | EBL08 | 157 | EHL58G1K1K | 56 | ESBP2 | |
| BSC13A | 102 | CPI70-150-12 | 108 | ECRCHM15LB | 120 | EHL58G1V | 56 | ESBP2/0 | |
| BSC13B | 102 | CPI70-200-12 | 109 | EDS12 | 162 | EHL58G2G | 56 | ESBP4 | |
| BSC14 | 102 | CPI70-250-12 | 109 | EDS58 | 162 | EK16 | 92 | ESBP4/0 | |
| BSC14A | 102 | CPI70-250-12 CPI70-300-12 | 109 | EGBA14112EE | 149 | EK17 | 92 | ESBP6 | |
| | | | | | | | 93 | | |
| BSC14B | 102 | CPI70-400-12 | 109 | EGBA14212BB | 149 | EL4 | | ESBP8 | |
| BSC16 | 102 | CPI70-600-12 | 109 | EGBA14212EE | 149 | EL6CADB | 69 | ESBP350 | |
| BSC16A | 102 | CPI70-800-12 | 109 | EGBA14212HH | 149 | EL6CS | 70 | ESR182 | |
| BSC16B | 102 | CPI70-1100-12 | 108 | EGBA14212NN | 149 | EL6CS8 | 70 | EST401 | |
| BSC18 | 102 | CR12S | 64 | EGBA14212TES | 149 | EL6CSDB | 70 | EST4620 | |
| BSC18A | 102 | CR34 | 64 | EGBA14215JJ | 149 | EL6CSDB8 | 70 | EST4630 | |
| BSC18B | 102 | CR34SS | 64 | EGBA14215TES | 149 | EL6CSDBNH | 70 | EST6472 | |
| BSCSSM | 105 | CR58 | 64 | EGBA14224NN | 149 | EL6CSNH | 70 | ESTREELKIT50 | 0 |
| BSCSSMT | 105 | CR58CE | 64 | EGBA14406CC | 149 | EMMCU080X36X96A | 128 | ETMAGS | |
| C5A05CB | 106 | CR58SS | 64 | EGBA14410FF | 149 | EPCCE | 217 | EVC167P | |
| C5A20CB | 106 | CR100 | 64 | EGBA14412AA | 149 | EPCCH | 217 | EWB2G9164 | |
| C5A40CB | 106 | CSS0810000 | 97 | EGBA14412BB | 149 | EPCCK | 217 | EWB2L584 | |
| C12F | 62 | CSS0810050 | 98 | EGBA14412CC | 149 | EPCEE | 217 | EWB2Q344 | |
| C34 | 62 | CSS0810150 | 98 | EGBA14412GG | 149 | EPCEH | 217 | EWBCS701 | |
| C34SS | 63 | CSS1314000 | 97 | EGBA14412LL | 149 | EPDCM | 217 | FC073 | |
| C58 | 62 | CSS1314050 | 98 | EGBA14412MM | 149 | EPDEM | 217 | FC074 | |
| C58SS | 63 | CSS1314150 | 98 | EGBA14412NN | 149 | EPDGM | 217 | FC075 | |
| C207 | 71 | CSS1618000 | 97 | EGBA14420CC | 149 | EPGA142120 | 153 | FC076 | |
| CCEH | 218 | CSS1618050 | 98 | EGBA14420CCT | 149 | EPGA144120 | 153 | FC076DH | |
| CL04A | 99 | CTR8CU | 75 | EGBA14420NN | 149 | EPGC1416X6 | 151 | FC078 | |
| CSS14 | 63 | CTR10 | 75 | EGBA14424CC | 149 | EPGC1418X8FL | 152 | FC078DH | |
| FCDELH | 219 | CWP1J | 81 | EGBA14424GG | 149 | EPGC1426X6 | 151 | FC079 | |
| FDEHRH | 219 | CWP1JH12 | 83 | EGBA14424LL | 149 | EPGC1428X8 | 151 | FC080 | |
| GE5CP | 116 | CWP1JH34 | 83 | EGBA14424MM | 149 | EPGC1436X6 | 151 | FC082 | |
| GE51K | 116 | CWP1JJ | 81 | EGBA14424NN | 149 | EPGC1446X6 | 151 | FC082DH | |
| P34 | 57 | CWP1JSH | 81 | EGBA14436CC | 149 | EPGC1446X6T | 152 | FJ1T18 | |
| | | | | | | | | | |
| P38 | 57 | CWP1JU | 81 | EGGP | 134 | EPGC1816X6 | 152 | FJ1T24 | |
| P58 | 57 | CWP2J | 81 | EGGPC | 134 | EPGC1818X8FL | 152 | FJ1T42 | |
| PI16-150-8 | 108 | CWP2JH34 | 83 | EGP100 | 133 | EPGC1826X6 | 152 | FJ1T96 | |
| PI16-200-8 | 108 | CWP2JH44 | 83 | EGP100HL | 133 | EPGC1828X8FL | 152 | FJ1T240 | |
| PI16-250-8 | 108 | CWP2JSH | 81 | EGRA15 | 104 | EPGC1846X6 | 152 | FJ2G12 | |
| PI16-300-8 | 108 | CWP2JU | 81 | EGRD34 | 160 | EPGC1848X8FL | 152 | FJ2G16 | |
| CPI16-400-8 | 108 | CWP3J | 81 | EGRD34I | 160 | EPGC141120 | 152 | FJ2G18 | |
| CPI16-600-8 | 108 | CWP3JSH | 81 | EGRD58 | 160 | EPGC142120 | 152 | FJ2G24 | |
| CPI25-150-10 | 108 | CWP4J | 81 | EGRD58I | 160 | EPGC142144 | 152 | FJ2G30 | |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|-----------|------|-----------------|------|-------------|------|---------|------|-------------|------|
| FJ2G36 | 88 | GLCEG1V | 209 | GPECNED014 | 131 | GRC161Y | 184 | GRP161V | 185 |
| FJ2G72 | 88 | GLCEG2C | 209 | GPECNED096 | 131 | GRC162C | 184 | GRP181K | 185 |
| FJ2G84 | 88 | GLCEG2G | 209 | GPECNEG024 | 131 | GRC162G | 184 | GRP181L | 185 |
| FJ2G96 | 88 | GLCEG2Q | 209 | GPECNEH016 | 131 | GRC162Q | 184 | GRP181V | 185 |
| FJ2G120 | 88 | GLCEG2V | 209 | GPECNEK024 | 131 | GRC162V | 184 | GRP331K | 185 |
| FJ2G132 | 88 | GLCEG3H | 209 | GPECNEM040 | 131 | GRC163A | 184 | GRP331L | 185 |
| FJ2G144 | 88 | GLCEG3Q | 209 | GPECNEN040 | 131 | GRC163D | 184 | GRP371K | 185 |
| FJ2G168 | 88 | GLPCC1T | 209 | GPECNFH033 | 131 | GRC163H | 184 | GRP371L | 186 |
| FJ2G180 | 88 | GNR161H | 194 | GPECNFK024 | 131 | GRC163Q | 184 | GRT14A1G | 186 |
| FJ2G228 | 88 | GNR161T | 194 | GPECNGF012 | 131 | GRC181G | 184 | GRT14A1H | 186 |
| | | GNR161V | 194 | GPECNGK024 | | GRC181H | 184 | | |
| FJ2G360 | 88 | | | | 131 | | | GRT14A1K | 186 |
| FJ2Q16 | 88 | GNR162C | 194 | GPECNHM096 | 131 | GRC181K | 184 | GRT14A1L | 186 |
| FJ2Q18 | 88 | GNR181H | 194 | GR1141G | 239 | GRC181L | 184 | GRT14A1T | 186 |
| FJ2Q24 | 88 | GNR181T | 194 | GR1141GPLUS | 238 | GRC181T | 184 | GRT14A1V | 186 |
| FJ2Q36 | 88 | GPECCAM036 | 131 | GR1141L | 239 | GRC181V | 184 | GRT14B1G | 186 |
| FJ2Q48 | 88 | GPECCAM0361H024 | | GR1141LPLUS | 238 | GRC181Y | 184 | GRT14B1H | 186 |
| FJ2Q120 | 88 | GPECCBJ0181T024 | 131 | GR1141V | 239 | GRC182C | 184 | GRT14C1G | 186 |
| FJ2Q156 | 88 | GPECCBJ0181T060 | 131 | GR1141VPLUS | 238 | GRC182G | 184 | GRT14C1H | 186 |
| FJ2Q168 | 88 | GPECCBJ181T108S | 131 | GR1161G | 239 | GRC182Q | 184 | GRT14C1K | 186 |
| FJ2Q180 | 88 | GPECCDK0241L024 | 131 | GR1161GF | 239 | GRC182V | 184 | GRT14C1L | 186 |
| FJ2Q216 | 88 | GPECCDM0361T10T | 131 | GR1161GPLUS | 238 | GRC183A | 184 | GRT14C1T | 186 |
| FJ2Q240 | 88 | GPECCEK0242C036 | 131 | GR1161L | 239 | GRC183D | 184 | GRT14C1V | 186 |
| FJ2Q252 | 88 | GPECEAJ0181G024 | 131 | GR1161LPLUS | 238 | GRC183H | 184 | GT1141G | 239 |
| FJ2Q384 | 88 | GPECEAJ0241G024 | 131 | GR1161V | 239 | GRC183Q | 184 | GT1141GPLUS | 238 |
| FJ2Q600 | 88 | GPECEAK0241G024 | 131 | GR1161VPLUS | 238 | GRC184L | 184 | GT1141L | 239 |
| FJ2QA24 | 88 | GPECEAK0241H024 | 131 | GR1162C | 239 | GRC221T | 184 | GT1141LPLUS | 238 |
| GC064 | 58 | GPECEAK0242V024 | 131 | GR1162CPLUS | 238 | GRC221V | 184 | GT1141V | 239 |
| GC065 | 58 | GPECEAM0361H024 | 131 | GR1162G | 239 | GRC222C | 184 | GT1141VPLUS | 238 |
| GC065TH | 59 | GPECEAM0362V012 | | GR1162GPLUS | 238 | GRC222G | 184 | GT1142GPLUS | 238 |
| GCC34 | 63 | GPECEAP0481H024 | 131 | GR1162Q | 239 | GRC222Q | 184 | GT1161G | 239 |
| GCC58F | 63 | GPECEBH0121V024 | 131 | GR1162QPLUS | 238 | GRC222V | 184 | GT1161GPLUS | 238 |
| GEC14 | 183 | GPECEBH0241K024 | 131 | GR1181G | 239 | GRC223D | 184 | GT1161L | 239 |
| GEC16 | 183 | GPECEBQ0171G120 | 131 | GR1181GPLUS | 238 | GRC223Q | 184 | GT1161LF | 239 |
| GEC18 | 183 | GPECEDK0241L024 | 131 | GR1181L | 239 | GRC224L | 184 | GT1161LPLUS | 238 |
| GEC31 | 183 | GPECEDK02472024 | 131 | GR1181LPLUS | 238 | GRC311L | 185 | GT1161V | 239 |
| GEM25A | 122 | GPECEEK0241T024 | 131 | GR1181V | 239 | GRC311T | 185 | GT1161VF | 239 |
| GEM25ABKT | 122 | | | | 239 | GRC311V | 185 | | 239 |
| | | GPECEEK0242Q008 | 131 | GR1181VPLUS | | | | GT1161VPLUS | |
| GLCCE1G | 209 | GPECEEK0242Q060 | 131 | GR1182C | 239 | GRC312C | 185 | GT1162C | 239 |
| GLCCE1H | 209 | GPECEEK0242Q120 | 131 | GR1182CPLUS | 238 | GRC312G | 185 | GT1162CPLUS | 238 |
| GLCCE1K | 209 | GPECEEK0242Q180 | 131 | GR1182G | 239 | GRC312Q | 185 | GT1162G | 239 |
| GLCCE1L | 209 | GPECEEK0361T024 | 131 | GR1182GPLUS | 238 | GRC312V | 185 | GT1162GPLUS | 238 |
| GLCCE1T | 209 | GPECEHX1 | 132 | GR1182Q | 239 | GRC313Q | 185 | GT1181G | 239 |
| GLCCE1V | 209 | GPECEHX1T | 132 | GR1182QPLUS | 238 | GRC331H | 185 | GT1181GPLUS | 238 |
| GLCCE1Y | 209 | GPECEHX3 | 132 | GRC141V | 183 | GRC331L | 185 | GT1181L | 239 |
| GLCCE2C | 209 | GPECEJK0361T24T | 131 | GRC141Y | 183 | GRC331T | 185 | GT1181LPLUS | 238 |
| GLCCE2G | 209 | GPECNAJ018 | 131 | GRC142C | 183 | GRC331V | 185 | GT1181V | 239 |
| GLCCE2Q | 209 | GPECNAK024 | 131 | GRC142G | 183 | GRC332C | 185 | GT1181VPLUS | 238 |
| GLCDE1H | 209 | GPECNBH012 | 131 | GRC142Q | 183 | GRC332G | 185 | GT1182C | 239 |
| GLCDE2C | 209 | GPECNBH024 | 131 | GRC142V | 183 | GRC332Q | 185 | GT1182CPLUS | 238 |
| GLCDE2G | 209 | GPECNDF006 | 131 | GRC161E | 183 | GRC332V | 185 | GT1182G | 239 |
| GLCDE2Q | 209 | GPECNDH024 | 131 | GRC161G | 183 | GRC333Q | 185 | GT1182GPLUS | 238 |
| GLCDE2V | 209 | GPECNDK024T | 131 | GRC161H | 184 | GRC372C | 185 | GTC141G | 187 |
| GLCEE2Q | 209 | GPECNDM036T | 131 | GRC161K | 184 | GRC372G | 185 | GTC141T | 187 |
| GLCEE2V | 209 | GPECNEB024 | 131 | GRC161L | 184 | GRC372Q | 185 | GTC141V | 187 |
| GLCEE3A | 209 | GPECNED004 | 131 | GRC161T | 184 | GRD224Y | 185 | GTC142C | 187 |
| GLCEE3D | 209 | GPECNED012 | 131 | GRC161V | 184 | GRP141G | 185 | GTC142G | 187 |
| 0202200 | 200 | O. LUNEDUIZ | 101 | 331017 | 104 | 5 1119 | 130 | 0.01120 | 107 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|---------|------|----------|------|---------|------|-----------|------|-----------|------|
| GTC142Q | 187 | GTC372V | 188 | GYE162V | 191 | GYR142Q | 193 | HAA1V | 199 |
| GTC142V | 187 | GTC373Q | 189 | GYE163A | 191 | GYR161G | 193 | HAA1V7C | 199 |
| GTC143Q | 187 | GTD164L | 189 | GYE163D | 191 | GYR161H | 193 | HAA1V11C | 199 |
| GTC181K | 187 | GTD184L | 189 | GYE181G | 191 | GYR161L | 193 | HAA1V162C | 199 |
| GTC181L | 187 | GTD184Y | 189 | GYE181H | 191 | GYR161T | 193 | HAA1V350C | 199 |
| GTC181T | 187 | GTD224L | 189 | GYE181K | 191 | GYR161V | 193 | HAA1Y | 199 |
| GTC181V | 187 | GTD224Y | 189 | GYE181L | 191 | GYR162C | 193 | HAA1Y11C | 199 |
| GTC181Y | 187 | GTD374Y | 189 | GYE181T | 191 | GYR162G | 193 | HAA1Y325C | 199 |
| GTC182C | 187 | GTP161T | 189 | GYE181V | 191 | GYR162Q | 193 | HAH2C8C | 199 |
| GTC182G | 187 | GTP161V | 189 | GYE181Y | 191 | GYR162V | 193 | | 199 |
| | | | | | | | 193 | HAH2C20C | 199 |
| GTC182Q | 187 | GTP181G | 189 | GYE182C | 191 | GYR163A | | HAH2C350C | |
| GTC182V | 187 | GTP181H | 189 | GYE182G | 191 | GYR163D | 193 | HAH2G8C | 199 |
| GTC183A | 187 | GTP181K | 189 | GYE182Q | 192 | GYR181G | 193 | HAH2G20C | 199 |
| GTC183D | 187 | GTP181L | 189 | GYE182V | 192 | GYR181H | 193 | HAH2G350C | 199 |
| GTC183H | 187 | GTP181T | 189 | GYE189B | 192 | GYR181T | 193 | HAH2Q3C | 199 |
| GTC183Q | 187 | GTP181V | 189 | GYE222C | 192 | GYR181V | 193 | HAH2Q8C | 199 |
| GTC221K | 187 | GTP331G | 189 | GYE222G | 192 | GYR182C | 193 | HAH2Q20C | 199 |
| GTC221L | 187 | GTP331H | 189 | GYE222Q | 192 | GYR182G | 193 | HAH2Q350C | 199 |
| GTC221T | 187 | GTP331K | 189 | GYE222V | 192 | GYR182Q | 193 | HAH9D350C | 199 |
| GTC221V | 187 | GTP331L | 189 | GYE223D | 192 | GYR182V | 193 | HCA1G | 200 |
| GTC221Y | 187 | GTT14A1A | 189 | GYE311T | 192 | GYR183D | 193 | HCA1H | 200 |
| GTC222C | 187 | GTT14A1G | 189 | GYE311V | 192 | GYR312G | 193 | HCA1K | 200 |
| GTC222G | 187 | GTT14A1H | 189 | GYE312C | 192 | GYR331H | 193 | HCA1L | 200 |
| GTC222Q | 188 | GTT14A1K | 189 | GYE312G | 192 | GYR331V | 193 | HCA1T | 200 |
| GTC222V | 188 | GTT14A1L | 189 | GYE312Q | 192 | GYR332G | 193 | HCA1V | 200 |
| GTC223D | 188 | GTT14B1H | 190 | GYE312V | 192 | GYR332Q | 193 | HCA1Y | 200 |
| GTC223H | 188 | GTT14C1G | 190 | GYE331T | 192 | GYR332V | 193 | HDC1 | 57 |
| GTC223Q | 188 | GTT14C1H | 190 | GYE331V | 192 | H11F | 255 | HDC12 | 57 |
| GTC311L | 188 | GTT14C1K | 190 | GYE332C | 192 | H101 | 256 | HDC34 | 57 |
| GTC311T | 188 | GTT14C1L | 190 | GYE332G | 193 | H102 | 256 | HDC34SP | 57 |
| GTC311V | 188 | GTT161G | 190 | GYE332Q | 193 | H102F | 255 | HDC58 | 57 |
| GTC311Y | 188 | GTT161H | 190 | GYE332V | 191 | H103 | 256 | HDC58R | 57 |
| GTC312C | 188 | GTT161K | 190 | GYE372G | 191 | H105 | 256 | HDGBC14S | 182 |
| GTC312G | 188 | GTT161L | 190 | GYE372Q | 192 | H106AF | 255 | HDGBD16 | 182 |
| GTC312Q | 188 | GTT311G | 190 | GYE372V | 192 | H106F | 255 | HDGBD31 | 182 |
| GTC312V | 188 | GTT311H | 190 | GYF163Q | 192 | H113F | 255 | HDGBF18 | 182 |
| GTC313A | 188 | GTT311K | 190 | GYF183Q | 192 | H117 | 256 | HDGBF22 | 182 |
| GTC313D | 188 | GTT311L | 190 | GYF313H | 192 | HAA1G | 198 | HDGBF33 | 182 |
| GTC313H | 188 | GUV16070 | 60 | GYF313Q | 192 | HAA1G162C | 198 | HDGBF37 | 182 |
| GTC313Q | 188 | GUV70185 | 60 | GYF333Q | 192 | HAA1G350C | 198 | HDGBR12 | 182 |
| GTC331T | 188 | GYE141V | 191 | GYJ163H | 192 | НАА1Н | 198 | HDGBR15 | 182 |
| GTC331V | 188 | GYE142C | 191 | GYJ163Q | 192 | HAA1H7C | 199 | HSC1G | 200 |
| GTC331Y | 188 | GYE142G | 191 | GYJ164L | 192 | HAA1H11C | 198 | HSC1H | 200 |
| GTC332C | 188 | GYE142L | 191 | GYJ183D | 192 | HAA1H162C | 199 | HSC1L | 200 |
| GTC332G | 188 | GYE142Q | 191 | GYJ183H | 192 | HAA1H350C | 199 | HSC1T | 200 |
| | 188 | | 191 | | 192 | HAA1K | 199 | HSC1V | 200 |
| GTC332Q | | GYE142V | | GYJ183Q | | | | | |
| GTC332V | 188 | GYE161G | 191 | GYJ184L | 192 | HAA1K162C | 199 | HSC2C | 200 |
| GTC333A | 188 | GYE161H | 191 | GYJ223D | 192 | HAA1L | 199 | HSC2G | 200 |
| GTC333D | 188 | GYE161K | 191 | GYJ223Q | 192 | HAA1L7C | 199 | HSC2Q | 200 |
| GTC333H | 188 | GYE161L | 191 | GYJ224L | 193 | HAA1L11C | 199 | HSC2V | 200 |
| GTC333Q | 188 | GYE161Q | 191 | GYJ313Q | 193 | HAA1L162C | 199 | HTC1T | 201 |
| GTC371L | 188 | GYE161T | 191 | GYJ333D | 193 | HAA1L350C | 199 | HTC1V | 201 |
| GTC371V | 188 | GYE161V | 191 | GYJ333Q | 193 | HAA1T | 199 | HTC2C | 201 |
| GTC372C | 188 | GYE162C | 191 | GYJ373Q | 193 | HAA1T7C | 199 | HTC2G | 201 |
| GTC372G | 188 | GYE162G | 191 | GYR142C | 193 | HAA1T162C | 199 | HTC2Q | 201 |
| GTC372Q | 188 | GYE162Q | 191 | GYR142G | 193 | HAA1T350C | 199 | HTC2V | 201 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|-------------|------|----------|------|----------|------|------------|------|------------|------|
| IBTB | 158 | LAC1VCE | 210 | LAC3QEH | 211 | LJCEG3X | 213 | LPC571 | 83 |
| ICECH25 | 107 | LAC1VDE | 210 | LAC3QEK | 211 | LJCEG4L | 213 | LPC571L | 83 |
| ICECH50C | 107 | LAC1VEE | 210 | LAC3QEKW | 211 | LJCGG1L | 213 | LPC580 | 82 |
| ICECH70C | 107 | LAC1VEG | 210 | LAC3QGG | 211 | LJCGG1T | 213 | LPC580L | 82 |
| ICECH95C | 107 | LAC1YCE | 210 | LAC3QJH | 211 | LJCGG1V | 213 | LPC595NB | 75 |
| ICECH120C | 106 | LAC2C002 | 210 | LAC4LGG | 211 | LJCGG2C | 213 | LPC595NB13 | 75 |
| ICECH150C | 106 | LAC2CCE | 210 | LAD4LJK | 211 | LJCGG2G | 213 | LPC680 | 141 |
| ICECH185C | 106 | LAC2CDE | 210 | LAD4YJK | 211 | LJCGG2Q | 213 | LPC681 | 141 |
| | 107 | | | | | | | | |
| ICECH240C | | LAC2CEE | 210 | LAT1HAA | 211 | LJCGG2V | 213 | LPC682 | 135 |
| IP900C | 124 | LAC2CEG | 210 | LAT1LAA | 211 | LJCGG3D | 213 | LPC700 | 120 |
| JD01 | 260 | LAC2CEK | 210 | LJCAG1G | 212 | LJCGG3Q | 213 | LPC702 | 120 |
| JD02 | 260 | LAC2G002 | 210 | LJCAG1H | 212 | LJCGG4L | 213 | LPC704 | 120 |
| JD03 | 260 | LAC2GCE | 210 | LJCAG1K | 212 | LJCJG1T | 213 | LPC706 | 120 |
| JD05 | 260 | LAC2GCEW | 210 | LJCAG1T | 212 | LJCJG1V | 213 | LPC711 | 120 |
| JD06 | 260 | LAC2GDE | 210 | LJCAG1V | 212 | LJCJG2C | 213 | LPC750 | 132 |
| JD07 | 260 | LAC2GEE | 210 | LJCAG1Y | 212 | LJCJG2G | 214 | LPC751 | 132 |
| JD09 | 260 | LAC2GEEW | 210 | LJCAG2C | 212 | LJCJG2Q | 214 | LPC752 | 132 |
| JD11 | 260 | LAC2GEG | 210 | LJCAG2G | 212 | LJCJG2V | 214 | LPC753 | 132 |
| K158A | 258 | LAC2Q002 | 210 | LJCAG2Q | 212 | LJCJG3A | 214 | LPC754 | 132 |
| K217 | 194 | LAC2QCE | 210 | LJCCE1G | 212 | LJCJG3Q | 214 | LPC755 | 132 |
| K217R | 194 | LAC2QCEW | 210 | LJCCE1T | 212 | LJCLG2Q | 214 | LPC756 | 132 |
| K218 | 194 | LAC2QDE | 210 | LJCCE1V | 212 | LPA571 | 83 | LPC790 | 62 |
| K218R | 194 | LAC2QEE | 210 | LJCCE2C | 212 | LPC151CTO | 107 | LPC795 | 61 |
| K220 | 194 | LAC2QEEW | 210 | LJCCE2G | 212 | LPC154CTO | 107 | LPC858 | 73 |
| K220R | 194 | LAC2QEG | 210 | LJCCE2Q | 212 | LPC154LCTO | 107 | LPC858L | 73 |
| K221 | 194 | LAC2QEGW | 210 | LJCCG1G | 212 | LPC172CTO | 111 | LPC5962 | 84 |
| K221R | 194 | LAC2QEH | 211 | LJCCG1H | 212 | LPC330 | 85 | LPC5963 | 84 |
| K222 | 194 | LAC2QEHW | 211 | LJCCG1L | 212 | LPC330L | 85 | LPC5964 | 84 |
| K222R | 194 | LAC2QEK | 211 | LJCCG1T | 212 | LPC331 | 85 | LPC5966 | 84 |
| K223 | 194 | LAC2QGG | 211 | LJCCG1V | 212 | LPC331L | 85 | LPC46740X1 | 136 |
| K223R | 194 | LAC2QGH | 211 | LJCCG2C | 212 | LPC466 | 94 | LPC46740X2 | 136 |
| KH118003532 | 256 | LAC2QGHW | 211 | LJCCG2G | 212 | LPC466B | 80 | LPC151250 | 107 |
| KUL | 74 | LAC2QGK | 211 | LJCCG2Q | 212 | LPC467 | 137 | LQEEH1T | 214 |
| L159 | 246 | LAC2QJK | 211 | LJCDG1T | 212 | LPC467X1 | 136 | LQEEH1V | 214 |
| L160 | 246 | LAC2VDE | 211 | LJCED2G | 212 | LPC467X2 | 136 | LQEGH1V | 214 |
| L160SM | 246 | LAC2VEE | 211 | LJCEE1T | 212 | LPC502 | 74 | LQJEH2C | 214 |
| L160VG | 247 | LAC2VEG | 211 | LJCEE1V | 212 | LPC502A | 74 | LQJEH2CM | 214 |
| | | | | | | | | | |
| L161 | 250 | LAC2VEH | 211 | LJCEE2Q | 212 | LPC502L | 74 | LQJEH2G | 214 |
| L161A | 251 | LAC2VEK | 211 | LJCEE3Q | 212 | LPC513 | 76 | LQJEH2Q | 214 |
| L163 | 246 | LAC3AEE | 211 | LJCEF2Q | 213 | LPC513L | 76 | LQJEH2QM | 214 |
| L164 | 246 | LAC3AEEW | 211 | LJCEG1G | 213 | LPC516 | 72 | LQJEH2V | 214 |
| LAC1GCE | 210 | LAC3AEG | 211 | LJCEG1H | 213 | LPC516A | 72 | LQJEH2VM | 214 |
| LAC1GEE | 210 | LAC3AEGW | 211 | LJCEG1K | 213 | LPC516L | 72 | LQJEH3A | 214 |
| LAC1HCE | 210 | LAC3AEH | 211 | LJCEG1L | 213 | LPC517 | 73 | LQJEH3D | 214 |
| LAC1HEE | 210 | LAC3AEK | 211 | LJCEG1T | 213 | LPC517L | 73 | LQJEH3Q | 214 |
| LAC1HEG | 210 | LAC3AJKW | 211 | LJCEG1TL | 213 | LPC532 | 66 | LQJEH3QM | 214 |
| LAC1KCE | 210 | LAC3DEE | 211 | LJCEG1V | 213 | LPC532L | 66 | LQJEH3X | 214 |
| LAC1KEE | 210 | LAC3DEEW | 211 | LJCEG1X | 213 | LPC540 | 65 | LQJEH4L | 214 |
| LAC1LCE | 210 | LAC3DEG | 211 | LJCEG1Y | 213 | LPC540A | 65 | LQJGH2C | 214 |
| LAC1LEE | 210 | LAC3DEH | 211 | LJCEG2C | 213 | LPC540L | 65 | LQJGH2G | 214 |
| LAC1LEG | 210 | LAC3DEK | 211 | LJCEG2G | 213 | LPC557 | 67 | LQJGH2Q | 214 |
| LAC1TCE | 210 | LAC3HEE | 211 | LJCEG2Q | 213 | LPC557L | 67 | LQJGH2QM | 214 |
| LAC1TDE | 210 | LAC3QEE | 211 | LJCEG2V | 213 | LPC559 | 66 | LQJGH2V | 214 |
| LAC1TEE | 210 | LAC3QEEW | 211 | LJCEG3A | 213 | LPC559L | 66 | LQJGH3Q | 214 |
| LAC1TEG | 210 | LAC3QEG | 211 | LJCEG3D | 213 | LPC570 | 82 | LQJGH4L | 214 |
| LAC1TEK | 210 | LAC3QEGW | 211 | LJCEG3Q | 213 | LPC570L | 82 | LQJJH2G | 214 |
| E. IOTTER | 210 | L50QL5 | 211 | 2002000 | 210 | 2. 30/02 | 32 | 24001120 | 217 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|--------------|------|---------------|------|-----------------|------|-------------|------------|-----------|------|
| LQJJH2Q | 214 | MBJ70-500-10 | 110 | NDF222Q | 197 | NX1161GPLUS | 239 | PCC2Q1Y | 174 |
| LQJJH2V | 214 | MBJ100-250-16 | 109 | NDF223Q | 197 | NX1161L | 239 | PCC2Q2C | 174 |
| MBJ6-150-6 | 110 | MBJ100-250-30 | 109 | NDF312Q | 197 | NX1161LPLUS | 239 | PCC2Q2G | 174 |
| MBJ6-200-6 | 110 | MBJ100-500-16 | 109 | NDF313Q | 197 | NX1161V | 239 | PCC2Q2Q | 174 |
| MBJ10-200-6 | 109 | MBJ100-500-30 | 109 | NDF332Q | 197 | NX1161VPLUS | 239 | PCC2V2G | 174 |
| MBJ10-300-6 | 109 | MBNC82 | 77 | NDF372Q | 197 | NX1181G | 239 | PCC2V2Q | 174 |
| MBJ16-100-6 | 109 | MBNC240 | 76 | NDR141L | 197 | NX1181GPLUS | 239 | PCC2V2V | 174 |
| MBJ16-100-8 | 109 | MBNC240A | 77 | NDR142C | 197 | NX1181L | 239 | PCC3Q2Q | 174 |
| MBJ16-150-6 | 109 | MBNUPCJ82 | 95 | NDR142G | 197 | NX1181LPLUS | 239 | PCC3Q3Q | 174 |
| MBJ16-150-8 | 109 | MBNUPCJ240 | 95 | NDR142Q | 197 | NX1181V | 239 | PCD4L4L | 174 |
| MBJ16-200-6 | 109 | MPSC404SS | 80 | NDR161G | 197 | NX1181VPLUS | 239 | PCT1H1H | 174 |
| MBJ16-200-8 | 109 | NCF222V | 195 | NDR161L | 197 | PBB101EG | 240 | PCT1L1D | 174 |
| | | | 195 | | | | 240 | | |
| MBJ16-250-8 | 109 | NCF223D | | NDR161T | 197 | PBB101GH | | PCT1L1G | 174 |
| MBJ16-300-6 | 109 | NCF223Q | 195 | NDR161V | 197 | PBPLUSCU | 263 | PCT1L1H | 174 |
| MBJ16-300-8 | 109 | NCF313Q | 195 | NDR161Y | 197 | PBS24F | 255 173 | PCT1T1U | 174 |
| MBJ16-500-8 | 109 | NCF333Q | 195 | NDR162C | 197 | PCC1G1G | | PCT1T1H | 174 |
| MBJ25-100-10 | 109 | NCR142C | 195 | NDR162G | 197 | PCC1G1H | 173 | PCT1V1D | 174 |
| MBJ25-150-10 | 109 | NCR142G | 195 | NDR181H | 197 | PCC1H1H | 173 | PCT1V1G | 174 |
| MBJ25-200-6 | 109 | NCR142Q | 195 | NDR181L | 197 | PCC1K1G | 173 | PCT1V1H | 174 |
| MBJ25-200-10 | 109 | NCR161T | 195 | NDR181T | 198 | PCC1K1K | 173 | PG11L | 240 |
| MBJ25-200-12 | 109 | NCR161T1G | 195 | NDR181V | 198 | PCC1L1G | 173 | PG11LPLUS | 240 |
| MBJ25-250-10 | 109 | NCR161V | 195 | NDR181Y | 198 | PCC1L1H | 173 | PG11V | 240 |
| MBJ25-300-10 | 109 | NCR161Y | 195 | NDR182C | 198 | PCC1L1L | 173 | PGT1D1D | 179 |
| MBJ25-500-10 | 109 | NCR162C | 195 | NDR182G | 198 | PCC1T1G | 173 | PGT1G1G | 179 |
| MBJ30-100-10 | 110 | NCR162G | 195 | NDR182Q | 198 | PCC1T1H | 173 | PGT1G1H | 179 |
| MBJ30-150-10 | 110 | NCR162G2Q | 195 | NDR221V | 198 | PCC1T1T | 173 | PGT1H1H | 179 |
| MBJ30-200-10 | 110 | NCR162Q | 195 | NDR311V | 198 | PCC1T1V | 173 | PGT1K1K | 179 |
| MBJ30-250-10 | 110 | NCR162V | 195 | NDR312C | 198 | PCC1V1G | 173 | PGT08CU | 179 |
| MBJ30-300-10 | 110 | NCR181T | 196 | NDR312G | 198 | PCC1V1H | 173 | PGT10CU | 179 |
| MBJ30-500-10 | 110 | NCR181V | 196 | NDR332G | 198 | PCC1V1L | 173 | PHJ2Q2Q | 181 |
| MBJ35-100-10 | 110 | NCR181Y | 196 | NT1141G | 239 | PCC1V1T | 173 | PHJ2V2Q | 181 |
| MBJ35-150-10 | 110 | NCR182C | 196 | NT1141GPLUS | 238 | PCC1V1V | 173 | PHJ2V2V | 181 |
| MBJ35-200-10 | 110 | NCR182G | 196 | NT1141L | 239 | PCC1Y1G | 173 | PHJ3A3A | 181 |
| MBJ35-250-10 | 110 | NCR182Q | 196 | NT1141LPLUS | 238 | PCC1Y1H | 173 | PHJ3D2Q | 181 |
| MBJ35-250-25 | 110 | NCR182V | 196 | NT1141V | 239 | PCC1Y1V | 173 | PHJ3D2V | 181 |
| MBJ35-300-10 | 110 | NCR221T | 196 | NT1141VPLUS | 238 | PCC1Y1Y | 173 | PHJ3Q2Q | 181 |
| MBJ35-500-10 | 110 | NCR221V | 196 | NT1161G | 239 | PCC2C1G | 173 | PHJ3Q3Q | 181 |
| MBJ50-100-10 | 110 | NCR221Y | 196 | NT1161G1TPLUS | 238 | PCC2C1H | 173 | PHR1K1K | 181 |
| MBJ50-150-10 | 110 | NCR222C | 196 | NT1161GPLUS | 238 | PCC2C1K | 173 | PHR1L1L | 181 |
| MBJ50-200-6 | 110 | NCR222G | 196 | NT1161L | 239 | PCC2C1L | 173 | PHR1T1T | 181 |
| MBJ50-200-10 | 110 | NCR222Q | 196 | NT1161LPLUS | 238 | PCC2C1T | 173 | PHR1V1L | 181 |
| MBJ50-200-12 | 110 | NCR311V | 196 | NT1161V | 239 | PCC2C1V | 173 | PHR1V1T | 181 |
| MBJ50-200-16 | 110 | NCR312C | 196 | NT1161VPLUS | 238 | PCC2C2C | 173 | PHR1V1V | 181 |
| MBJ50-200-18 | 110 | NCR312G | 196 | NT1181G | 239 | PCC2G1G | 173 | PHR2C1T | 181 |
| MBJ50-250-10 | 110 | NCR312Q | 196 | NT1181GPLUS | 238 | PCC2G1H | 173 | PHR2C1V | 181 |
| MBJ50-300-6 | 110 | NCR332C | 196 | NT1181L | 239 | PCC2G1L | 173 | PHR2C2C | 182 |
| MBJ50-300-10 | 110 | NCR332G | 196 | NT1181LPLUS | 238 | PCC2G1T | 173 | PHR2G1L | 182 |
| MBJ50-300-16 | 110 | NCR332Q | 196 | NT1181V | 239 | PCC2G1V | 173 | PHR2G1T | 182 |
| MBJ50-300-18 | 110 | NCR372Q | 196 | NT1181VPLUS | 238 | PCC2G1Y | 173 | PHR2G1V | 182 |
| MBJ50-500-10 | 110 | NDF162Q | 197 | NX1141G | 239 | PCC2G2G | 173 | PHR2G2C | 182 |
| MBJ50-500-12 | 110 | NDF162V | 197 | NX1141GPLUS | 238 | PCC2Q1G | 173 | PHR2G2G | 182 |
| MBJ70-300-6 | 110 | NDF182Q | 197 | NX1141L | 239 | PCC2Q1H | 173 | PHR2Q1T | 182 |
| MBJ70-300-10 | 110 | NDF182V | 197 | NX1141LPLUS | 238 | PCC2Q1K | 173 | PHR2Q1V | 182 |
| MBJ70-300-12 | 110 | NDF183D | 197 | NX1141E1 200 | 239 | PCC2Q1L | 173 | PHR2Q2C | 182 |
| MBJ70-300-16 | 110 | NDF183Q | 197 | NX1161G1T | 239 | PCC2Q1T | 173 | PHR2Q2G | 182 |
| MBJ70-300-22 | 110 | NDF222G | 197 | NX1161G1TPLUS | 238 | PCC2Q1V | 173 | PHT1D1D | 182 |
| MB070 000-22 | 110 | NDI ZZZU | 197 | TVI TOTOTTE EUS | 200 | 1 002Q1V | 174 | שוטווווו | 102 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|--------------|------|---------|------|---------|------|---------|------|-----------|------|
| PIT03 | 124 | PTC2Q1T | 180 | RCE531T | 224 | RDC521V | 222 | RDM522C | 223 |
| PLUSCU | 263 | PTC2Q1V | 180 | RCE531V | 224 | RDC531G | 222 | RDM522G | 223 |
| PLUSCU15L | 263 | PTC2Q1Y | 180 | RCE532C | 224 | RDC531H | 222 | RDM522Q | 223 |
| PLUSCULD15QC | 263 | PTC2Q2C | 180 | RCE532G | 224 | RDC531K | 222 | RDM522V | 223 |
| PLUSCULDQC | 263 | PTC2Q2G | 180 | RCE532Q | 224 | RDC531L | 222 | RDM532C | 223 |
| POOLMESH250 | 128 | PTC2Q2Q | 180 | RCE532V | 224 | RDC531T | 222 | RDM532G | 223 |
| POOLMESH350 | 128 | PTC2Q2Q | 181 | RCE541H | 224 | RDC531V | 222 | RDM532Q | 223 |
| POOLMESH2100 | 128 | PTC2V1T | 180 | RCE541L | 224 | RDH541H | 222 | RDM532V | 223 |
| POOLMESH3100 | 128 | | 180 | | 224 | RDH541L | 222 | REP16120L | 59 |
| | | PTC2V1V | | RCE541T | | | | | |
| PTC1D1D | 179 | PTC2V2C | 180 | RCE541V | 224 | RDH541T | 222 | RHC512C | 225 |
| PTC1G1G | 179 | PTC2V2G | 180 | RCE542C | 224 | RDH541V | 222 | RHC512Q | 225 |
| PTC1H1H | 179 | PTC2V2Q | 180 | RCE542G | 224 | RDH542C | 222 | RHC521H | 225 |
| PTC1K1K | 179 | PTC2V2V | 180 | RCE542Q | 224 | RDH542G | 222 | RHC521L | 225 |
| PTC1L1D | 179 | PTC3A2Q | 180 | RCE551H | 224 | RDH542Q | 222 | RHC521V | 225 |
| PTC1L1G | 179 | PTC3A3A | 180 | RCE551L | 224 | RDH542V | 222 | RHC522C | 225 |
| PTC1L1H | 179 | PTC3D2Q | 180 | RCE551T | 224 | RDH551G | 222 | RHC522G | 225 |
| PTC1L1L | 179 | PTC3D2V | 181 | RCE551V | 224 | RDH551H | 222 | RHC522Q | 225 |
| PTC1T1D | 179 | PTC3D3D | 181 | RCE552C | 224 | RDH551L | 222 | RHC531H | 225 |
| PTC1T1G | 179 | PTC3H2Q | 181 | RCE552G | 224 | RDH551T | 222 | RHC531L | 225 |
| PTC1T1H | 179 | PTC3Q2G | 181 | RCE552Q | 224 | RDH551V | 222 | RHC531T | 225 |
| PTC1T1K | 180 | PTC3Q2Q | 181 | RCE561H | 224 | RDH552C | 222 | RHC531V | 225 |
| PTC1T1L | 180 | PTC3Q2V | 181 | RCE561K | 224 | RDH552G | 222 | RHC532C | 225 |
| PTC1T1T | 180 | PTC3Q3A | 181 | RCE561T | 224 | RDH552Q | 222 | RHC532G | 225 |
| PTC1T1V | 180 | PTC3Q3D | 181 | RCE561V | 224 | RDH552V | 222 | RHC532Q | 225 |
| PTC1V1D | 180 | PTC4L2Q | 181 | RCE562C | 224 | RDH561L | 222 | RHC541L | 225 |
| PTC1V1G | 180 | PTC4Y2Q | 181 | RCE562G | 224 | RDH561T | 222 | RHC541V | 225 |
| PTC1V1H | 180 | PTD3H3H | 181 | RCE562Q | 224 | RDH561V | 222 | RHC542C | 225 |
| PTC1V1K | 180 | PTD3Q3Q | 181 | RCE571T | 224 | RDH561Y | 222 | RHC542G | 225 |
| PTC1V1L | 180 | PTF4L4L | 181 | RCE571V | 224 | RDH562C | 222 | RHC542Q | 225 |
| PTC1V1T | 180 | PTF4Y4Y | 181 | RCE572C | 224 | RDH562G | 222 | RJC522C | 226 |
| PTC1V1V | 180 | RAC2C | 227 | RCE572G | 224 | RDH562Q | 222 | RJC522G | 226 |
| PTC1Y1G | 180 | RAC2G | 227 | RCE572Q | 224 | RDH562V | 222 | RJC522Q | 226 |
| PTC1Y1T | 180 | RAC2Q | 227 | RCE581V | 224 | RDH571T | 222 | RJC522V | 226 |
| PTC1Y1Y | 180 | RC70 | 93 | RCE582C | 224 | RDH571V | 222 | RJC531H | 226 |
| PTC2C1D | 180 | RC100 | 93 | RCE582G | 224 | RDH572C | 222 | RJC531K | 226 |
| PTC2C1G | 180 | RCC16 | 61 | RCE582Q | 224 | RDH572G | 222 | RJC531L | 226 |
| PTC2C1H | 180 | RCE511H | 223 | RCE591G | 224 | RDH572Q | 222 | RJC531T | 226 |
| | | | 223 | | | | 222 | | |
| PTC2C1L | 180 | RCE511L | | RCE591V | 224 | RDH572V | | RJC531V | 226 |
| PTC2C1T | 180 | RCE511T | 223 | RCE591Y | 224 | RDH581T | 222 | RJC531Y | 226 |
| PTC2C1V | 180 | RCE511V | 223 | RCE592C | 224 | RDH581V | 222 | RJC532C | 226 |
| PTC2C1Y | 180 | RCE512C | 223 | RCE592G | 224 | RDH582C | 222 | RJC532G | 226 |
| PTC2C2C | 180 | RCE512G | 223 | RCE592Q | 224 | RDH582G | 222 | RJC532Q | 226 |
| PTC2G1D | 180 | RCE512Q | 223 | RCE602G | 224 | RDH582Q | 223 | RJC532V | 226 |
| PTC2G1G | 180 | RCE521G | 223 | RCE602Q | 225 | RDH582V | 223 | RJC541H | 226 |
| PTC2G1H | 180 | RCE521H | 223 | RCE612G | 225 | RDH591V | 223 | RJC541L | 226 |
| PTC2G1K | 180 | RCE521L | 223 | RCEC6 | 107 | RDH591Y | 223 | RJC541T | 226 |
| PTC2G1L | 180 | RCE521T | 223 | RDC511G | 221 | RDH592C | 223 | RJC541V | 226 |
| PTC2G1T | 180 | RCE521V | 223 | RDC511H | 221 | RDH592G | 223 | RJC542C | 226 |
| PTC2G1V | 180 | RCE521Y | 224 | RDC511K | 221 | RDH592Q | 223 | RJC542G | 226 |
| PTC2G2C | 180 | RCE522C | 224 | RDC511L | 221 | RDH592V | 223 | RJC542Q | 226 |
| PTC2G2G | 180 | RCE522G | 224 | RDC511T | 221 | RDH602G | 223 | RJC542V | 226 |
| PTC2Q1D | 180 | RCE522Q | 224 | RDC521G | 222 | RDH602Q | 223 | RJE551L | 226 |
| PTC2Q1G | 180 | RCE522V | 224 | RDC521H | 222 | RDH612G | 223 | RJE551T | 226 |
| PTC2Q1H | 180 | RCE531G | 224 | RDC521K | 222 | RDH612Q | 223 | RJE551V | 226 |
| PTC2Q1K | 180 | RCE531H | 224 | RDC521L | 222 | RDM512G | 223 | RJE552C | 226 |
| PTC2Q1L | 180 | RCE531L | 224 | RDC521T | 222 | RDM512Q | 223 | RJE552G | 226 |
| | | | | | | 4 | | | |

| Part | Page | Part | Page | Part | Page | Part | Page | Part | Page |
|--------------------|------|--------------------|------|------------------------|------|----------|------|--------------------|------|
| RJE552Q | 226 | RRA581T | 220 | RRH612C | 221 | S4291W12 | 256 | SST1V | 172 |
| RJE561L | 226 | RRA581V | 220 | RRH612L | 221 | S4292A | 256 | T111 | 266 |
| RJE561T | 226 | RRA591H | 220 | RRH612Q | 221 | S4292E | 256 | T302A | 265 |
| RJE561V | 226 | RRA591L | 220 | S01 | 255 | S4292J | 256 | T306 | 268 |
| RJE562C | 226 | RRA591T | 220 | S01F | 255 | S4292J16 | 256 | T313 | 264 |
| RJE562Q | 226 | RRA591V | 220 | S02F | 255 | S4292N | 256 | T314 | 264 |
| RJE562V | 226 | RRC511H | 220 | S03F | 255 | S4292S | 256 | T314A | 264 |
| RJE571L | 226 | RRC511L | 220 | S05F | 255 | S4293F | 256 | T315 | 266 |
| RJE571T | 226 | RRC511T | 220 | S06F | 255 | SBCS0810 | 67 | T315A | 266 |
| RJE571V | 226 | RRC511V | 221 | S07 | 255 | SBCS1314 | 67 | T319 | 259 |
| RJE572C | 226 | RRC512C | 221 | S07F | 255 | SBD50 | | T320 | 261 |
| | | | 221 | | 255 | | 260 | | |
| RJE572G | 227 | RRC512G | | S09F | | SBD51 | 260 | T320A | 262 |
| RJE572Q | 227 | RRC512L | 221 | S17F | 255 | SBD55 | 260 | T321 | 267 |
| RJE572V | 227 | RRC512Q | 221 | S20F | 255 | SBS09C | 255 | T321A | 267 |
| RJE581T | 227 | RRC512V | 221 | S429F1C12 | 255 | SBS11C | 255 | T328 | 254 |
| RJE581V | 227 | RRC522C | 221 | S429F1F | 255 | SBS12C | 255 | T328D | 254 |
| RJE582C | 227 | RRC522G | 221 | S429F1J | 255 | SBS13C | 255 | T331 | 267 |
| RJE582G | 227 | RRC522L | 221 | S429F1N | 255 | SCEC25 | 108 | T336 | 264 |
| RJE582Q | 227 | RRC522Q | 221 | S429F1N12 | 255 | SCEC35 | 108 | T343 | 266 |
| RJE582V | 227 | RRC522V | 221 | S429F1S | 255 | SCEC50 | 108 | T343R | 266 |
| RJE591V | 227 | RRC532C | 221 | S429F1W | 255 | SCEC95 | 108 | T372A | 259 |
| RJE592C | 227 | RRC532G | 221 | S429F1W12 | 255 | SCEC120 | 108 | T378L | 269 |
| RJE592G | 227 | RRC532L | 221 | S429F2A | 255 | SCEC150 | 108 | T393 | 269 |
| RJE592Q | 227 | RRC532Q | 221 | S429F2A12 | 255 | SCEC185 | 108 | T394 | 265 |
| RJE592V | 227 | RRC532V | 221 | S429F2E | 255 | SDT34 | 163 | T396 | 267 |
| RJE602C | 227 | RRH542G | 221 | S429F2E16 | 255 | SDT58 | 163 | T403 | 261 |
| RRA521H | 219 | RRH542L | 221 | S429F2J | 255 | SP58 | 57 | T416A | 123 |
| RRA521K | 219 | RRH542Q | 221 | S429F2J16 | 255 | SP58B916 | 57 | T416B | 122 |
| RRA521L | 219 | RRH542V | 221 | S429F2N | 255 | SRC15 | 61 | T416BH | 122 |
| RRA521T | 219 | RRH552C | 221 | S429F2N16 | 255 | SRGBD100 | 129 | T416C | 123 |
| RRA521V | 219 | RRH552G | 221 | S429F2S | 255 | SRGBE100 | 129 | T416CKEY | 123 |
| RRA521Y | 219 | RRH552L | 221 | S429F2S16 | 255 | SRGBG100 | 129 | T416D | 124 |
| RRA531D | 219 | RRH552Q | 221 | S429F2W16 | 255 | SRGC46 | 78 | T416E | 124 |
| RRA531G | 219 | RRH552V | 221 | S429F3B16 | 255 | SRGC46BR | 96 | T416F | 124 |
| RRA531H | 219 | RRH562C | 220 | S429F3F | 255 | SSC1D | 172 | T427 | 257 |
| RRA531K | 219 | RRH562G | 220 | S429F3F16 | 256 | SSC1G | 172 | TAC1D1D | 174 |
| RRA531L | 220 | RRH562L | 220 | S429F3K16 | 256 | SSC1H | 172 | TAC1G1G | 174 |
| RRA531T | 220 | RRH562Q | 220 | S429F3M12 | 256 | SSC1K | 172 | TAC1G1H | 174 |
| RRA531V | 220 | RRH562V | 220 | S429F3N16 | 256 | SSC1L | 172 | TAC1H1H | 174 |
| RRA531Y | 220 | RRH572C | 220 | S429F3S20 | 256 | SSC1T | 172 | TAC1K1K | 174 |
| RRA541G | 220 | RRH572G | 220 | S429F4C16 | 256 | SSC1V | 172 | TAC1K1L | 174 |
| RRA541H | 220 | RRH572L | 220 | S429F4K16 | 256 | SSC1Y | 172 | TAC1L1H | 174 |
| RRA541L | 220 | RRH572Q | 220 | S429F4M16 | 256 | SSC2C | 172 | TAC1L1L | 174 |
| RRA541T | 220 | RRH572V | 220 | S429F4N24 | 256 | SSC2G | 172 | TAC1T1G | 174 |
| RRA541V | 220 | RRH582C | 220 | S429F4P16 | 256 | SSC2Q | 172 | TAC1T1H | 174 |
| RRA541Y | 220 | RRH582G | 220 | S429F4T20 | 256 | SSC2V | 172 | TAC1T1K | 174 |
| RRA551L | 220 | RRH582L | 220 | S429F4X24 | 256 | SSC3A | 172 | TAC1T1L | 174 |
| RRA551T | 220 | RRH582Q | 220 | S429F5A24 | 256 | SSC3D | 172 | TAC1T1T | 174 |
| | 220 | | 220 | | 256 | SSC3H | 172 | | 174 |
| RRA551V RRA561L | 220 | RRH582V RRH592C | 220 | S429F5B24 S429F5E24 | 256 | SSC3Q | 172 | TAC1T1V TAC1V1G | 174 |
| | | | | | | | | | |
| RRA561T | 220 | RRH592G | 220 | S429F5F24 | 256 | SSC4L | 172 | TAC1V1H | 174 |
| RRA561V | 220 | RRH592L | 220 | S429FY922 | 256 | SSD4Y | 172 | TAC1V1K | 174 |
| RRA561Y | 220 | RRH592Q | 220 | S4291F | 256 | SST1G | 172 | TAC1V1L | 174 |
| RRA571T | 220 | RRH592V | 220 | S4291J | 256 | SST1K | 172 | TAC1V1T | 174 |
| RRA571V | 220 | RRH602L | 221 | S4291N12 | 256 | SST1L | 172 | TAC1V1V | 175 |
| RRA581H | 220 | RRH602Q | 221 | S4291W | 256 | SST1T | 172 | TAC1V1Y | 175 |

| Part | Page | Part | Page | Part | Page | Part | Page | Part |
|---------|------|--------------|------|---------------|------|-----------|------|--------------------|
| TAC1Y1L | 175 | TAC3H3D | 176 | TMGBA29L41P | 151 | VFC1H | 204 | VNC2LRH |
| TACTYTE | 175 | TAC3H3H | 176 | TMGBA29L41PT | 151 | VFC1HV3C | 204 | VNC2LRH VNC2QLH |
| | | | | | | | | |
| TAC2C1G | 175 | TAC3Q2C | 176 | TMGBSPLICEKIT | 151 | VFC1K | 204 | VNC2QRH |
| TAC2C1H | 175 | TAC3Q2G | 176 | UGP719 | 133 | VFC1KV3C | 204 | VNC2VLH |
| TAC2C1K | 175 | TAC3Q2Q | 176 | UGP719BP5 | 133 | VFC1L | 204 | VNC2VRH |
| TAC2C1L | 175 | TAC3Q2V | 176 | UGP719SBP5 | 133 | VFC1LV3C | 204 | VSC1G |
| TAC2C1T | 175 | TAC3Q3A | 176 | UGP738 | 133 | VFC1LV8C | 204 | VSC1GV3C |
| TAC2C1V | 175 | TAC3Q3D | 176 | UGP738P5 | 133 | VFC1LV21C | 204 | VSC1GV5C |
| TAC2C1Y | 175 | TAC3Q3Q | 176 | UGP738P10 | 133 | VFC1T | 204 | VSC1GV8C |
| TAC2C2C | 175 | TAC4L2G | 176 | UGP738SBP5 | 133 | VFC1TV3C | 205 | VSC1H |
| TAC2G1G | 175 | TAC4L2Q | 176 | VBC1G | 203 | VFC1TV5C | 205 | VSC1HV3C |
| TAC2G1H | 175 | TAC4L2V | 176 | VBC1H | 203 | VFC1TV21C | 205 | VSC1HV8C |
| TAC2G1K | 175 | TAC4L3D | 176 | VBC1HV3C | 203 | VFC1V | 205 | VSC1HV21C |
| TAC2G1L | 175 | TAC4Y2G | 176 | VBC1K | 203 | VFC1VV3C | 205 | VSC1K |
| | | | | | | | | |
| FAC2G1T | 175 | TAC4Y2Q | 176 | VBC1KV3C | 203 | VFC1VV5C | 205 | VSC1KV3C |
| TAC2G1V | 175 | TAC4Y3D | 176 | VBC1L | 203 | VFC1VV8C | 205 | VSC1KV5C |
| AC2G1Y | 175 | TAD3Q4L | 176 | VBC1LV3C | 203 | VFC1Y | 205 | VSC1KV8C |
| AC2G2C | 175 | TAD3X3X | 176 | VBC1LV5C | 203 | VFC2C | 205 | VSC1L |
| AC2G2G | 175 | TAD4L3H | 176 | VBC1LV8C | 203 | VFC2CV3C | 205 | VSC1LV3C |
| AC2Q1G | 175 | TAD4L3Q | 176 | VBC1LV21C | 203 | VFC2CV8C | 205 | VSC1LV5C |
| AC2Q1H | 175 | TAD4L4L | 176 | VBC1T | 203 | VFC2G | 205 | VSC1LV8C |
| AC2Q1K | 175 | TAD4Y2V | 176 | VBC1TV3C | 203 | VFC2GV3C | 205 | VSC1LV21C |
| AC2Q1L | 175 | TAD4Y3Q | 176 | VBC1TV5C | 203 | VFC2GV5C | 205 | VSC1PV3C |
| AC2Q1T | 175 | TAD4Y4L | 176 | VBC1TV8C | 203 | VFC2GV8C | 205 | VSC1T |
| AC2Q1V | 175 | TAD4Y4Y | 176 | VBC1TV21C | 203 | VFF3Q | 205 | VSC1TV3C |
| AC2Q1Y | 175 | TDSGABC14 | 154 | VBC1V | 203 | VFR2Q | 205 | VSC1TV5C |
| | 175 | TDSGAP | 156 | | 203 | | 205 | VSC1TV8C |
| AC2Q2C | | | | VBC1VV3C | | VFR2QV3C | | |
| AC2Q2G | 175 | TDSGAPA14 | 154 | VBC1VV5C | 203 | VFR2QV5C | 205 | VSC1TV21C |
| AC2Q2Q | 175 | TDSGAPC14 | 155 | VBC1VV8C | 203 | VFR2QV8C | 205 | VSC1V |
| AC2V1T | 175 | TDSGAS | 156 | VBC1VV21C | 203 | VFR2QV21C | 205 | VSC1VV3C |
| AC2V1V | 175 | TDSGAWB | 156 | VBC1Y | 203 | VFR2V | 205 | VSC1VV5C |
| AC2V1Y | 175 | TDSGAWB17 | 155 | VBC1YV3C | 203 | VFR3A | 205 | VSC1VV8C |
| AC2V2C | 175 | TGBA12L06P | 150 | VBC2C | 203 | VFR3D | 205 | VSC1VV21C |
| AC2V2G | 175 | TGBA12L06PT | 150 | VBC2CV3C | 203 | VFR3H | 205 | VSC1Y |
| AC2V2Q | 175 | TGBA16L08P | 150 | VBC2CV5C | 203 | VGC1G | 206 | VSC1YV3C |
| AC2V2V | 175 | TGBA16L08PT | 150 | VBC2CV8C | 203 | VGC1H | 206 | VSC1YV5C |
| AC3A1T | 175 | TGBA18L10P | 150 | VBC2CV21C | 203 | VGC1L | 206 | VSC1YV8C |
| AC3A1V | 175 | TGBA18L10PT | 150 | VBC2G | 203 | VGC1T | 206 | VSC1YV21C |
| AC3A2C | 175 | TGBA20L12P | 150 | VBC2GV3C | 204 | VGC1V | 206 | VSC2C |
| AC3A2G | 175 | TGBA20L12PT | 150 | VBC2GV5C | 204 | VGC1Y | 206 | VSC2CV3C |
| AC3A2Q | 175 | TGBA24L14P | 150 | VBC2GV8C | 204 | VGC2C | 206 | VSC2CV5C |
| | | | | | | | | |
| AC3A2V | 175 | TGBA24L14PT | 150 | VBC2GV21C | 204 | VGC2G | 206 | VSC2CV8C |
| AC3A3A | 175 | TGBA29L18P | 150 | VBC2Q | 204 | VNC1GLH | 208 | VSC2CV21C |
| AC3D1V | 175 | TGBA29L18PT | 150 | VBC2QV3C | 204 | VNC1HLH | 208 | VSC2G |
| AC3D1Y | 175 | TGBSPLICEKIT | 151 | VBC2QV5C | 204 | VNC1HRH | 208 | VSC2GV3C |
| AC3D2C | 175 | TGC2/0 | 70 | VBC2QV8C | 204 | VNC1LLH | 208 | VSC2GV5C |
| AC3D2G | 175 | TMGBA12L15P | 150 | VBC2QV21C | 204 | VNC1LRH | 208 | VSC2GV8C |
| AC3D2Q | 175 | TMGBA12L15PT | 151 | VBC2V | 204 | VNC1TLH | 208 | VSC2GV21C |
| C3D2V | 175 | TMGBA16L19P | 150 | VBC2VV5C | 204 | VNC1TRH | 208 | VSC2Q |
| AC3D3A | 175 | TMGBA16L19PT | 151 | VBC3A | 204 | VNC1VLH | 208 | VSC2QV3C |
| AC3D3D | 175 | TMGBA18L23P | 150 | VBC3H | 204 | VNC1VRH | 208 | VSC2QV5C |
| AC3H2C | 176 | TMGBA18L23PT | 151 | VBR3Q | 204 | VNC2CLH | 208 | VSC2QV8C |
| AC3H2G | 176 | TMGBA20L27P | 150 | VC62 | 79 | VNC2CRH | 208 | VSC2QV21C |
| | | | | | | | | |
| TAC3H2Q | 176 | TMGBA20L27PT | 151 | VC207IT | 71 | VNC2GLH | 208 | VSC2V |
| TAC3H2V | 176 | TMGBA24L33P | 151 | VFC1G | 204 | VNC2GRH | 208 | VSC3A |
| TAC3H3A | 176 | TMGBA24L33PT | 151 | VFC1GV3C | 204 | VNC2LLH | 208 | VSC3D |

| Part | Page | Part | Page |
|----------------|------|--------------|------|
| VSC3H | 202 | WD85 | 260 |
| VSC30 | 202 | WD83 | 260 |
| /SC3Q /SP1K | 202 | WD87 WD88 | 260 |
| | | | |
| VSP1T | 202 | WD94 | 260 |
| VST1G | 202 | WGRS200 | 125 |
| VST1H | 202 | XAC1G1G | 176 |
| VST1L | 203 | XAC1H1H | 176 |
| VTC1G | 206 | XAC1K1K | 176 |
| VTC1H | 206 | XAC1L1L | 176 |
| VTC1K | 206 | XAC1T1T | 176 |
| VTC1L | 206 | XAC1V1H | 176 |
| VTC1LV3C | 206 | XAC1V1L | 176 |
| VTC1LV5C | 206 | XAC1V1T | 176 |
| VTC1T | 206 | XAC1V1V | 177 |
| VTC1TV3C | 206 | XAC1Y1Y | 177 |
| VTC1TV5C | 206 | XAC2C1V | 177 |
| VTC1TV8C | 207 | XAC2C2C | 177 |
| VTC1V | 207 | XAC2G1T | 177 |
| VTC1VV3C | 207 | XAC2G1V | 177 |
| VTC2C | 207 | XAC2G2C | 177 |
| VTC2CV3C | 207 | XAC2G2G | 177 |
| VTC2G | 207 | XAC2Q1V | 177 |
| VTC2GV3C | 207 | XAC2Q1Y | 177 |
| VTC2QV3C | 207 | | 177 |
| | | XAC2Q2C | |
| VTC2QV3C | 207 | XAC2Q2G | 177 |
| VTC2QV5C | 207 | XAC2Q2Q | 177 |
| VTC2QV21C | 207 | XAC2V1V | 177 |
| VTC2V | 207 | XAC2V2C | 177 |
| VTD3Q | 207 | XAC2V2G | 177 |
| VVC1G | 207 | XAC2V2Q | 177 |
| VVC1GV3C | 207 | XAC2V2V | 177 |
| VVC1H | 207 | XAC3A2G | 177 |
| VVC1K | 207 | XAC3A2Q | 177 |
| VVC1L | 207 | XAC3A2V | 177 |
| VVC1LV3C | 207 | XAC3A3A | 177 |
| VVC1T | 207 | XAC3D2C | 177 |
| VVC1TV3C | 207 | XAC3D2G | 177 |
| VVC1V | 207 | XAC3D2Q | 177 |
| VVC1VV3C | 207 | XAC3D2V | 177 |
| | | | |
| VVC1VV21C | 207 | XAC3D3D | 177 |
| VVC1Y | 208 | XAC3H3H | 177 |
| VVR2C | 208 | XAC3Q2G | 177 |
| VVR2CV3C | 208 | XAC3Q2Q | 177 |
| VVR2G | 208 | XAD3Q3Q | 177 |
| VVR2GV3C | 208 | XAD3X3X | 177 |
| VVR2GV5C | 208 | XAD4L2Q | 177 |
| VVR2GV21C | 208 | XAD4Y2Q | 177 |
| VVR2Q | 208 | XB32C2C | 178 |
| VVR2QV3C | 208 | XB32G2G | 178 |
| VVR2QV8C | 208 | XB32L2L | 178 |
| VVR2QV21C | 208 | XB32Q2Q | 178 |
| | | | |
| VVR2V | 208 | XB32V2V | 178 |
| WD80 | 260 | XB43D3D | 178 |
| WD82 | 260 | XBC1K1K | 178 |
| WD83 | 260 | XBC1L1L | 178 |
| WD84 | 260 | XBC1T1T | 178 |



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER



nVent.com/ERICO

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at nVent.com/ERICO and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and feath and/or you'd your warranty.

©2018 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.