


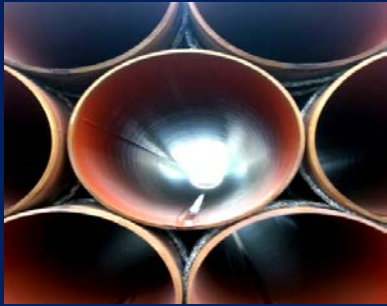

JSW Steel (USA) Inc.

Certifications: API & ISO 9001:2015

Pipe Thickness Capabilities: 0.375"-1.0" (1.125W - 48" only)

Pipe Diameter Capabilities: 24", 26", 30", 36", 42" & 48"

Pipe Length Capabilities: 40' DRL - 80' QRL

API	API	ASTM
Grade B	X60	A252 - 2
X42	X65	A252 - 3
X52	X70	
X56	X80	

New Grades/Chemistries can be developed on request for orders greater than 600 Tons.

ID / OD Coating & Double Joint:

Internal flow liner application for 40' DRL and 80' QRL.

OD FBE / ARO application for 40' DRL and 80' QRL.

Double jointing allows us to furnish up to 80' QRL.

OD Coating Diameter Capabilities: 12", 14", 16", 18", 20", 22", 24", 26", 30", 36", 42" & 48"

ID Coating Diameter Capabilities: 30", 36", 42" & 48"

DJ Diameter Capabilities: 24", 26", 30", 36", 42" & 48"

FBE OD Coating Thickness Capabilities: 12 mil minimum & 26 mil maximum

ARO OD Coating Thickness Capabilities: 15 mil minimum & 60 mil maximum

ID Coating Thickness Capabilities: 1.5 mil minimum & 7 mil maximum

Testing Capabilities

Tensile		
Bend Test	DWTT	HIC Testing
Charpy	Grain Size	PWHT
Chemistry	Hardness	UT

Electronic Certifications (EDI) available

Marking: Semi-Automatic Stenciling

