


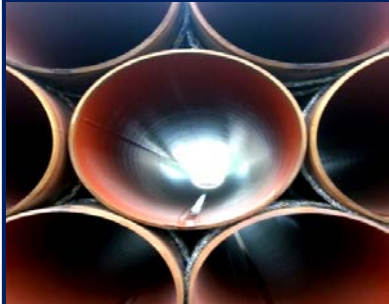

**JSW Steel (USA) Inc.**  
Office: 281.383.5100  
[www.jswsteel.us](http://www.jswsteel.us)

**Certifications:** API & ISO 9001:2015

**Pipe Thickness Capabilities:** 0.375"-1.0" (1.125W - 48" only)

**Pipe Diameter Capabilities:** 24", 26", 30", 36", 42" & 48"

**Pipe Length Capabilities:** 40' DRL - 80' QRL

| API     | API | ASTM     |
|---------|-----|----------|
| Grade B | X60 | A252 - 2 |
| X42     | X65 | A252 - 3 |
| X52     | X70 |          |
| X56     | X80 |          |

*New Grades/Chemistries can be developed on request for orders greater than 600 Tons.*

#### ID / OD Coating & Double Joint:

Internal flow liner application for 40' DRL and 80' QRL.

OD FBE / ARO application for 40' DRL and 80' QRL.

Double jointing allows us to furnish up to 80' QRL.

**OD Coating Diameter Capabilities:** 12", 14", 16", 18", 20", 22", 24", 26", 30", 36", 42" & 48"

**ID Coating Diameter Capabilities:** 30", 36", 42" & 48"

**DJ Diameter Capabilities:** 24", 26", 30", 36", 42" & 48"

**FBE OD Coating Thickness Capabilities:** 12 mil minimum & 26 mil maximum

**ARO OD Coating Thickness Capabilities:** 15 mil minimum & 60 mil maximum

**ID Coating Thickness Capabilities:** 1.5 mil minimum & 7 mil maximum

#### Testing Capabilities

Tensile

Bend Test

Charpy

Chemistry

DWTT

Grain Size

Hardness

HIC Testing

PWHT

UT

*Electronic Certifications (EDI) available*

**Marking:** Semi-Automatic Stenciling

